



MANUAIS DE MOTHERBOARDS MSI

MS-5169 VER. 1  
MS-5169 have four version: ver. 1, ver. 2, ver. 3 and ver. 4



0 = Open/Off      1 = Short/On  
Cyrix(R) 686/686L(R) Processor

CPU Type	S1
6x86 PR166	1 0 0 0 1 0 0 1 1 1
6x86L PR166	1 0 0 0 1 0 1 1 1 0
6x86 PR200	1 0 0 0 0 0 0 1 1 1
6x86L PR200	1 0 0 0 0 0 1 1 1 0

Cyrix(R) 6x86MMX(R) Processor

CPU Type	BUS Speed	S1
6x86MMX PR200	66Mhz	1 1 0 0 1 0 0 0 0 1
	66Mhz	0 0 0 0 1 0 0 0 0 1
6x86MMX PR233	75Mhz	1 1 0 0 0 0 0 0 0 1
	66Mhz	0 0 0 0 1 0 0 0 0 1
6x86MMX PR266	75Mhz	0 1 0 0 0 0 0 0 0 1
	66Mhz	0 0 0 0 1 0 0 0 0 1

Intel(R) Pentium(R) Processor

CPU TYPE	S1
100Mhz	0 0 0 0 1 0 0 0 1 1
133Mhz	1 0 0 0 1 0 0 1 1 1
166Mhz	1 1 0 0 1 0 0 1 1 1
200Mhz	0 1 0 0 1 0 0 1 1 1

Intel(R) Pentium(R) w/MMX(R) Processor

CPU TYPE	S1
166Mhz	1 1 0 0 1 0 1 1 1 0
200Mhz	0 1 0 0 1 0 1 1 1 0
233Mhz	0 0 0 0 1 0 1 1 1 0

AMD(R) K5(R) Processor

CPU TYPE	S1
PR100	0 0 0 0 1 0 0 1 1 1
PR133	1 0 0 0 1 0 0 1 1 1
PR166	1 1 0 0 1 0 0 1 1 1

AMD(R) K6(R) Processor

CPU TYPE	S1
166Mhz	1 1 0 0 1 0 0 0 0 1
200Mhz	0 1 0 0 1 0 0 0 0 1
233Mhz	0 0 0 0 1 0 1 1 0 1
K6-2 350Mhz	0 0 0 1 0 0 1 0 0 0
K6-3D 266Mhz	1 0 1 0 1 0 1 0 0 0
K6 3D 300Mhz	0 1 0 1 0 0 1 0 0 0

Mainboard Jumper Setting

MS-5169 VER. 2

Cyrix(R) 686/686L(R) Processor

CPU Type	S1
6x86 PR166	1 0 0 0 1 1
6x86\6x86L PR200	1 1 0 0 1 1

Cyrix(R) 6x86MMX(R) Processor

CPU Type	BUS Speed	S1
6x86MMX PR200	66Mhz	1 1 0 0 1 1
	66Mhz	0 1 0 0 1 1
6x86MMX PR233	75Mhz	1 1 0 0 0 1
	83Mhz	1 0 0 0 1 0
6x86MMX PR266	66Mhz	0 0 0 0 1 1
	75Mhz	0 1 0 0 0 1
	83Mhz	1 1 0 0 1 0

Intel(R) Pentium(R) Processor

CPU TYPE	S1
100Mhz	0 0 0 0 1 1
133Mhz	1 0 0 0 1 1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1

Intel(R) Pentium(R) w/MMX(R) Processor

CPU TYPE	S1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1
233Mhz	0 0 0 0 1 1

**AMD(R) K5(R) Processor**


CPU TYPE	S1
PR100	0 0 0 0 1 1
PR133	1 0 0 0 1 1
PR166	1 1 0 0 1 1

**AMD(R) K6(R) Processor**

CPU TYPE	S1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1
233Mhz	0 0 0 0 1 1
266Mhz	1 0 1 0 1 1
300Mhz	1 1 1 0 1 1
K6-2 300Mhz	0 1 0 0 0 0
K6-2 333Mhz	0 0 0 1 0 0
K6-2 350Mhz	0 0 0 0 0 0
K6-2 380MHz	1 0 1 1 0 0
K6-2 400MHz	1 0 1 0 0 0

**IDT(R) Processor**

CPU TYPE	S1
200Mhz	0 1 0 0 1 1
225Mhz	0 1 0 0 0 1

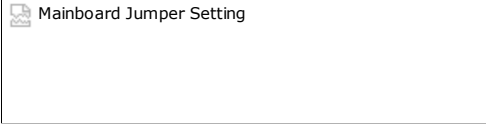

MS-5169 VER. 3 &amp; VER. 4

**Cyrix 686/686L Processor**

CPU TYPE	S1
6x86 PR166	1 0 0 0 1 1
6x86\6x86L PR200	1 1 0 0 1 1

**Cyrix(R) 686MMX Processor**

CPU Type	BUS Speed	S1
6x86MMX PR200	66Mhz	1 1 0 0 1 1
6x86MMX PR233	66Mhz	0 1 0 0 1 1
	75Mhz	1 1 0 0 0 1
	83Mhz	1 0 0 0 1 0
6x86MMX PR266	66Mhz	0 0 0 0 1 1
	75Mhz	0 1 0 0 0 1
	83Mhz	1 1 0 0 1 0

**Intel(R) Pentium(R) Processor**

CPU Type	S1
100Mhz	0 0 0 0 1 1
133Mhz	1 0 0 0 1 1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1

**Intel(R) Pentium w/ MMX Processor**

CPU Type	S1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1
233Mhz	0 0 0 0 1 1

**AMD K5 Processor**

CPU Type	S1
PR100	0 0 0 0 1 1
PR133	1 0 0 0 1 1
PR166	1 1 0 0 1 1

**AMD K6 Processor**

CPU Type	S1
166Mhz	1 1 0 0 1 1
200Mhz	0 1 0 0 1 1
233Mhz	0 0 0 0 1 1
266Mhz	1 0 1 0 1 1
300Mhz	1 1 1 0 1 1
K6-2 300Mhz	0 1 0 0 0 0
K6-2 333Mhz	0 0 0 1 0 0
K6-2 350Mhz	0 0 0 0 0 0
K6-2 400Mhz	1 0 1 0 0 0
K6-2 450Mhz	1 1 1 0 0 0
K6-3 400Mhz	1 0 1 0 0 0
K6-3 450Mhz	1 1 1 0 0 0

**IDT Processor**

CPU Type	S1
200Mhz	0 1 0 0 1 1
250Mhz	0 1 0 0 0 1