

*Issue 7 (March '99) for
Asia Pacific*

IBM

the



IBM Netfinity & PC Server Paper Configurator

solution

...Just better business



Table of Contents

| | | | |
|--|----|--|----|
| Positioning of Configurator Aids..... | 1 | IBM Netfinity Fibre Channel Solutions | 56 |
| Server Product Positioning | 2 | Netfinity Fibre Channel Solution..... | 61 |
| Server Selection Guidance..... | 3 | IBM Netfinity NetBAY3 Stackable Enclosure | 63 |
| IBM Netfinity 3000 Config..... | 4 | IBM Netfinity Rack Cabinet & Options | 65 |
| IBM Netfinity 3500 Config..... | 8 | Appendix A: Tape Drive Attributes ... | 68 |
| IBM Netfinity 5000 Config..... | 12 | Appendix B: Tape Library Attributes | 69 |
| IBM Netfinity 5500 Config..... | 18 | Appendix C: UPS Runtime Estimate (minutes) | 70 |
| IBM Netfinity 5500 M10 Config..... | 26 | Appendix D: Cables, Storage Units, Controllers | 72 |
| IBM Netfinity 7000 Config..... | 34 | | |
| IBM Netfinity 7000 M10 Config..... | 40 | | |
| IBM Ext Storage Exp Unit Overview | 47 | | |
| IBM SCSI Multi-Storage Enclosure for IBM PC Servers (3517002) Config..... | 48 | | |
| IBM PC Server Enterprise Expansion Enclosure (3518001) Config..... | 49 | | |
| IBM Netfinity EXP15 (3520-2RU) Config... | 53 | | |
| IBM SSA Entry Storage Subsystem for PC Servers (3527001) Config..... | 55 | | |

Positioning of Configurator Aids

There are several sources of configuration assistance available which complement one another by providing aid at different levels and with different deliverables. Always verify your hardware configurations with Network Operating System compatibility by accessing the ServerProven™ compatibility pages on the World Wide Web at URL <http://www.pc.ibm.com/ap/serverproven/index.html> ConfigXpert***, a software based configurator, provides the most comprehensive set of systems (desktops, ThinkPads and servers) and compatible options available. It allows the most flexibility in selecting and combining options in order to provide a customized solution to the customer. In addition, a priced quotation*** can be generated for printing, faxing, or exporting to another application.

This document provides information on currently marketed IBM Netfinity and IBM PC Server systems and selected options. It provides pre-selected combinations of memory and hard disk storage along with prerequisite part numbers in order to speed selection and configuration of most basic configurations. A major benefit of this aid is having all the selected part numbers in one place for quick reference.

Using the paper configurator provides quick, yet basic configuration capability without an automatic deliverable to the customer. ConfigXpert has the capability to create supported configurations and provides a priced quotation*** as a deliverable. The same person could use one or both configurators depending on the situation.

The information contained in this document has not been submitted to any formal IBM test. The following paragraph does not apply to the United Kingdom or any country where any such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SOME STATES DO NOT ALLOW DISCLAIMER OF EXPRESS OR IMPLIED WARRANTIES IN CERTAIN TRANSACTIONS. THEREFORE, THIS STATEMENT MAY NOT APPLY TO YOU. THERE IS NO GUARANTEE THAT IBM WILL MARKET ANY PARTICULAR PRODUCT IN YOUR COUNTRY.

The use of this information or the implementation of any of these techniques is a customer responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item may have been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environments do so at their own risk.

The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

IBM PC Server Configuration Tools:

All IBM Configuration tools can be found at the following address in your country:

IBM Netfinity Rack Configurator

IBM Server Paper Configurator

IBM ConfigXpert

Customers can download the ConfigXpert program and weekly updates (Customer version does not contain pricing) over the World Wide Web (WWW) by entering:

Australia: <http://www.pc.ibm.com/au/configxpert/.html>

New Zealand: <http://www.pc.ibm.com/nz/configxpert/.html>


Singapore: <http://www.pc.ibm.com/sg/configxpert/.html>

ASEAN: <http://www.pc.ibm.com/asean/configxpert/.html>

PC Marketing Essentials (IBMers and Business Partners): Found in PC Configurator, Netfinity, or PC Server categories in Other Marketing Information.



Server Product Positioning

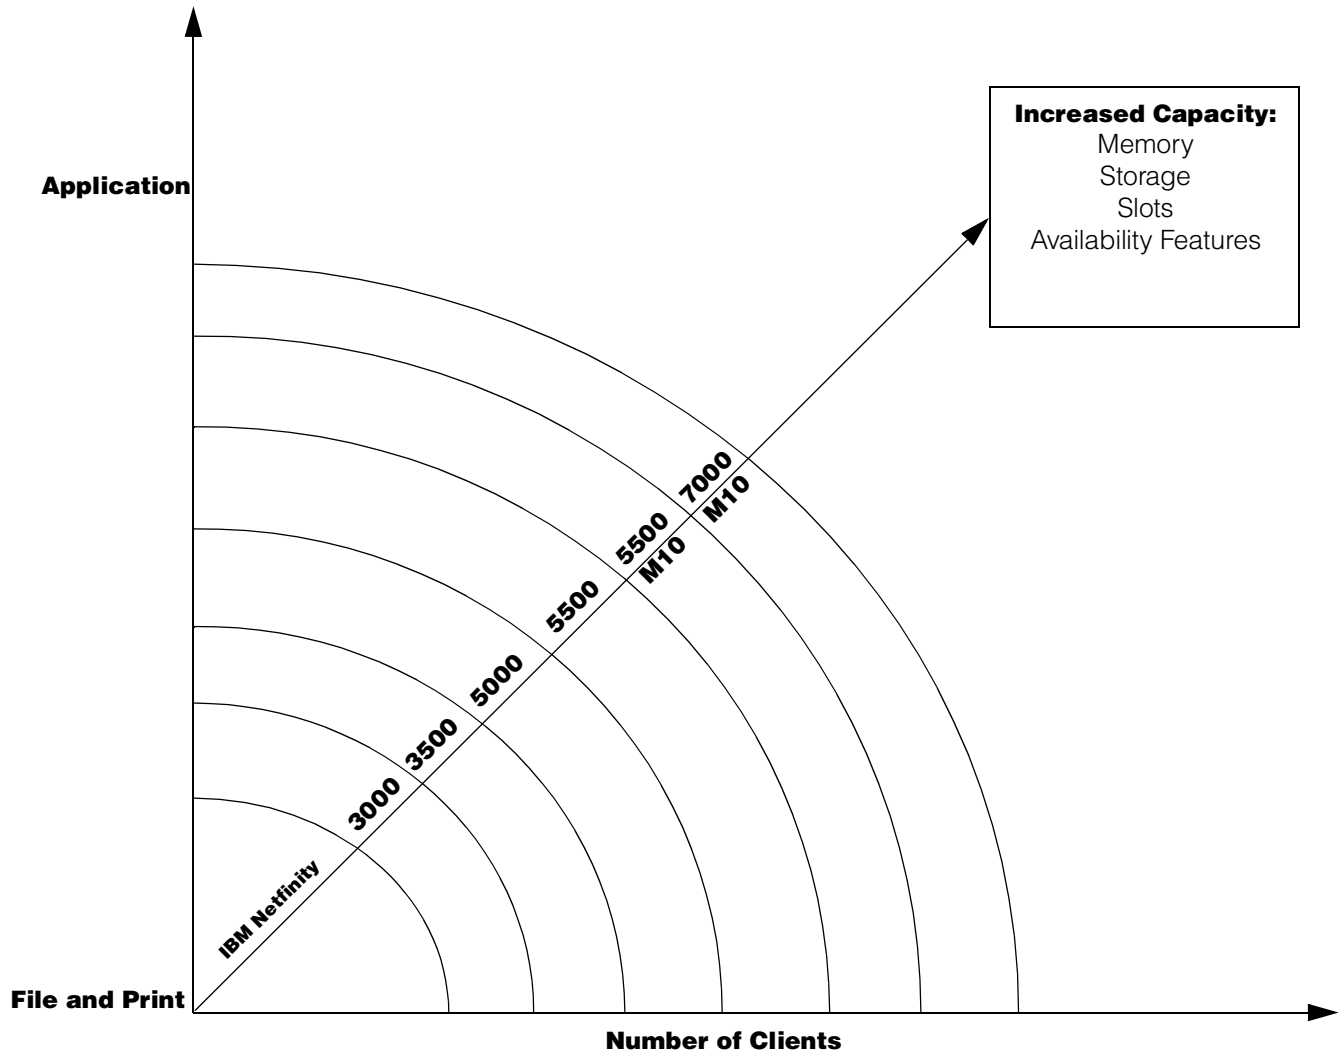

When in a competitive situation, this table suggests the appropriate IBM PC Server to bid against other vendors' equipment. However, as an IBM business partner, you may determine that customer specific requirements may make an alternative IBM solution a better choice.

| Relative Competitive Positioning | Entry | | Mainstream | | | High End |
|----------------------------------|-------------------|----------------|-----------------------------|----------------------|-----------------------------------|------------------------|
| IBM 1st choice | Netfinity 3000 | Netfinity 3500 | Netfinity 5000 | Netfinity 5500 | Netfinity 5500 M10 | Netfinity 7000 M10 |
| IBM 2nd choice | Netfinity 3500 | Netfinity 5000 | Netfinity 5500 | Netfinity 5500 M10 | Netfinity 7000 M10 | RS/6000 AS/400 |
| Compaq | ProSignia200, 720 | ProLiant 800 | ProLiant 1850R, 1600, 1600R | ProLiant 3000, 3000R | ProLiant 3000, 3000R, 5500, 5500R | ProLiant 6500/7000 |
| HP | NetServer E50 | NetServer E50 | NetServer LH11, LH Pro, LC3 | NetServer LH3 | NetServer LH3, LH4 | NetServer LXr, LXr Pro |
| Dell | PowerEdge 2200 | PowerEdge 2200 | PowerEdge 2300, 4350 | PowerEdge 4300, 4350 | PowerEdge 4300, 6350 | PowerEdge 6300 |

Server Selection Guidance

This graph represents general guidelines for selecting the appropriate server based on the number of users that can be supported in a particular application environment. This chart is for general guidance since each customer environment is unique and is unlikely to be precisely represented by any of the specific applications in the chart, but by using the chart, a reasonable approximation can be derived. External Storage Units are utilized when internal capacities are exceeded. Utilize the chart by following the steps outlined on the following page. These are not published benchmark results. Access <http://www.ibm.com/pc/us/techlink/srvperf.html> to obtain benchmark data.

| Application/ Expectation of Maximum # of Users | IBM Netfinity 3000 Uni- Pentium II 450 MHz/512KB | IBM Netfinity 3500 Dual Pentium II 333MHz/512KB | IBM Netfinity 5000 Dual Pentium II 450MHz/512KB | IBM Netfinity 5500 Dual Pentium II 450MHz/512KB | IBM Netfinity 5500 M10 Dual Pentium II Xeon 450MHz/1024KB | IBM Netfinity 7000 M10 Quad Pentium II Xeon 450MHz/ 1024KB |
|---|---|--|--|--|--|---|
| DB Transaction Processing | 900 | 1200 | 2200 | 2300 | 2875 | 4875 |
| # of Users | 900 | 1200 | 2200 | 2300 | 2875 | 4875 |
| # of processors | 1 | 2 | 2 | 2 | 2 | 4 |
| Memory (MB) | 384 | 512 | 1GB | 1GB | 2GB | 4GB |
| # Hard Disk Drives | 4 to 8 | 20 to 26 | 24 to 36 | 24 to 36 | 24 to 36 | 80 to 140 |
| # RAID Adapters | ≥ 1 SCSI | ≥ 2 | ≥ 3 | ≥ 3 | ≥ 3 | ≥ 5 |
| # Network Connections | 1 | 1 | 1 | 1 | 1 | 2 to 3 |
| File and Print | 1000 | 1200 | 2000 | 2000 | 2400 | 5000 |
| # of Users | 1000 | 1200 | 2000 | 2000 | 2400 | 5000 |
| # of Processors | 1 | 2 | 2 | 2 | 2 | 2 |
| Memory (MB) | 512 | 768 | 1GB | 1GB | 1 to 2GB | 3 to 4GB |
| # Hard Disk Drives | 3 to 4 | 8 to 10 | 16 to 24 | 16 to 24 | 20 to 30 | 50 to 90 |
| # RAID Adapters | ≥ 1 SCSI | 1 | 2 | 2 | 2 | ≥ 4 |
| # 100Mbps Ethernet Connections | ≥ 2 | 3 | 4 | 4 | 4 | 8 |
| Lotus Notes | 500 | 800 | 1200 | 1350 | 1900 | 3200 |
| # of Users | 500 | 800 | 1200 | 1350 | 1900 | 3200 |
| # of Processors | 1 | 2 | 2 | 2 | 2 | 4 |
| Memory (MB) | 384 | 512 | 1GB | 1GB | 2GB | 3GB |
| # Hard Disk Drives | 3 to 4 | 12 | 18 | 18 | 10 to 20 | 20 to 30 |
| # RAID Adapters | ≥ 1 SCSI | 1 | 1 | 1 | 2 | 2 |
| # Network Connections | ≥ 1 | ≥ 1 | ≥ 2 | ≥ 2 | ≥ 1 | ≥ 1 |
| SAP Distributed Processing | - | - | - | - | 1275 | 2800 |
| # of Users | - | - | - | - | 1275 | 2800 |
| # of Processors | | | | | 2 | 4 |
| Memory (MB) | | | | | 1GB | ≥ 4GB |
| # Hard Disk Drives | N/A | N/A | N/A | N/A | 24 to 36 | 48 to 60 |
| # RAID Adapters | | | | | ≥ 2 | ≥ 3 |
| # Network Connections | | | | | 1 | 1 |
| SAP Central Version 4.x | - | - | 80 | 85 | 93 | 185 |
| # of Users | - | - | 80 | 85 | 93 | 185 |
| # Processors | | | 2 | 2 | 2 | 4 |
| Memory (MB) | | | 1GB | 1GB | 1GB | ≥ 2GB |
| # Hard Disk Drives | N/A | N/A | 12 to 24 | 12 to 24 | 12 to 24 | 24 to 36 |
| # RAID Adapters | | | ≥ 1 | ≥ 1 | ≥ 1 | ≥ 2 |
| # Network Connections | | | 1 | 1 | 1 | 1 |
| High Availability Features | | | | | | |
| Hot-Swap HDD Bays | - | - | X | X | X | X |
| Hot-Plug PCI Slots | - | - | - | X | X | X |
| Hot-Swap Power | - | - | X | X | X | X |
| Hot-Swap Fans | - | - | - | X | X | X |
| RAID | Opt. | Opt. | Opt. | X | X | Opt. |
| Clustering Support | - | X | X | X | X | X |
| Sys. Mgt. Processor | Opt. | Opt. | X | X | X | X |
| Other Distinguishing Features | | | | | | |
| Max # Processors | 1 | 1 | 2 | 2 | 2 | 4 |
| Max Memory (MB) | 384 | 512 | 1GB | 1GB | 2GB | 8GB |
| Max Int. Storage (GB) | 72.8 | 72.8 | 91 | 109, 473 ¹ | 109, 473 ¹ | 72.8 |
| Max Int. Storage (GB) with Int. Tape drive | 546 | 546 | 91 | 109, 473 ¹ | 109, 473 ¹ | N/A |
| Available PCI Slots | 3 | 4 | 6 | 6 | 6 | 12 |
| 19" Rack Models | - | - | X | X | X | X |
| NetBAY3 Support | - | - | - | X | X | X ² |

1. With a single Netfinity EXP15 Storage unit installed in the standard NetBAY3 included with tower models.
2. With a Rack-to-Tower Conversion Kit installed.

Procedure for Server Selection Guidance Chart

File and Print numbers are Novell Netware-based with all others based on Microsoft Windows NT. Other Networking Operating System (NOS) results could vary. Extensive SAP sizings are available from IBM/SAP Competency Centers. Contact your IBM Marketing Representative for additional information.

Step 1: Determine which application (row) most closely represents the customer's environment.

Step 2: Move from left to right along the row (chosen in Step 1) noting which columns contain numbers that are equal to or greater than the maximum customer's planned number of users.

Step 3: Move up the columns (chosen in Step 2) to the top row to determine which IBM Netfinity or PC Servers should be considered as possible solutions.

Step 4: Evaluate other features such as storage, memory capacity, high availability components, number of available expansion slots, etc., which are unique to each server, in order to determine which is the most appropriate to recommend.

For your reference, configuration information corresponding to the number of users is also provided.



IBM Netfinity 3000 Configurator

| Part Number | Pentium II Processor Speed (MHz) | L2 ECC Cache. (KB) | Memory: std./max. (MB), speed (MHz) | Form Factor | Hard Disk Drive: std. size, speed (RPM) | Internal Max. Hard Drive Capacity (GB) | Wide Ultra SCSI Controller | CD-ROM (IDE) | Slots: total, available | Bays: total, available | Ethernet (Mbps) | Memory Type |
|-------------|----------------------------------|--------------------|-------------------------------------|-------------|---|--|----------------------------|----------------------|-------------------------|------------------------|-----------------|-------------|
| 8476-10U | 266 | 512 | 32/768 100 | Tower | - | 36.4 | PCI Adapter | 32Xmax | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8476-15U | 300/66 | 512 | 32/384, 100 | Tower | - | 72.8 | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8476-20U | 350/100 | 512 | 64/384, 100 | Tower | - | 72.8 | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8476-30U | 400/100 | 512 | 64/384, 100 | Tower | - | 72.8 | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8476-31U | 400/100 | 512 | 64/384, 100 | Tower | 9.1, 7200 | 72.8 ² | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 3 | 10/100 | ECC SDRAM |
| 8476-40U | 450/100 | 512 | 64/384, 100 | Tower | - | 72.8 | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8476-41U | 450/100 | 512 | 64/384, 100 | Tower | 9.1, 7200 | 72.8 ² | PCI Adapter | 32X-14X ³ | 6, 5 | 6, 3 | 10/100 | ECC SDRAM |

1. Not available from IBM after this date. Business Partner inventory may be available.
2. Maximum internal capacities assume replacement of standard hard disk drives with the largest supported IBM hard disk drives.
3. Variable read rate. Actual playback speed will vary and is often less than the maximum possible.

Processor Upgrades

| Pentium II with 512KB Cache | Part Number | Processor Upgrade Support ¹ |
|--|-------------|--|
| IBM Netfinity 300MHz Upgrade with Pentium II Processor | 10L5886 | 10U, 11U |
| IBM Netfinity 350/100MHz, 512KB Processor Upgrade | 10L5883 | All 1xU |
| IBM Netfinity 400/100MHz, 512KB Processor Upgrade | 10L5884 | All 1xU, 2xU |
| IBM Netfinity 450/100MHz, 512KB Processor Upgrade | 10L5900 | All 1xU, 2xU, 3xU |

1. Requires removal of the standard processor. A maximum of one processor may be installed. Upgrades may require a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support> then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

Memory Configurator


| |
|-------------|
| DIMM Socket |
| DIMM Socket |
| DIMM Socket |

| DIMM Description | Part Numbers |
|-----------------------------|--------------|
| 32MB 100MHz ECC SDRAM 3.3V | 01K1133 |
| 64MB 100MHz ECC SDRAM 3.3V | 01K1130 |
| 128MB 100MHz ECC SDRAM 3.3V | 01K1131 |

| Total Memory | Part Number(s) Required Model 15U | Part Number(s) Required Models 16U, 2xU, 3xU, 4xU |
|--------------|---------------------------------------|---|
| 32MB | 32MB Dimm Standard | N/A |
| 64MB | 1 x 01K1133 | 64MB DIMM Standard |
| 96MB | 1 x 01K1130 | 1 x 01K1133 |
| 128MB | 1 x 01K1133, 1 x 01K1130 | 1 x 01K1130 |
| 160MB | 1 x 01K1131 | 1 x 01K1133, 1 x 01K1130 |
| 192MB | 1 x 01K1131, 1 x 01K1133 | 1 x 01K1131 |
| 224MB | 1 x 01K1131, 1 x 01K1130 | 1 x 01K1131, 1 x 01K1133 |
| 256MB | - | 1 x 01K1131, 1 x 01K1130 |
| 288MB | 2 x 01K1131 | - |
| 320MB | 2 x 01K1131, 1 x 01K1130 ¹ | 2 x 01K1131 |
| 384MB (Max) | 3 x 01K1131 ¹ | 3 x 01K1131 ¹ |

This table does not represent all possible memory configurations.
1. Replace standard DIMM.

Internal Hard Disk Configurator



| Total Internal Disk Storage ¹ | Part Number(s) Required, Models 15U, 20U, 30U, 40U | Part Number(s) Required, Models 16U, 21U | Part Number(s) Required, Models 31U, 41U |
|--|--|---|--|
| | 7200 RPM HDD | 7200 RPM HDD | 7200 RPM HDD |
| 0GB ² | Standard | N/A | N/A |
| 4.5GB | 1 x 01K1327 | Standard | N/A |
| 9.1GB | 1 x 20L0553 ⁴ | 1 x 01K1327 | Standard |
| 13.6GB | 1 x 20L0553 ⁴ , 1 x 01K1327 | 1 x 20L0553 ⁴ | 1 x 01K1327 |
| 18.1GB | 4 x 01K1327 | 3 x 01K1327 | 1 x 20L0553 ⁴ |
| 22.7GB | 1 x 20L0554, 1 x 01K1327 | 1 x 20L0554 | 1 x 20L0553 ⁴ , 1 x 01K1327 |
| 27.3GB | 3 x 20L0553 ⁴ | 1 x 20L0554, 1 x 01K1327 | 1 x 20L0554 |
| 31.8GB | 3 x 20L0553 ⁴ , 1 x 01K1327 | 3 x 20L0553 ⁴ | 1 x 20L0554, 1 x 01K1327 |
| 36.4GB | 2 x 20L0554 | 1 x 01K1327, 1 x 20L0553 ⁴ , 1 x 20L0554 | 3 x 20L0553 ⁴ |
| 45.5GB | 2 x 20L0554, 1 x 20L0553 ⁴ | 1 x 01K1327, 2 x 20L0554 | 2 x 20L0554 |
| 54.6GB | 3 x 20L0554 | - | 1 x 20L0553 ⁴ , 2 x 20L0554 |
| 63.7GB | 3 x 20L0554, 1 x 20L0553 ⁴ | 3 x 20L0554, 1 x 20L0553 ^{3,4} | 3 x 20L0554 |
| 72.8GB (max) | 4 x 20L0554 | 4 x 20L0554 ³ | 4 x 20L0554 ³ |

This table does not represent all possible hard drive configurations.

- Total Internal Storage listed is within ± 0.2 GB unless otherwise noted.
- The standard four drop Wide SCSI cable has active termination which provides the required termination for open bay models.
- Requires replacement of standard hard disk drive with largest optional supported hard disk drive.
- Either 01K1328 or 20L0553 may be utilized.

| Bays | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max. Qty. |
|------|--------------------|-----------------|--------------|---------------------|-------------|---|------|--------|----------------|-----------|
| 1 | 5.25" | HH | yes | IDE CD-ROM | 01K1327 | IBM 4.5GB Wide Ultra SCSI HDD | 7200 | SL | 2,3,5,6 | 4 |
| 2 | 5.25" ¹ | HH | yes | open | 01K1328 | IBM 9.1GB Wide Ultra SCSI HDD | 7200 | SL | 2,3,5,6 | 4 |
| 3 | 3.5" | SL | yes | open | 20L0553 | IBM 9.1GB Wide Ultra-2 SCSI HDD ¹ | 7200 | SL | 2,3,5,6 | 4 |
| 4 | 3.5" | SL | yes | diskette | 20L0554 | IBM 18.2GB Wide Ultra-2 SCSI HDD ¹ | 7200 | SL | 2,3,5,6 | 4 |
| 5 | 3.5" | SL ² | no | open | | | | | | |
| 6 | 3.5" | SL ² | no | HDD on Drive Models | | | | | | |

- Performs as a Wide Ultra SCSI device when attached to the standard or an optional Wide Ultra SCSI adapter or when sharing a cable with a non- Ultra-2 device.

- A 3.5" conversion kit is standard in Bay 2 for installation of 3.5" devices.
- Two slim-line bays can be combined to support a single half-high device.

Internal SCSI Cabling

Netfinity 3000 systems have an IBM PCI Fast/Wide Ultra SCSI Adapter and support up to four internal SCSI devices through the 16-bit internal connector or 15 external SCSI devices through the 16-bit external 68-pin High Density connector; however, when internal SCSI devices are installed to the internal connector, only one SCSI device can be supported from the external connector. All models are cabled internally with a four-drop, 16-bit wide SCSI cable with a built-in active terminator at one end. The other end is attached to the internal 68-pin single-ended connector of the SCSI adapter. On the drive models, the hard disk drive (HDD) is attached to the cable connector closest to the active terminator. On open bay models the first disk drive installed should be attached in the same manner. If connecting narrow devices to this cable, additional 68-pin to 50-pin converters (P/N 32G3925) must be ordered. Some narrow devices include a converter in their ship group.

Typical Options

Adapter Slots

| | |
|--------------------------|--------------|
| Slot 6 ISA - Full Length | |
| Slot 5 ISA - Full Length | |
| Slot 4 ISA - Full Length | |
| Slot 3 PCI - Full Length | |
| Slot 2 PCI - Full Length | |
| Slot 1 PCI - Full Length | SCSI Adapter |
| AGP | |

| Part Number | Ethernet ¹ | Failover Support ³ | Adapter Length | Slots Supported |
|------------------------|--|-------------------------------|----------------|-----------------|
| 083341 | IBM Netfinity 10/100 Fault Tolerant Adapter | X | Half | 1, 2, 3 |
| 34L0301 | Netfinity Gigabit Ethernet SX Adapter | X | Half | 1, 2, 3 |
| Token Ring | | | | |
| 34L0501 | Token-Ring 100/16/4 High-Speed PCI Adapter | X | Half | 1, 2, 3 |
| 34L0601 | Token-Ring 16/4 PCI Adapter 2 | X | Half | 1, 2, 3 |
| UPS² | | | | |
| 94G3134(110V) | APC Smart-UPS 700 (32min. runtime at 160VA) | | | |
| 94G4073(220V) | APC Smart-UPS 700 (32min. runtime at 160VA) | | | |
| 94G3135(110V) | APC Smart-UPS 1000 (51min. runtime at 160VA) | | | |
| 94G4074(220V) | APC Smart-UPS 1000 (51min. runtime at 160VA) | | | |

- Netfinity 3000 has an integrated 10/100 PCI Ethernet controller.
- Stated runtimes and power are for typical configurations (approximately 70% of maximum capacity). For additional information see Appendix C: UPS Runtime Estimate.
- These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>.



Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

| Part Number | Monitors |
|-------------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 64574AX | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black |

| Part Number | Description | Bays Supported | SCSI Interface (bit) | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Enclosures ¹ |
|--------------------------|--|----------------|----------------------|---------------------|----------------------|---------------------------|-----------------------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | 2 | 8 | 3.5" HH or 5.25" HH | Y ³ | Y | 3510020 |
| 06H9716 | IBM 4/8GB TR4 Internal SCSI Tape Drive ² | 2, 3 | 8 | 3.5" SL or 5.25" HH | Y ³ | N | 3510020 |
| 01K1319 | IBM 10/20GB NS Internal SCSI Tape Drive | 2, 3 | 8 | 3.5" SL or 5.25" HH | Y ³ | Y | 3510020 |
| Associated Options | | | | | | | |
| 32G3925 | SCSI 68-pin to 50-pin Converter | - | 8-16 | Internal | - | Y | - |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ⁴ | - | 8/16 | Desktop | - | - | - |

- To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section, and the desired enclosure, then refer to Appendix D: Cables - Storage Units - Controllers.
 - SCSI 68-pin to 50-pin Converter (P/N 32G3925) is required.
 - Tape drive is capable of self termination.
 - Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Terminator (P/N 32G3918).
- NOTE: SCSI support is provided by system unit onboard (standard) controller (no RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. Additional tape attributes can be found in Appendix A: Tape Drive Attributes.

Other Selected Options

Note: For a complete list of all IBM and non-IBM option compatibility with Network Operating Systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.pc.ibm.com/ap/serverproven/index.html>

| Part Number | Description | Failover Support ⁹ | Adapter Length | Slots Supported |
|---|---|-------------------------------|----------------|-----------------|
| Systems Management | | | | |
| 94G7578 | PC Server Advanced Systems Management Adapter ¹ | - | Full ISA | 4, 5, 6 |
| 94G5571 | Advanced Systems Management Power Unit ² | - | - | - |
| Storage Controllers | | | | |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter | - | Half PCI | 1,2,3 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 Adapter SCSI Adapter ³ | X | Full PCI | 3 |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache ⁴ | - | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁵ | X | Full PCI | 3 |
| Modem ⁸ | | | | |
| 01K1216 | ISA 56K/33.6Kbps Plug and Play Data/Fax Modem ⁷ | - | Half ISA | 4,5,6 |
| 7852400 | External V.34 Data/Fax Modem | - | - | - |
| External Storage Expansion Units ⁶ | | | | |
| 3517002 | IBM SCSI Multi-Storage Enclosure for IBM PC Servers | - | - | - |

- Netfinity 3000 provides the following integrated system management features - Vital Product Data (VPD) plus thermal, voltage, and fan sensors. For additional functions, optional PC Server Advanced Systems Management Adapter (P/N 94G7578) may be utilized. To enable the adapter's Automated Restart and Alerting as well as Remote Power On/Off features, Advanced Systems Management Power Unit (P/N 94G5571) is required.
- Provides continuous power to the PC Server Advanced Systems Management Adapter (P/N 94G7578) even when the system is powered off.
- Netfinity ServeRAID-3H Ultra2 SCSI Adapter (P/N 01K7207) provides one internal and 2 external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of 3 external LVDS SCSI channels.
- Installs on ServeRAID-3H (P/N 01K7207) to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
- Netfinity ServeRAID-3L Ultra2 SCSI Adapter (P/N 01K7364) provides either one internal or external LVDS SCSI channel.
- External storage expansion units require storage controllers and external cables. For specific configuration requirements, see Appendix D: Cable - Storage Units - Controllers.
- x2 modems are designed to be capable of receiving data up to 56Kbps from an x2 compatible service provider, and transmitting data at up to 33.6Kbps. Public Networks currently limit maximum download speeds to about 53Kbps. Actual speeds depend on many factors and are often less than the maximum possible.
- Due to homologation variances, modem availability may differ by country.
- These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>

Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

Workgroup Intranet Server

| Description | Quantity | Part Number |
|--|----------|--------------------------------|
| IBM Netfinity 3000 (Pentium II 450/64MB/9.1GB) | 1 | 847641U |
| 64MB 100MHz ECC SDRAM DIMM 3.3V ¹ | 1 | 01K1130 |
| IBM 9.1GB Wide Ultra SCSI HDD 7200RPM | 2 | 01K1328 |
| NS20 10/20GB Internal DAT SCSI Drive | 1 | 01K1319 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 1000 | 1 | 94G3135(110V) 94G4074(220V) |

1. For a total of 128MB of system memory.

An Internet server is a server that handles all requests from the Internet (Intranet or Extranet). Usually, this type of server has the same characteristics as a normal file server. The main difference is that an Internet server talks a different language (TCP/IP vs. NETBEUI or IPX/SPX) and often needs to do an extra security check (Firewall). In the case of an Internet server, the server itself talks mostly to just one client, the Internet Service Provider (ISP), instead of many clients like a file server does.

With this in mind, the IBM Netfinity 3000 was selected to provide an affordable price point for the growing Internet server market with Pentium II processing, 128MB of system memory (expandable to 384MB), integrated 10/100 ethernet controller, and high-performance storage, and power protection with an APC Smart-UPS. The configuration includes a tape backup unit for secure backup of critical data in the event of a system or storage failure.

File and Print Server

| Description | Quantity | Part Number |
|--|----------|--------------------------------|
| IBM Netfinity 3000 (Pentium II 266/32MB/0GB) | 1 | 847610U |
| 64MB 100MHz ECC SDRAM DIMM 3.3V ¹ | 1 | 01K1130 |
| IBM 4.51GB Wide Ultra SCSI HDD 7200RPM | 2 | 01K1327 |
| NS20 10/20GB Internal DAT SCSI Drive | 1 | 01K1319 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 700 | 1 | 94G3134(110V) 94G4073(220V) |

1. For a total of 96MB of system memory.

A small business or departmental server is usually required to perform all typical server functions while servicing up to 50 users in a normal workgroup computing environment, but doesn't require the high-end performance and fault tolerance properties of larger servers.

The sample configuration above consists of an IBM Netfinity 3000 with 96MB of memory and 9GB of hard disk space. It has enough processor power and memory to run most current network operating systems comfortably and enough hard disk drive space to store a significant amount of data with additional internal storage expansion still available. Demanding network traffic is effectively handled by the standard 100Mbps Ethernet connection.

This configuration also includes a tape backup unit, monitor, and a UPS to keep the system protected from power surges and outages.



IBM Netfinity 3500 Configurator

Part Number Processor Type/Speed (MHz) L2 ECC Cache. (KB) Memory: std./max. (MB), speed (MHz) Hard Disk Drive: std. size, speed (RPM) Internal Max. Hard Drive Capacity (GB) Hard Drive Controller Type Slots: total, available Bays: total, available Ethernet (Mbps) Memory Type

| | | | | | | | | | | |
|----------|----------------|-----|------------|---|-------------------|------------------------------|------|------|--------|-----------|
| 8644-10U | Pentium II/233 | 512 | 32/512, 66 | - | 36.4 ² | Dual Channel Wide Ultra SCSI | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8644-20U | Pentium II/266 | 512 | 64/512, 66 | - | 36.4 ² | Dual Channel Wide Ultra SCSI | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |
| 8644-30U | Pentium II/333 | 512 | 64/512, 66 | - | 36.4 ² | Dual Channel Wide Ultra SCSI | 6, 5 | 6, 4 | 10/100 | ECC SDRAM |

1. Not available from IBM after this date. Business Partner inventory may be available.

2. Maximum internal capacities assume replacement of standard hard disk drive with the largest supported IBM hard disk drives.

Processor Upgrades

| Pentium II with 512KB Cache | Part Number | SMP Support ¹ | Processor Speed Upgrade ² |
|---|-------------|--------------------------|---------------------------------------|
| IBM Netfinity 233MHz Upgrade with Pentium II Processor | 01K6599 | 10U | - |
| IBM Netfinity 266 MHz Upgrade with Pentium II Processor | 01K6600 | 20U, | 10U |
| IBM Netfinity 333MHz Upgrade with Pentium II Processor | 01K8025 | 30U | 10U ³ , 20U ³ , |

1. One additional processor may be installed, providing a maximum of two.

2. Requires removal of the standard processor. A maximum of two processors may be installed. Upgrades may require a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support>, then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

3. Contact your IBM authorized dealer for additional information if your system board FRU# is 93H7269.

Memory Configurator

| |
|-------------|
| DIMM Socket |
| DIMM Socket |
| DIMM Socket |
| DIMM Socket |


| DIMM Description | Part Number |
|----------------------------------|-------------|
| 32MB 66MHz ECC SDRAM DIMM 3.3V | 04K0073 |
| 64MB 66MHz ECC SDRAM DIMM 3.3V | 04K0074 |
| 128 MB 66MHz ECC SDRAM DIMM 3.3V | 04K0075 |

| Total Memory | Part Number(s) Required Model 30U |
|--------------|---------------------------------------|
| 64MB | 64 MB DIMM standard |
| 96MB | 1 x 04K0073 |
| 128MB | 1 x 04K0074 |
| 224MB | 1 x 04K0073, 1 x 04K0075 |
| 256MB | 1 x 04K0074, 1 x 04K0075 |
| 288MB | 1 x 04K0073, 1 x 04K0074, 1 x 04K0075 |
| 512MB max | 4 x 04K0075 ¹ |

This table does not represent all possible memory configurations.

1. Replace standard DIMM.

Internal Hard Disk Configurator



| Total Internal Disk Storage ¹ | Part Number(s) Required Model 30U |
|--|--|
| | 7200 RPM HDD |
| 0GB ² | Standard |
| 4.5GB | 1 x 01K1327 |
| 9.1GB | 1 x 20L0553 ³ |
| 13.6GB | 1 x 20L0553 ³ , 1 x 01K1327 |
| 18.1GB | 4 x 01K1327 |
| 22.7GB | 1 x 20L0554, 1 x 01K1327 |
| 27.3GB | 3 x 20L0553 ³ |
| 31.8GB | 3 x 20L0553 ³ , 1 x 01K1327 |
| 36.4GB | 2 x 20L0554 |
| 45.5GB | 2 x 20L0554, 1 x 20L0553 ³ |
| 54.6GB | 3 x 20L0554 |
| 63.7GB | 3 x 20L0554, 1 x 20L0553 ³ |
| 72.8GB (max) | 4 x 20L0554 |

This table does not represent all possible hard drive configurations.

1. Total Internal Storage listed is within ± 0.2GB unless otherwise noted.

2. The standard four drop Wide SCSI cable has active termination which provides the required termination for open bay models.

3. Either 01K1328 or 20L0553 may be utilized.

| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max Qty. |
|-----|--------------------|-----------------|--------------|------------|-------------|---|------|--------|----------------|----------|
| 1 | 5.25" | HH | yes | IDE CD-ROM | 01K1327 | IBM 4.5GB Wide Ultra SCSI HDD | 7200 | SL | 2,3,5,6 | 4 |
| 2 | 5.25" ¹ | HH | yes | open | 01K1328 | IBM 9.1GB Wide Ultra SCSI HDD | 7200 | SL | 2,3,5,6 | 4 |
| 3 | 3.5" | SL | yes | open | 76H2687 | IBM Ultrastar 2XP 4.51GB Wide Ultra SCSI HDD | 7200 | SL | 2,3,5,6 | 4 |
| 4 | 3.5" | SL | yes | diskette | 20L0553 | IBM 9.1GB Wide Ultra-2 SCSI HDD ¹ | 7200 | SL | 2,3,5,6 | 4 |
| 5 | 3.5" | SL ² | no | open | 20L0554 | IBM 18.2GB Wide Ultra-2 SCSI HDD ¹ | 7200 | SL | 2,3,5,6 | 4 |
| 6 | 3.5" | SL ² | no | open | | | | | | |

1. Performs as a Wide Ultra SCSI device when attached to the standard or an optional Wide Ultra SCSI adapter or when sharing a cable with a non- Ultra-2 device.

1. A 3.5" conversion kit is standard in Bay 2 for installation of 3.5" devices.

2. Two slim-line bays can be combined to support a single half-high device.

Internal SCSI Cabling

Netfinity 3500 systems have a dual channel Wide Ultra SCSI controller supporting up to four internal SCSI devices through the 16-bit internal connector and 15 external SCSI devices through the 16-bit external 68-pin High Density Connector. All Netfinity models are cabled internally with a four-drop, 16-bit wide SCSI cable with a built-in active terminator at one end of the cable. The other end of the cable is attached to the internal 68-pin single-ended connector (channel A) of the 7895 Wide Ultra SCSI controller. The first disk drive installed should be attached to the cable connector closest to the active terminator. If connecting narrow devices to this cable additional 68-pin to 50-pin converters (P/N 32G3925) must be ordered. Some narrow devices include a converter in their ship group.

Typical Options

| Adapter Slots | Part Number | Ethernet ¹ | Adapter Length | Slots Supported |
|--|-------------|--|----------------|-----------------|
| 1 AGP SVGA Adapter | 08L3341 | IBM Netfinity 10/100 Fault Tolerant Adapter | Half | 2,3,4,5 |
| Token Ring | | | | |
| 2 PCI Half Length | 41H8900 | IBM PCI Token-Ring Adapter | Half | 2,3,4,5 |
| UPS² | | | | |
| 3 PCI - Full Length | 94G3134 | APC Smart-UPS 700 (25min. runtime at 265VA) | | |
| 4 PCI - Full Length | 94G4073 | APC Smart-UPS 700 (25min. runtime at 265VA) | | |
| 5 PCI/ISA - Full Length | 94G3135 | APC Smart-UPS 1000 (42min. runtime at 265VA) | | |
| 6 ISA - Full Length | 94G4074 | APC Smart-UPS 1000 (42min. runtime at 265VA) | | |

1. Netfinity 3500 has an integrated 10/100 PCI Ethernet controller.

2. Stated runtimes and power are for typical configurations (approximately 70% of maximum capacity). For additional information see Appendix C: UPS Runtime Estimate.

Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

| Part Number | Monitors |
|-------------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 65474AX | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black |



| Part Number | Description | Bays Supported | SCSI Interface (bit) | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Enclosures ¹ |
|---------------------------------|--|----------------|----------------------|---------------------|----------------------|---------------------------|-----------------------------------|
| 01K1282 | IBM12/24GB DDS/3 4mm Internal Tape Drive | 2 | 8 | 3.5" HH or 5.25" HH | Y ⁵ | Y | 3510020 |
| 06H9716 | IBM 4/8GB TR4 Internal SCSI Tape Drive ² | 2,3 | 8 | 3.5" SL or 5.25" HH | Y ⁵ | N | 3510020 |
| 01K1319 | IBM 10/20GB NS Internal SCSI Tape Drive | 2,3 | 8 | 3.5" SL or 5.25" HH | Y ⁵ | Y | 3510020 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | 2 | 16 | 5.25"HH | N ⁶ | - | 3510020 ³ |
| Associated Options | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | External | - | - | 3510020 |
| 32G3925 | SCSI 68-pin to 50-pin Converter | - | 8-16 | Internal | - | Y | - |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ⁴ | - | 8/16 | Desktop | - | - | - |

- To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section, and the desired enclosure, then refer to Appendix D: Cables-Storage Units-Controllers.
 - SCSI 68-pin to 50-pin Converter (P/N 32G3925) is required.
 - Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 - Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Terminator (P/N 32G3918).
 - Tape drive is capable of self termination.
 - Termination is provided by the system unit's standard 4-drop SCSI cabling.
- NOTE: SCSI support is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. Additional tape attributes can be found in Appendix A: Tape Drive Attributes.

Other Selected Options

For a complete list of all IBM and non-IBM option compatibility with Network Operating Systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.ibm.com/pc/us/compat>

| Part Number | Description | Adapter Length | Slots Supported |
|---|---|----------------|-----------------|
| Systems Management | | | |
| 94G7578 | PC Server Advanced Systems Management Adapter ¹ | Full ISA | 5,6 |
| 94G5571 | Advanced Systems Management Power Unit | - | - |
| Storage Controllers | | | |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter ² | Half PCI | 2,3,4,5 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 Adapter SCSI Adapter ³ | Full PCI | 2,3,4,5 |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache ⁴ | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁵ | Full PCI | 2,3,4,5 |
| Modem⁶ | | | |
| 01K1216 | ISA 56K/33.6 Kbps Plug and Play Data/Fax Modem ⁷ | Half ISA | 5,6 |
| 7852400 | External V.34 Data/FAX Modem | - | - |
| External Storage Expansion Units⁸ | | | |
| 3517002 | IBM SCSI Multi-Storage Enclosure for IBM PC Servers | - | - |
| 3518001 | IBM PC Server Enterprise Expansion Tower | - | - |

- Requires Advanced Systems Management Power Unit (P/N 94G5571) to enable automated restart and alerting as well as remote power on/off, reset.
- For attachment of external devices only.
- Netfinity ServeRAID-3H Ultra2 SCSI Adapter (P/N 01K7207) provides one internal and 2 external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of 3 external LVDS SCSI channels.
- Installs on ServeRAID-3H P/N 01K7207 to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
- Netfinity ServeRAID-3L Ultra2 SCSI Adapter (P/N 01K7364) provides either one internal or external LVDS SCSI channel.
- Due to homologation variances, modem availability may differ by country.
- x2 modems are designed to be capable of receiving data at up to 56Kbps from an x2 compatible service provider, and transmitting data at up to 33.6Kbps. Public Networks currently limit maximum download speeds to about 53Kbps. Actual speeds depend on many factors and are often less than the maximum possible.
- External storage expansion units require storage controllers and external cables. For specific configuration requirements, see Appendix D: Cables - Storage Units - Controllers.

Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

Application-Internet Server

| Description | Quantity | Part Number |
|--|----------|-----------------|
| IBM Netfinity 3500 (Pentium II 333/64MB/0GB) | 1 | 864430U |
| 128MB 66MHz ECC SDRAM DIMM 3.3V ¹ | 2 | 04K0075 |
| IBM Netfinity 333MHz Upgrade with Pentium II Processor | 1 | 01K8025 |
| IBM 4.51GB Wide Ultra SCSI HDD | 1 | 01K1327 |
| IBM ServeRAID-3L Ultra2 SCSI Adapter (attached to 3517002) | 1 | 01K7364 |
| IBM 12/24GB DDS3 4mm Internal Tape Drive | 1 | 01K1282 |
| IBM Netfinity 10/100 Fault Tolerant Adapter | 2 | 08L3341 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 1000 | 1 | 94G3135/94G4074 |
| External Storage Expansion Unit | | |
| IBM SCSI Multi-Storage Enclosure for IBM PC Servers | 1 | 3517002 |
| IBM PC Server 4.51GB Wide Ultra SCSI Hot-Swap HDD ² | 3 | 94G7491 |
| IBM 1M External 0.8MM SCSI Cable | 1 | 76H3589 |

1. For a total of 320MB of system memory.

2. For a total of 13.5GB of RAID protected Hot-Swap external storage with capacity to grow.

An Internet server is a server that handles all requests from the Internet (Intranet or Extranet). Usually, this type of server has the same characteristics as a normal file server. The main difference is that an Internet server talks a different language (TCP/IP vs. NETBEUI or IPX/SPX) and often needs to do an extra security check (Firewall). In the case of an Internet server, the server itself talks mostly to just one client, the Internet provider, instead of many clients like a file server does.

With this in mind, the IBM Netfinity 3500 was selected to provide an affordable price point for the growing internet server market with two way Pentium II processing, 320MB of system memory (expandable to 512MB), multiple ethernet adapters, and availability features such as RAID protected external Hot-Swap storage and power protection with an APC Smart-UPS.

The network configuration depends on the method that will be used to connect the server to the internet. Usually fast Ethernet routers are used, but if other methods are used, you can add the appropriate adapter. The configuration includes a tape backup unit for secure backup of critical data in the event of a system or storage failure.

File and Print Server

| Description | Quantity | Part Number |
|--|----------|-----------------|
| IBM Netfinity 3500 (Pentium II 333/64MB/0GB) | 1 | 864430U |
| 128MB 66MHz ECC SDRAM DIMM 3.3V ¹ | 1 | 04K0075 |
| IBM 4/8GB TR4 Internal SCSI Tape Drive ² | 1 | 06H9716 |
| SCSI 68-pin to 50-pin Converter | 1 | 32G3925 |
| IBM 4.51GB Wide Ultra SCSI HDD | 2 | 01K1327 |
| G54 Color Monitor 15" (13.7" Viewable Image Size)Stealth black | 1 | 65464AX |
| APC Smart-UPS 700 | 1 | 94G3134/94G4073 |

1. For a total of 192MB of system memory.

2. Requires SCSI 68-pin to 50-pin converter (P/N 32G3925)

A small business or departmental server is usually required to perform all typical server functions while servicing up to 50 users in a normal workgroup computing environment, but doesn't require the high-end performance and fault tolerance properties of larger servers.

The sample configuration above consists of an IBM Netfinity 3500 with 192MB of memory and 8.6GB of hard disk space. It has enough processor power and memory to run most current network operating systems comfortably and enough hard disk drive space to store a significant amount of data with additional internal storage expansion still available. Demanding network traffic is effectively handled by the standard 100Mbps Ethernet connection.

This configuration also includes a tape backup unit, monitor, and a UPS to keep the system protected from power surges and outages.



IBM Netfinity 5000 Configurator

Part Number Pentium II Processor Speed (MHz)¹ SMP Enabled L2 ECC Cache. (KB) Memory: std./max. (MB) Memory Type: 100 MHz SDRAM⁴ Form Factor Hard Disk Drive: std. size, speed (RPM) Internal Max. Hard Drive Capacity (GB) Wide Ultra SCSI Controller Slots⁵ (Total/Avail) Bays: (Total/Avail) Available Removable Media Bays⁶ Advanced System Management⁶ Hot-Swap Components⁵ Redundancy Ethernet (Mbps) CD-ROM³

| | | | | | | | | | | | | | | | | | |
|-----------------------|-----|-------|-----|---------|-----|----------|---|----|--------------|-----|------|--------------|---|--------------|-------|--------|---------|
| 8659-12Y | 350 | 2-way | 512 | 64/1024 | ECC | Tower | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |
| 8659-1SY ² | 350 | 2-way | 512 | 64/1024 | ECC | Rack(5U) | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |
| 8659-22Y | 400 | 2-way | 512 | 64/1024 | ECC | Tower | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |
| 8659-2SY ² | 400 | 2-way | 512 | 64/1024 | ECC | Rack(5U) | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |
| 8659-31Y | 450 | 2-way | 512 | 64/1024 | ECC | Tower | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |
| 8659-3RY ³ | 450 | 2-way | 512 | 64/1024 | ECC | Rack(5U) | - | 91 | Dual Channel | 5/5 | 8, 6 | 1 x 5.25" HH | Y | 5 x HDD Bays | Power | 10/100 | 32X IDE |

- 100 MHz front-side bus.
- Housed in a 19" Rack mountable drawer and ships standard without a keyboard or mouse. Requires IBM Netfinity Rack (9306900), Netfinity NetBAY22 (9306200) or industry standard 19" Rack, EIA-310D, with a minimum depth of 28 inches.
- 32X/14X CD-ROM variable read rate. Actual playback speed will vary and is often less than the maximum possible.
- Memory modules are Registered DIMMs (RDIMM).
- Three 32-bit PCI slots and two combination slots (32-bit PCI/16-bit ISA).
- Definitions: Half High (HH), Hard Disk Drive (HDD).

Processor Upgrades

| Pentium II with 512KB Cache | Part Number | SMP Support ¹ | Processor Speed Upgrade ² |
|--|-------------|--------------------------|--------------------------------------|
| IBM Netfinity 350/100MHz, 512KB Processor Upgrade | 10L5883 | 12Y, 1SY | - |
| IBM Netfinity 400/100MHz, 512KB Processor Upgrade | 10L5884 | 22Y, 2SY | 12Y, 1SY |
| IBM Netfinity 450/100MHz, 512 KB Processor Upgrade | 10L5900 | 31Y, 3RY | 12Y, 1SY, 22Y, 2SY |

- One additional processor may be installed, providing a maximum of two.
- Requires removal of the standard processor. A maximum of two processors may be installed. Upgrades may require a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support>, then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

Memory Configurator

| | |
|-------------------|----------------|
| DIMM Socket - J15 | Standard RDIMM |
| DIMM Socket - J16 | |
| DIMM Socket - J17 | |
| DIMM Socket - J22 | |

| RDIMM Description | Part Numbers |
|---------------------------------|--------------|
| Netfinity 64MB SDRAM ECC RDIMM | 01K7241 |
| Netfinity 128MB SDRAM ECC RDIMM | 01K7262 |
| Netfinity 256MB SDRAM ECC RDIMM | 01K8043 |

| Total Memory | Part Number(s) Required |
|--------------|--------------------------|
| 64MB | Standard on all Models |
| 128MB | 1 x 01K7241 |
| 192MB | 1 x 01K7262 |
| 320MB | 1 x 01K8043 |
| 576MB | 2 x 01K8043 |
| 832MB | 3 x 01K8043 |
| 1024MB (max) | 4 x 01K8043 ¹ |

This table does not represent all possible memory configurations.
1. Replace standard RDIMM.




Internal SCSI Cabling

Netfinity 5000 systems contain a backplane supporting five hot-swap drive bays. The backplane has an integrated SCSI terminator and is connected to one of the two integrated dual-channel SCSI controller connectors by a two drop 16-bit SCSI cable. The second drop is available for supporting an internal removable media device. In the event the standard two drop cable is attached to a RAID controller and a dedicated removable media attachment to the onboard controller is required, an optional, terminated, 16-bit cable is available (Netfinity Two-Drop Internal SCSI Cable P/N 36L9636). The second SCSI channel is available for external device attachment through a rear panel 68-pin high density connector.

Internal Hard Disk Configurator

| Total Int. Disk Storage ¹ | Part Number(s) Required (7200RPM) | | | | Part Number(s) Required (10,000RPM) | | |
|--------------------------------------|-----------------------------------|----------------|----------------|-------------|-------------------------------------|----------------|-------------|
| | 4.5GB | 9.1GB | 18.2GB | 36.4GB | 4.5GB | 9.1GB | 18.2GB |
| 0GB | Standard on Base Models | | | | Standard on Base Models | | |
| 4.5GB | 1 x 94G7429 | - | - | - | 1 x 01K8009 | - | - |
| 9.1GB | 2 x 94G7429 or | 1 x 01K8053 | - | - | 2 x 01K8009 or | 1 x 01K8054 | - |
| 13.5GB | 3 x 94G7429 | - | - | - | 3 x 01K8009 | - | - |
| 18.2GB | 4 x 94G7429 or | 2 x 01K8053 or | 1 x 01K8055 | - | 4 x 01K8009 or | 2 x 01K8054 or | 1 x 01K8503 |
| 22.5GB | 5 x 94G7429 | - | - | - | 5 x 01K8009 | - | - |
| 27.2GB | - | 3 x 01K8053 | - | - | - | 3 x 01K8054 | - |
| 36.4GB | - | 4 x 01K8053 or | 2 x 01K8055 | 1 x 02K0441 | - | 4 x 01K8054 or | 2 x 01K8503 |
| 45.5GB | - | 5 x 01K8053 | - | - | - | 5 x 01K8054 | - |
| 54.6GB | - | - | 3 x 02K0440 | - | - | - | - |
| 72.8GB | - | - | 3 x 02K0440 or | 2 x 02K0441 | - | - | - |
| 91GB (max) | - | - | 5 x 02K0440 | - | - | - | - |



This table does not represent all possible hard drive configurations.
1. Total Internal Storage listed is within ± 0.2GB unless otherwise noted.

| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max. Qty. |
|------|-----------------|-----------------|--------------|----------------------|-------------|---|--------|--------|--------------------|-----------|
| A | 5.25" | HH ¹ | Yes | RM ² Open | 94G7429 | 4.51GB Wide Ultra SCSI hot-swap Hard Disk Drive | 7200 | SL | 1..5 | 5 |
| B | 5.25" | HH ¹ | Yes | IDE CD-ROM | 01K8053 | IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 7200 | SL | 1..5 | 5 |
| C | 3.5" | SL | Yes | Diskette | 01K8055 | IBM Netfinity 18.2GB Wide Ultra SCSI SCA-2 HDD ¹ | 7200 | HH | 1/2, 2/3, 3/4, 4/5 | 2 |
| 1..5 | HS ¹ | SL ³ | Yes | Open | 02K0440 | IBM Netfinity 18.2GB Wide Ultra SCSI Hot-Swap SL HDD | 7200 | SL | 1..5 | 5 |
| | | | | | 02K0441 | IBM Netfinity 36.4GB Wide Ultra SCSI Hot-Swap HDD | 7200 | HH | 1/2, 2/3, 3/4, 4/5 | 2 |
| | | | | | 01K8009 | IBM Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | 10,000 | SL | 1..5 | 5 |
| | | | | | 01K8054 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 10,000 | SL | 1..5 | 5 |
| | | | | | 01K8503 | IBM Netfinity 18.2GB 10K Wide Ultra SCSI SCA-2 HDD ¹ | 10,000 | HH | 1/2, 2/3, 3/4, 4/5 | 2 |

- Definitions: Half High (HH), Slim-Line (SL), Hot-Swap (HS)
- Removable Media (RM) devices only.
- Two slim-line (SL) can be combined to support a single half-high device.

1. Two slim-line (SL) bays can be combined to support a single half-high device.



Typical Options

| Part Number | Description | Failover Support ² | PCI Bus Support | Adapter Length | Slots Supported |
|--|---|-------------------------------|-----------------|----------------|-----------------|
| Ethernet¹ | | | | | |
| 08L3341 | IBM Netfinity 10/100 Fault Tolerant Adapter | X ³ | 32-bit | Half | 1..5 |
| 34L0901 | Netfinity 10/100 Ethernet Adapter | X | 32-bit | Half | 1..5 |
| 34L0301 | Netfinity Gigabit Ethernet SX Adapter | X | 32/64-bit | Half | 1..5 |
| Token Ring | | | | | |
| 34L0501 | Token-Ring 100/16/4 High-Speed PCI Adapter | X | 32-bit | Half | 1..5 |
| 34L0601 | Token-Ring 16/4 PCI Adapter 2 | X | 32-bit | Half | 1..5 |
| Storage Controllers⁴ | | | | | |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter | - | 32-bit | Half | 1..5 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ⁵ | X | 64/32-bit | Full | 1..5 |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache ⁶ | - | - | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁷ | X | 32-bit | Full | 1..5 |
| 32H3811 | IBM SSA RAID Adapter for PC Servers ⁸ | - | 32-bit | Full | 1..5 |

Adapter Slots

| |
|----------------------------|
| Slot 5 PCI Full Length |
| Slot 4 PCI Full Length |
| Slot 3 PCI Full Length |
| Slot 2 PCI/ISA Full Length |
| Slot 1 PCI/ISA Full Length |

1. Netfinity 5000 has an integrated 10/100 PCI Ethernet Controller which also supports failover from an IBM Netfinity 10/100 Fault Tolerant Adapter (P/N 08L3341).
2. These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
3. Supports failover to onboard 10/100 controller. Up to four fault tolerant controllers are supported (including onboard 10/100). Failover limitations vary based on operating environment. For more information access URL <http://www.ibm.com/pc/us/compat>
4. Netfinity 5000 has two integrated Wide Ultra SCSI channels. One is internal and the other is external with a 68-pin High Density connector.
5. Netfinity ServeRAID-3H Ultra2 SCSI Adapter (P/N 01K7207) provides one internal and two external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of three external (0.8 mm VHDCI connectors) LVDS SCSI channels.
6. Installs on ServeRAID-3H P/N 01K7207 to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
7. Provides one LVDS channel which is configurable for either internal or external (0.8 mm VHDCI connectors) usage.
8. System units with greater than 2 GB of system memory are limited to RAID 5 operation only.

| Part # | UPS ¹ |
|------------------------------------|--|
| 94G3135 | APC Smart-UPS 1000 (19min. runtime at 330VA) |
| 94G4074 | APC Smart-UPS 1000 (19min. runtime at 330VA) |
| 94G3136 | APC Smart-UPS 1400 (30min. runtime at 330VA) |
| 94G4075 | APC Smart-UPS 1400 (30min. runtime at 330VA) |
| 94G6674 | APC Smart-UPS 1400 RMB (23min. runtime at 330VA) |
| 94G6675 | APC Smart-UPS 1400 RMB (23min. runtime at 330VA) |
| 94G6676 | APC Smart-UPS 3000 RMB (62min. runtime at 330VA) |
| 94G6677 | APC Smart-UPS 3000 RMB (62min. runtime at 330VA) |
| Redundant Power² | |
| 10L7007 | Netfinity 175 W Redundant Power Supply |

| Part # | Monitors |
|---------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 65474AX | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black |

Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

1. Stated runtimes and power are for typical configurations (approx. 70% of max. capacity). For additional information see Appendix C: UPS Runtime Estimate.
2. Netfinity 5000 provides redundant 175W power supplies within a single 350W unit. By adding optional Netfinity 175W Redundant Power Supply (P/N 10L7007), N+1 redundancy is provided for up to 350W. An additional power cord is included but is not intended to provide a redundant power source. Utilization of two UPS's does not provide additional protection. To determine if a specific configuration requires the optional power supply, see Netfinity 5000 Power Supply Redundancy Requirements table.

| Netfinity 5000 Power Supply Redundancy Requirements | | | | | | |
|--|--------|-------------------------------|---------------------------|-------------------------|-----|-----|
| Processor Qty. | Memory | Hard Disk Drives ¹ | Occupied PCI or ISA Slots | Power Supply Redundancy | | |
| Power supply redundancy provided by standard power supplies | | | | | | |
| 1 | and | ≤ 512MB | and | ≤ 3 SL | and | ≤ 2 |
| 2 | and | ≤ 512MB | and | ≤ 3 SL | and | ≤ 1 |
| Additional power supply (P/N 10L7007) required for power supply redundancy | | | | | | |
| | | > 512MB | or | > 3 SL | or | > 2 |

1. Optional removable media devices count as either 1 HH or 1 SL hard disk drive.
2. Optional Netfinity 175 W Redundant Power Supply (P/N 10L7007) is required for preservation of power supply redundancy in robust configurations.

| Part Number | Description | Bays Supported | Interface | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Enclosures ¹ |
|--|--|----------------|-----------|---------------------|----------------------|---------------------------|-----------------------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | A | 8 | 3.5" HH or 5.25" HH | Y ² | Y | 3510020 |
| 01K1319 | IBM 10/20GB NS Internal SCSI Tape Drive | A | 8 | 3.5" SL or 5.25" HH | Y ² | Y | 3510020, 3551001 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | A | 16 | 5.25" HH | N ³ | - | 3510020 ⁴ |
| Associated Options | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | External | - | - | 3510020 |
| 36L9636 | Netfinity Two-Drop Internal SCSI Cable ⁵ | - | 16 | Internal | Y | - | - |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ⁶ | - | 8/16 | Desktop | - | - | - |
| 3551001 | IBM NetMEDIA Storage Expansion Unit EL ⁷ | - | 16 | Rack | - | - | - |
| External Tape Libraries⁸ | | | | | | | |
| 3447xxx | 3447 Digital Linear Library (desktop-105, rack-106) | - | 16 | Desktop or Rack | - | - | - |
| 3449xxx | 3449 8mm Tape Library (deskside-355, rack-356) | - | Diff. | Deskside or Rack | - | - | - |
| 3570xxx | Magstar MP 3570 Tape Subsystem (models B2x and C2x) | - | Diff. | Rack | - | - | - |

1. To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section, and the desired enclosure, then refer to Appendix D: Cables-Storage Units-Controllers.

2. Tape drive is capable of self termination.

3. Termination is provided by the system unit's standard SCSI cabling.

4. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).

5. Netfinity Two-Drop Internal SCSI Cable (P/N 36L9636) is a wide two-drop terminated cable and is required for attachment of internal tape drives to the onboard SCSI controller of a Netfinity 5000 when the hot-swap backplane is attached to a RAID controller.

6. Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Terminator (P/N 32G3918)

7. Provides a black 3U, 19" rack or NetBAY3 mountable tape enclosure. Provides two full high (FH) or four half high (HH) extended length 5.25" bays. External connector is 0.8mm VHDCI.

8. Tape library attributes and prerequisites are located in Appendix B: Tape Library Attributes

NOTE: SCSI support for tape drives is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. When standard cabling is connected to a RAID controller, tape drives must utilize terminated Netfinity Two-Drop Internal SCSI Cable (P/N 36L9636), and attach to the onboard or other supported controller. Additional tape attributes can be found in Appendix A: Tape Drive Attributes.

Other Selected Options

For a complete list of all IBM and non-IBM option compatibility with Network Operating Systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.ibm.com/pc/us/compat>

| Part Number | Other Options |
|---------------------------|--------------------------------------|
| Rack Related | |
| 10L6972 | IBM Netfinity 5000 Rack-to-Tower Kit |
| 10L7006 | IBM Netfinity 5000 Tower-to-Rack Kit |
| 9306900 | IBM Netfinity Rack |
| 9306200 | Netfinity NetBAY22 |
| Keyboard and Mouse | |
| 28L3640 | Space Saver Keyboard |
| 84G6537 | TrackPoint Caps |
| 01K1260 | TrackPoint IV 104-key Black Keyboard |
| 76H0109 | IBM 104-Key Keyboard |
| 12J3615 | Black Sleek Mouse |

| Part Number | Description | Adapter Length | Slots Supported |
|---|---|--------------------|-----------------|
| Modem¹ | | | |
| 01K1216 | ISA 56K/33.6 Kbps Plug and Play Data/Fax Modem ² | Half ISA | 1, 2 |
| 7852400 | External V.34 Data/FAX Modem | - | - |
| External Storage Expansion Units³ | | Form Factor | |
| 3517002 | IBM SCSI Multi-Storage Enclosure for IBM PC Servers | Tower | |
| 3518001 | IBM PC Server Enterprise Expansion Tower | Tower | |
| 35202RU | IBM Netfinity EXP15 Storage Expansion | Rack (3U) | |
| 3527001 ⁴ | SSA Entry Storage Subsystem for PC Servers | Tower | |

1. Due to homologation variances, modem availability may differ by country.

2. x2 modems are designed to be capable of receiving data up to 56Kbps from an x2 compatible service provider, and transmitting data at up to 33.6Kbps. Public Networks currently limit maximum download speeds to about 53Kbps. Actual speeds depend on many factors and are often less than the maximum possible.

3. External Storage Expansion Units require storage controllers and external cables. For specific configuration requirements see Appendix D: Cables - Storage Units - Controllers.

4. A preconfigured 3527001 (3527-PRO) contains five 9.1GB HDDs (P/N 21H8734) and a 5 M cable pair (P/N 59H7222). Order P/N 34H8388.



Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

Internet Server

| Description | Quantity | Part Number |
|--|----------|-----------------|
| IBM Netfinity 5000 (Pentium II 400/64MB/Open Bay) | 1 | 865922Y |
| Netfinity 128MB SDRAM ECC RDIMM ¹ | 1 | 01K7262 |
| IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter | 1 | 01K7364 |
| 4.51GB Wide Ultra SCSI hot-swap Hard Disk Drive ² | 4 | 94G7429 |
| IBM 20/40GB 8mm SCSI Tape Drive | 1 | 01K1325 |
| Netfinity Two-Drop Internal SCSI Cable | 1 | 36L9636 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 1000 | 1 | 94G3135/94G4074 |
| Netfinity 175 W Redundant Power Supply | 1 | 10L7007 |

1. For a total of 192MB of system memory.
2. For a total of 18.0GB of RAID protected Hot-Swap internal storage.

An internet server is a server that handles all requests from the internet (intranet or extranet). Usually, this type of server has the same characteristics as a file server. The main difference is that an internet server talks a different language (TCP/IP vs. NETBEUI or IPX/SPX) and often needs to do an extra security check (Firewall). In the case of an internet server, the server itself talks mostly to just one client, the Internet Service Provider (ISP), instead of many clients like a file server does.

With this in mind the IBM Netfinity 5000 was selected to provide an affordable price point for the growing internet server market with two way Pentium II processing, 192MB of system memory (expandable to 1GB), and availability features such as RAID protected internal hot-swap storage and APC Smart-UPS power protection.

The network configuration depends on the method that will be used to connect the server to the internet. Usually fast Ethernet routers are used, but if other methods are used, you can add the appropriate adapter. the configuration includes a tape backup unit for secure backup of critical data in the event of a system or storage failure.

File and Print Server

| Description | Quantity | Part Number |
|--|----------|-----------------|
| IBM Netfinity 5000 (Pentium II 350/64MB/Open Bay) | 1 | 865912Y |
| Netfinity 128MB SDRAM ECC RDIMM ¹ | 1 | 01K7262 |
| IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter | 1 | 01K7364 |
| 4.51GB Wide Ultra SCSI hot-swap Hard Disk Drive ² | 5 | 94G7429 |
| IBM 20/40GB 8mm SCSI Tape Drive | 1 | 01K1325 |
| Netfinity Two-Drop Internal SCSI Cable | 1 | 36L9636 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 1000 | 1 | 94G3135/94G4074 |

1. For a total of 192MB of system memory.
2. For a total of 22.5GB of RAID protected Hot-Swap internal storage.

A small business or departmental server is usually required to perform all typical server functions while servicing up to 100 users in a normal workgroup computing environment, but doesn't require the high-end performance and fault tolerance properties of larger servers.

The sample configuration above consists of an IBM Netfinity 5000 with 192MB of memory and 22.5GB of hard disk space. It has enough processor power and memory to run most current network operating systems comfortably and enough hard disk drive space to store a significant amount of data with additional external storage expansion still available. Demanding network traffic is effectively handled by the standard 100 Mbps Ethernet connection.


This configuration also includes a tape backup unit, monitor, and a UPS to keep the system protected during power surges and outages.

Rack Mounted Application Server

| Description | Quantity | Part Number |
|---|----------|-----------------|
| IBM Netfinity 5000 (Pentium II 450/64MB/Open Bay/Rack) | 1 | 86593RY |
| IBM 128 MB SDRAM ECC RDIMM ¹ | 2 | 01K7262 |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter | 1 | 01K7207 |
| IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD ² | 5 | 01K8054 |
| IBM 20/40GB 8 mm SCSI Tape Drive | 1 | 01K1325 |
| Netfinity Two-Drop Internal SCSI Cable | 1 | 36L9636 |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX |
| APC Smart-UPS 1400RMB | 1 | 94G6674/94G4075 |
| Netfinity 175 W Redundant Power Supply | 1 | 10L7007 |
| Industry Standard 19" Rack, EIA-310D, Min. depth of 28" (711 mm) | | |
| IBM Netfinity NetBAY22 | 1 | 9306200 |
| Space Saver Keyboard | 1 | 28L3640 |
| Blank Filler Kit | 2 | 94G6670 |

1. For a total of 320MB of system memory.
2. For a total of 36.4GB useable RAID 5 storage (45.5GB total disk).

An application server differs from a File and Print server in that it has a higher work load, in providing application serving requirements for users. With this in mind the IBM Netfinity 5000 was selected to provide an affordable price point for an application server, with two way Pentium II processing, 192MB of system memory (expandable to 1GB), and availability features such as RAID protected internal Hot-Swap storage and power protection with an APC Smart-UPS.

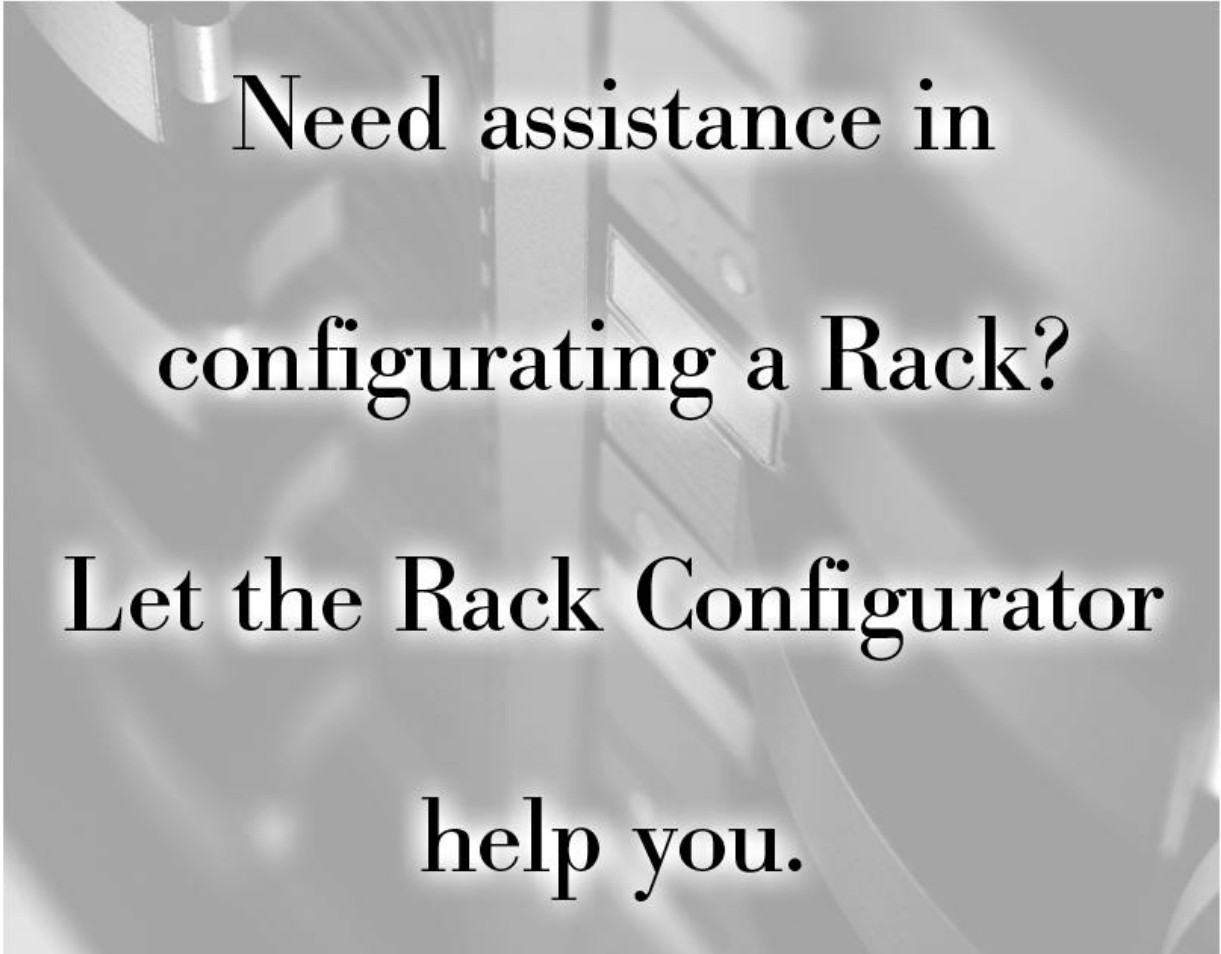The background of the central text area is a grayscale image of a server rack. The image is slightly blurred and shows the vertical structure of the rack with various components and cables.

Need assistance in
configuring a Rack?
Let the Rack Configurator
help you.

DOWNLOAD THE TOOL TODAY FROM:

AUSTRALIA: <http://www.pc.ibm.com/au/configxpert.html>
NEW ZEALAND: <http://www.pc.ibm.com/nz/configxpert.html>
SINGAPORE: <http://www.pc.ibm.com/sg/configxpert.html>
ASEAN: <http://www.pc.ibm.com/asean/configxpert.html>



IBM Netfinity 5500 Configurator

| Part Number | Pentium II Processor Speed (MHz) ⁶ | SMP Enabled | L2 ECC Cache (KB) | Memory: std./max. (MB) ⁵ | Form Factor | Hard Disk Drive: std. size, speed (RPM) | Internal Max. Hard Drive Capacity (GB) | Wide Ultra SCSI Controller | CD-ROM (IDE) | 32 bit PCI Slots (Total/Avail) | 16 bit ISA Slots | Advanced System Management Processor | Hot-Swap Components | Redundancy | Bays: (total, avail) | Ethernet (Mbps) |
|-------------|---|-------------|-------------------|-------------------------------------|--------------------|---|--|----------------------------|------------------------|--------------------------------|------------------|--------------------------------------|---|--------------------------------|----------------------|-----------------|
| 866011U | 350 | 2-way | 512 | 128/1024 | Tower ³ | - | 109 (473) 4 | Dual Channel RAID | (32X-14X) ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power (Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 866041U | 400 | 2-way | 512 | 128/1024 | Tower ³ | - | 109 (473) 4 | Dual Channel RAID | (32X-14X) ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power (Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 866051U | 450 | 2-way | 512 | 128/1024 ⁷ | Tower ³ | - | 109 (473) 4 | Dual Channel RAID | (32X-14X) ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power (Opt.), LAN (Opt.) | 10, 8 | 10/100 |

- Housed in a 19" Rack mountable drawer and ships standard without a keyboard or mouse. Requires IBM Netfinity Rack (9306900), Netfinity NetBAY22 (9306200), or industry standard 19" Rack, EIA-310D, with a minimum depth of 28 inches (711.2 mm) and rack rail to front door clearance of 3 inches (75.4 mm).
- Variable read rate. Actual playback speed will vary and is often less than the maximum possible.
- Tower models come equipped with a single NetBAY3, 3U stackable enclosure. Up to a maximum of three are supported.
- With a single Netfinity EXP15 installed in the standard NetBAY3.
- All memory is 100 MHz ECC SDRAM. Netfinity 5500 models which have Netfinity Upgrade for Pentium II Xeon Processors (P/N 01K8049) installed have a maximum memory capacity of 2 GB.
- Processor access to memory is at 100 MHz.
- Netfinity 5500 models 8660-42U, 4SU, 52U, and 5SU contain a single registered DIMM (RDIMM) which is compatible with Netfinity Upgrade for Pentium II Xeon Processors (P/N 01K8049).

Processor Upgrades


| Pentium II with 512KB Cache | Part Number | SMP Support ¹ | Processor Speed/Cache Upgrade ² |
|---|-------------|--------------------------|--|
| IBM Netfinity 350/100MHz, 512KB Processor Upgrade | 10L5883 | All 1xU | - |
| IBM Netfinity 400/100MHz, 512KB Processor Upgrade | 10L5884 | All 4xU | All 1xU |
| IBM Netfinity 450/100MHz, 512 KB Processor Upgrade | 10L5900 | All 5xU | All 1xU, 4xU |
| Netfinity Upgrade for Pentium II Xeon Processors ³ | 01K8049 | - | All ³ |

- One additional processor may be installed, providing a maximum of two.
- Requires removal of the standard processor. A maximum of two processors may be installed. Upgrades may require a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support>, then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".
- Provides required components for upgrading an IBM Netfinity 5500 to a 2-way SMP Pentium II Xeon processor capable system. Key components include: two slot 2 processor sockets, 440Gx Host Bridge Controller, four RDIMM memory sockets, four VRM sockets, and terminator card. Components that are NOT included and must be ordered separately: processors, memory. All Netfinity 5500 models require processor replacement but only models 8660-x1U and xRU require memory replacement. Refer to Netfinity 5500 M10 configurator for option compatibility with any 5500 containing upgrade P/N 01K8049. A maximum of two processors may be installed. Upgrades may require a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support>, then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

Memory Configurator

| Total Memory | Models 8660-x1U & xRU P/N's Required | Models 8660-x2U & xSU P/N's Required |
|--------------|--------------------------------------|--------------------------------------|
| 128MB | Standard | - |
| 192MB | 1 x 01K8022 | - |
| 256MB | 1 x 01K8023 | Standard |
| 384MB | 2 x 01K8023 | - |
| 512MB | 3 x 01K8023 | 1 x 01K8043 |
| 768MB | 3 x 01K8043 ¹ | 2 x 01K8043 |
| 1024MB | 4 x 01K8043 (max) ¹ | 3 x 01K8043(max) |

This table does not represent all possible memory configurations.
1. Replace standard DIMMs.




| DIMM Description | Part Number | Models 8660-(x1U and xRU) | Models 8660-(x2U and xSU) | Models Upgraded to Pentium II Xeon Processors |
|--|-------------|---------------------------|---------------------------|---|
| Netfinity 64MB SDRAM ECC DIMM ¹ | 01K8022 | X | - | - |
| IBM 128MB SDRAM ECC DIMM ¹ | 01K8023 | X | - | - |

| RDIMM Description | | | | | |
|--|---------|----------------|---|---|----------------|
| Netfinity 128MB SDRAM ECC RDIMM ^{1,3} | 01K7262 | - | - | - | X ³ |
| Netfinity 256MB SDRAM ECC RDIMM ¹ | 01K8043 | X ² | X | - | X ³ |
| Netfinity 512MB SDRAM ECC RDIMM ^{1,3} | 01K7263 | - | - | - | X ³ |

1. DIMMs must be installed in sequence beginning with slot 4 (J1) and ordered from largest to smallest.
2. Requires removal of standard DIMM and cannot co-exist with 64MB (P/N 01K8022) or 128MB (P/N 01K8023) DIMMs.
3. Requires Netfinity Upgrade for Pentium II Xeon Processors (01K8049). See 5500 M10 for sample memory configurations.

Internal Hard Disk Configurator



| Total Internal Disk Storage ¹ | Part Number(s) Required (7200 RPM) | | | | Part Number(s) Required (10,000 RPM) | | |
|--|------------------------------------|----------------|----------------|-------------|--------------------------------------|----------------|-------------|
| | 4.5GB | 9.1GB | 18.2GB | 36.4GB | 4.5GB | 9.1GB | 18.2GB |
| 0GB | Standard on Base Models | | | | Standard on Base Models | | |
| 4.5GB | 1 x 94G7429 | - | - | - | 1 x 01K8009 | - | - |
| 9.1GB | 2 x 94G7429 or | 1 x 01K8053 | - | - | 2 x 01K8009 or | 1 x 01K8054 | - |
| 13.5GB | 3 x 94G7429 | - | - | - | 3 x 01K8009 | - | - |
| 18.2GB | 4 x 94G7429 or | 2 x 01K8053 or | 1 x 01K8055 | - | 4 x 01K8009 or | 2 x 01K8054 or | 1 x 01K8503 |
| 22.5GB | 5 x 94G7429 | - | - | - | 5 x 01K8009 | - | - |
| 27.2GB | 6 x 94G7429 or | 3 x 01K8053 | - | - | 6 x 01K8009 or | 3 x 01K8054 | - |
| 36.4GB | - | 4 x 01K8053 or | 2 x 01K8055 or | 1 X 02K0441 | - | 4 x 01K8054 or | 2 x 01K8503 |
| 45.5GB | - | 5 x 01K8053 | - | - | - | 5 x 01K8054 | - |
| 54.6GB | - | 6 x 01K8053 or | 3 x 01K8055 | - | - | 6 x 01K8054 or | 3 x 01K8503 |
| 72.8GB | - | - | 4 X 02K0440 or | 2 X 02K0441 | - | - | - |
| 91Gb | - | - | 5 X 02K0440 | - | - | - | - |
| 109GB(max) | - | - | 6 X 02K0440 or | 3 X 02K0441 | - | - | - |

- This table does not represent all possible hard drive configurations.
1. Total Internal Storage listed is within ± 0.2 GB unless otherwise noted.

| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max. Qty. |
|----------------------|-------------|-----------------|--------------|------------|-------------|---|--------|--------|------------------|-----------|
| RM 1 | 3.5" | SL | Yes | Diskette | 94G7429 | 4.51GB Wide Ultra SCSI Hot-swap HDD | 7200 | SL | HS 1..6 | 6 |
| RM 2 | 5.25" | HH | Yes | IDE CD-ROM | 01K8053 | IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 7200 | SL | HS 1..6 | 6 |
| RM 3 | 5.25" | HH ¹ | Yes | Open | 01K8055 | IBM Netfinity 18.2GB Wide Ultra SCSI SCA-2 HDD ¹ | 7200 | HH | HS 1/2, 3/4, 5/6 | 3 |
| RM 4 | 5.25" | HH ¹ | Yes | Open | 02K0440 | IBM Netfinity 18.2GB Wide Ultra SCSI Hot-Swap SL HDD | 7200 | SL | HS 1..6 | 6 |
| HS 1..6 | HS | SL ² | Yes | Open | 02K0441 | IBM Netfinity 36.4GB Wide Ultra SCSI Hot-Swap HDD | 7200 | HH | HS 1/2, 3/4, 5/6 | 3 |
| NetBAY3 ³ | 19" Rack | 3U | Yes | Open | 01K8009 | IBM Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | 10,000 | SL | HS 1..6 | 6 |
| | | | | | 01K8054 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 10,000 | SL | HS 1..6 | 6 |
| | | | | | 01K8503 | IBM Netfinity 18.2GB 10K Wide Ultra SCSI SCA-2 HDD ¹ | 10,000 | HH | HS 1/2, 3/4, 5/6 | 3 |

1. Two half-high (HH) bays can be combined to support a single full-high device.
2. Two slim-line (SL) bays can be combined to support a single half-high device.
3. One NetBAY3 is included with tower models and a total of three are supported. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices.

1. Two slim-line (SL) bays can be combined to support a single half-high device.

Internal SCSI Cabling

Netfinity 5500 and 5500 M10 systems contain a backplane supporting six hot-swap drive bays. The backplane is connected to one of the two connectors of the integrated dual-channel ServeRAID controller through a 16-bit SCSI cable. A two-drop 16-bit SCSI cable, with an integrated terminator, is included with the server to support up to two internal removable media devices connected to the second RAID connector or a supported SCSI adapter. Optional Netfinity SCSI Controller Cable (P/N 03K9313) is a 16-bit cable that can be attached to the second RAID connector and routed to the rear panel cutout providing an external 16-bit VHDCI 0.8mm connector. If internal removable devices are required in addition to external RAID device attachment, a supported SCSI adapter must be installed using the standard two-drop SCSI cable for device/adaptor connection. If connecting narrow devices to this cable, additional 68-pin to 50-pin converters (P/N 32G3925) must be ordered. Some narrow devices include a converter in their ship group.

Typical Options



Adapter Slots

| |
|--------------------------------|
| ISA - Full Length |
| 1 Hot Plug PCI Full Length |
| 2 Hot Plug PCI Full Length |
| 3 Hot Plug PCI Full Length |
| 4 Hot Plug PCI Full Length |
| 5 PCI Full Length(Primary Bus) |
| 6 PCI Full Length(Primary Bus) |

| Part Number | Ethernet ¹ | Hot-Plug ⁴ | Failover Support ⁶ | Adapter Length | Slots Supported ⁵ |
|------------------|---|-----------------------|-------------------------------|----------------|------------------------------|
| 08L3341 | IBM Netfinity 10/100 Fault Tolerant Adapter ^{1, 2} | X | X ² | Half | 1..6 |
| 34L0901 | IBM Netfinity 10/100 Ethernet Adapter ¹ | X | X | Half | 1..6 ⁷ |
| 34L0301 | IBM Netfinity Gigabit Ethernet SX Adapter ¹ | X | X | Half | 1..6 |
| Token Ring | | | | | |
| 34L0501 | Token-Ring 100/16/4 High-Speed PCI Adapter | - | X | Half | 1..6 |
| 34L0601 | Token-Ring 16/4 PCI Adapter 2 | - | X | Half | 1..6 |
| UPS ³ | | | | | |
| 94G3136 | APC Smart-UPS 1400 (26 min. runtime at 375 VA) | | | | |
| 94G4075 | APC Smart-UPS 1400 (26 min. runtime at 375 VA) | | | | |
| 94G6674 | APC Smart-UPS 1400RMB (21min. runtime at 375 VA) | | | | |
| 94G6675 | APC Smart-UPS 1400RMB (21min. runtime at 375 VA) | | | | |
| 94G6676 | APC Smart-UPS 3000RMB (55 min. runtime at 375 VA) | | | | |
| 94G6677 | APC Smart-UPS 3000RMB (55 min. runtime at 375 VA) | | | | |

- Netfinity 5500 and 5500 Mxx have an integrated 10/100 PCI Ethernet controller which also supports failover from an IBM Netfinity 10/100 Fault Tolerant Adapter (P/N 08L3341).
- Supports failover to onboard 10/100 controller. Up to four fault tolerant controllers are supported (including onboard 10/100). Failover limitations vary based on operating environment. For more information access URL <http://www.ibm.com/pc/us/compat>
- Stated runtimes and power are for typical configurations (approximately 70% of maximum capacity). For addition information see Appendix C: UPS Runtime Estimate.
- Hot Plug capable. For Network Operating System support access URL <http://www.ibm.com/pc/us/compat>
- PCI Slots 1, 2, 3 and 4 support Hot Plug devices.
- These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
- A maximum of four 34L0901 adapters are supported.

| Part Number | Monitors |
|-------------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 65474AX | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black |

Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

| Part Number | Description | Bays Supported | SCSI Interface (bit) | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Encl. ¹ |
|--------------------------------------|--|---------------------|----------------------|---------------------|----------------------|---------------------------|--------------------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | RM 3, 4 | 8 | 3.5" HH or 5.25" HH | Y ⁶ | Y | 3510020 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | RM 3, 4 | 16 | 5.25" HH | N ⁷ | - | 3510020 ² |
| 01K1320 | IBM 20/40GB DLT SCSI Tape Drive | RM 3/4 ⁸ | 8 | 5.25" FH | Y ⁷ | Y | 3503B0X ² , 3551001 |
| 04K0149 | IBM 35/70GB DLT SCSI Tape Drive | RM 3/4 ⁸ | 16 | 5.25" FH | N ⁷ | - | 3503B0X ² , 3551001 |
| Associated Options | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | External | - | - | 3510020, 3503BOX |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ³ | - | 8/16 | Desktop | | | |
| 3551001 | IBM NetMEDIA Storage Expansion Unit EL ⁴ | - | 16 | Rack | | | |
| 3503BOX | IBM DLT External SCSI Enclosure ⁵ | - | 16 | Desktop | | | |
| External Tape Libraries ⁹ | | | | | | | |
| 3447xxx | 3447 Digital Linear Library (desktop-105, rack-106) | - | 16 | Desktop or Rack | | | |
| 3449xxx | 3449 8mm Tape Library (deskside-355, rack-356) | - | Diff. | Deskside or Rack | | | |
| 3570xxx | Magstar MP 3570 Tape Subsystem (models B2x and C2x) | - | Diff. | Rack | | | |

1. To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section, and the desired enclosure and then refer to Appendix D: Cables - Storage Units - Controllers.
 2. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 3. Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Terminator (P/N 32G3918).
 4. Provides a black 3U, 19" rack or NetBAY3 mountable tape enclosure. Provides two full high (FH) or four half high (HH) extended length 5.25" bays. External connector is 0.8mm VHDCI.
 5. Provides a black desktop DLT tape enclosure. External connector is 68-pin high density. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918)
 6. Tape drive is capable of self termination.
 7. Termination is provided by the system unit's standard SCSI cabling.
 8. Two Half-High (HH) bays can be combined to support a single Full-High (FH) device..
 9. Tape library attributes and prerequisites are located in Appendix B: Tape Library Attributes
- NOTE: SCSI support for tape drives is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. Additional tape attributes can be found in Appendix A: Tape Drive Attributes.

Other Selected Options

For a complete list of all IBM and non-IBM option compatibility with network operating systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.ibm.com/pc/us/compat>

| Part Number | Other Options |
|-------------|---|
| | Power |
| 01K7951 | IBM Netfinity 400 W Hot-Swap Redundant Power Supply II ¹ |
| | Cables |
| 03K9313 | IBM Netfinity SCSI Controller Cable (0.8mm) ² |
| 32G3925 | SCSI 68-pin to 50-pin Converter |
| | Rack and NetBAY3 Related |
| 01K8021 | IBM Netfinity 5500 Rack-to-Tower Kit ³ |
| 01K8020 | IBM Netfinity 5500 Tower-to-Rack Kit |
| 9306900 | IBM Netfinity Rack ⁴ |
| 9306200 | IBM Netfinity NetBAY2 ⁴ |
| 10L6912 | IBM Netfinity NetBAY3 ⁵ |
| 10L6913 | IBM Netfinity Caster Set |
| | Keyboard and Mouse⁶ |
| 28L3640 | Space Saver Keyboard |
| 84G6537 | TrackPoint Caps |
| 01K1260 | TrackPoint IV 104-key Black Keyboard |
| 76H0109 | IBM 104-Key Keyboard |
| 12J3615 | Black Sleek Mouse |

1. Includes a power cord which requires an additional power source.
2. Used for routing the second internal SCSI RAID channel to an ext. 0.8mm connector. Can be used with IBM .8mm to 68-pin SCSI adapter (P/N 01K8017) to provide an ext. 68-pin high density connector.
3. Includes one Netfinity NetBAY3.
4. See IBM Netfinity Rack Cabinet and Options section for supported devices.
5. One NetBAY3 is included with tower models and a total of three are supported. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices.
6. Tower models include both a mouse and keyboard.

| Part Number | Description | Hot-Plug ¹ | Failover Support ¹¹ | PCI Bus Support | Adapter Length | Slots Supported ² |
|-----------------------|---|-----------------------|--------------------------------|-----------------|----------------|------------------------------|
| | Storage Controllers | | | | | |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter | - | - | 32-bit | Half | 1..6 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ³ | X | X | 64/32-bit | Full | 1..6 |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB/Battery-Backup Cache ⁴ | - | - | - | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁵ | X | X | 32-bit | Full | 1..6 |
| 01K7297 | Netfinity Fibre Channel PCI Adapter ⁶ | - | - | 64/32-bit | Half | 1..6 |
| 32H3811 | IBM SSA RAID Adapter for PC Servers ⁷ | - | - | 32-bit | Full | 1..4 |
| | Modem⁸ | | | | | |
| 01K1216 | ISA 56K/33.6 Kbps Plug and Play Data/Fax Modem ⁹ | - | - | - | Half ISA | ISA |
| 7852400 | External V.34 Data/FAX Modem | - | | | | |
| | External Storage Expansion Units¹⁰ | | | | | |
| 35202RU | IBM Netfinity EXP15 | - | | | | |
| 3527001 ¹² | SSA Entry Storage Subsystem for PC Servers | - | | | | |



1. Hot-Plug capable. For Network Operating System support access URL <http://www.ibm.com/pc/us/compat>
2. PCI Slots 1, 2, 3 and 4 support Hot-Plug devices.
3. Netfinity 5500 and 5500 Mxx have two integrated ServeRAID II channels. Netfinity ServeRAID-3H Ultra2 SCSI Adapter (P/N 01K7207) provides one internal and 2 external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of 3 external LVDS SCSI channels.
4. Installs on ServeRAID-3H P/N01K7207 to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
5. Netfinity 5500 and 5500 Mxx have two integrated SeveRAID II channels. Netfinity ServeRAID-3L Ultra2 SCSI Adapter (01K7364) provides either one internal or one external LVDS SCSI channel.
6. See Netfinity Fibre Channel Solutions section for additional configuration information.
7. System units with greater than 2GB of system memory are restricted to RAID 5 operation only.
8. Due to homologation variances, modem availability may differ by country.
9. x2 modems are designed to be capable of receiving data up to 56Kbps from an x2 compatible service provider, and transmitting data at up to 33.6Kbps. Public Networks currently limit maximum download speeds to about 53Kbps. Actual speeds depend on many factors and are often less than the maximum possible.
10. External Storage Expansion Units require storage controllers and external cables. For specific configuration requirements, see Appendix D: Cables - Storage Units - Controllers.
11. These adapters support operation failover, without interruption, to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
12. A preconfigured 3527001 (3527-PRO) contains five 9.1GB HDDs (P/N 21H8734) and a 5 M cable pair (P/N 59H7222). Order P/N 34H8388.

Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

High Availability

| Description | Quantity | Part Number | Usage |
|--|----------|-----------------|-------------------------------|
| IBM Netfinity 5500 (Pentium II 350/128MB/0GB, Tower & NetBAY3) | 1 | 8660-11U | |
| 4.51GB Wide Ultra SCSI hot-swap HDD | 2 | 94G7429 | NOS on mirrored HDD's |
| IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 4 | 01K8053 | RAID 5 with Hot-Spare |
| IBM 20/40GB DLT SCSI Tape Drive | 1 | 01K1320 | |
| IBM Netfinity 10/100 Fault Tolerant Adapter | 1 | 08L3341 | Failover to Integrated Ether. |
| External V.34 Data/Fax Modem | 1 | 7852400 | Remote Management |
| IBM Netfinity 400 W Hot-swap Redundant Power Supply II | 1 | 01K7951 | |
| IBM Netfinity NetBAY3 | 1 | 10L6912 | Enclosure for second UPS |
| APC Smart-UPS 1400 RMB | 2 | 94G6674/94G6675 | Redundant UPS's |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | |


This tower server is configured to act as the foundation for business critical applications, applications your business cannot afford to be without. Configured with enough disk drives to mirror the operating system and provide a standard RAID 5 environment for data, optional hot-swap redundant power, redundant UPS's for power even during a blackout or in the event of a UPS or power cord failure, and an Ethernet adapter that can failover to the onboard Ethernet controller, this server represents the leading edge in high availability. An internal tape drive is included to back-up that all important asset.... data, and a modem is included to allow out-of-band (non-LAN) system management utilizing the Netfinity Advanced System Management Processor.

WEB Server

| Description | Quantity | Part Number | Usage |
|--|----------|-----------------|-----------------------------|
| IBM Netfinity 5500 (Pentium II 350/128MB/0GB, Tower & NetBAY3) | 1 | 8660-11U | - |
| IBM 128MB SDRAM ECC DIMM | 3 | 01K8023 | Total Memory: 512MB |
| IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 6 | 01K8054 | RAID 5 Data Storage |
| High Speed ISDN connection ¹ | 1 | footnote 1 | Connection to WEB |
| IBM 20/40GB DLT SCSI Tape Drive | 1 | 01K1320 | - |
| PCI Fast/wide Ultra SCSI Adapter | 1 | 02K3454 | Tape Controller |
| IBM Netfinity SCSI Controller Cable | 1 | 03K9313 | Provides external RAID |
| IBM Netfinity NetBAY3 | 1 | 10L6912 | Enclosure for EXP15 |
| IBM Netfinity EXP15 | 1 | 35202RU | Provides additional 10 Bays |
| IBM Netfinity EXP10 9.1GB 10K Wide Ultra SCSI SL SCA-2 HDD | 5 | 01K8499 | RAID 5 Data Storage |
| Netfinity 2M Ultra2 SCSI Cable | 1 | 03K9310 | Attaches EXP15 to 03K9313 |
| IBM Netfinity 400 W Hot-Swap Redundant Power Supply II | 1 | 01K7951 | - |
| APC Smart-UPS 3000 RMB | 2 | 94G6676/94G6677 | Redundant UPS's |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |

¹ Select from ServerProven options found on the WEB at URL <http://www.ibm.com/pc/us/compat>. Warranty and service for third party ServerProven products is provided for by the manufacturer, not IBM.

This tower model is configured as the perfect WEB presence for a company ready for eBusiness. With enough disk storage to host a large sales catalog, an optional hot-swap power supply and UPS so that your server is ready when your customers are ready to order, and an ISDN adapter to allow for a speedy connection into the WEB infrastructure, on top of all the integrated high-availability features make this the ideal server for electronic commerce.

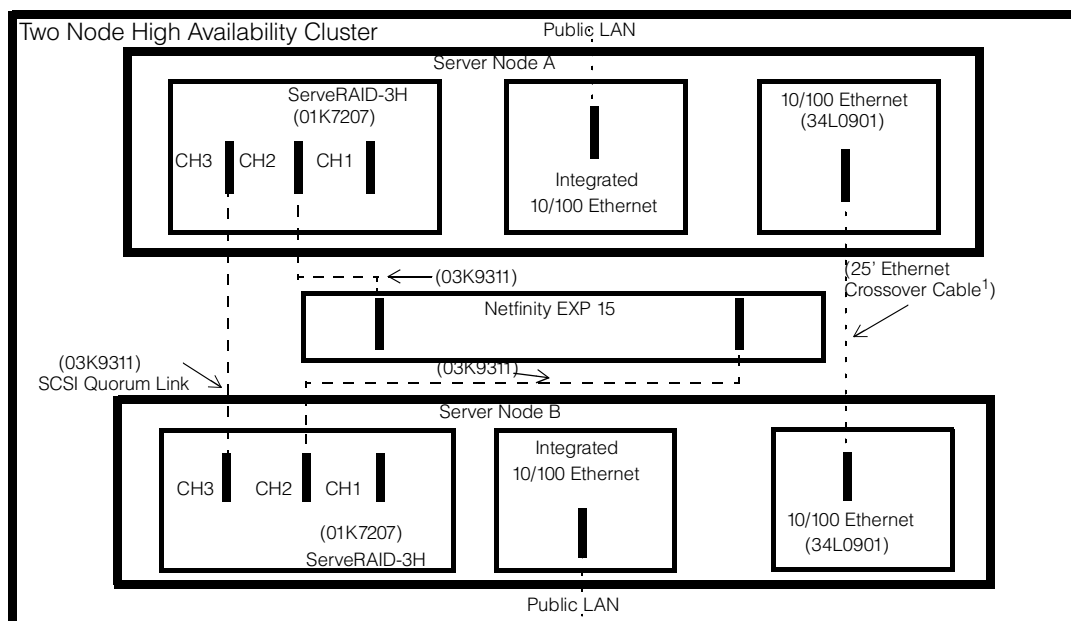

1. Customer supplied Ethernet Crossover Cable may vary in length up to a maximum of 25' (76 m).

Two Node High Availability Cluster¹

| Description | Qty. | Part Number | Usage |
|--|------|-----------------|----------------------------|
| Server Nodes A & B | | | |
| IBM Netfinity 5500 (Pentium II 450/128MB/0GB, Rack) (8U) | 2 | 8660-5RU | |
| IBM Netfinity 450/100MHz, 512KB Processor Upgrade | 2 | 10L5900 | Dual SMP Processing |
| IBM 128 MB SDRAM ECC DIMM | 2 | 01K8023 | Total Memory: 256MB (each) |
| 4.51GB Wide Ultra SCSI Hot-swap HDD | 4 | 94G7429 | NOS on mirrored HDD's |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ³ | 2 | 01K7207 | 2 Channels for EXP 15's |
| IBM 10/100 EtherJet PCI Adapter ² | 2 | 34L0901 | Private Interconnect |
| IBM 35/70GB DLT SCSI Tape Drive | 1 | 04K0149 | |
| PCI Fast/Wide Ultra SCSI Adapter | 1 | 02K3454 | Tape Drive Controller |
| External V34 Data/Fax Modem | 2 | 7852400 | Remote Management |
| IBM Netfinity 400 W Hot-swap Redundant Power Supply II | 2 | 01K7951 | |
| APC Smart-UPS 3000 RMB (3U) | 2 | 94G6676/94G6676 | |
| Storage Expansion Unit | | | |
| IBM Netfinity EXP15 ³ | 1 | 35202RU | |
| IBM Netfinity EXP10 9.1GB Wide Ultra SCSI SCA-2 HDD ³ | 5 | 01K7959 | RAID 5 Shared Storage |
| Netfinity 4.2M Ultra2 SCSI Cable ³ | 2 | 03K9311 | Attach EXP15 to Servers |
| Shared (or single occurrence) Resources | | | |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | |
| Space Saver Keyboard (1U) | 1 | 28L3640 | |
| Netfinity 4.2M Ultra2 SCSI Cable | 1 | 03K9311 | SCSI Quorum Link |
| Industry Standard 19" Rack, EIA-310D, Min. depth of 28" | | | |
| IBM 9306-900 Netfinity Rack | 1 | 9306900 | |
| Monitor Compartment (9U) | 1 | 94G7444 | |
| Netfinity Rack Keyboard Tray | 1 | 28L4707 | |
| Netfinity Console Server Selector Switch (4-port) | 1 | 28L0542 | |
| Power Cable-Type A14 ⁴ | 3 | 94G6667 | |
| 12ft. Console Cable Set | 2 | 94G7447 | |
| Side Panel Kit | 1 | 94G6669 | |
| Blank Filler Kit | 1 | 94G6670 | |

1. Certified for Microsoft Cluster Server.

2. Requires customer supplied Ethernet Crossover Cable which may vary in length up to a maximum of 25' (76 m)

3. By replicating these items, up to a total quantity of four ServeRAID-3H Adapters (plus options) and eleven EXP15's can provide over 2 Terabytes of storage. Additional power and Rack space will be required.

4. Cable length requirements are dependent on component placement within the rack or rack suite. To determine specific configuration requirements use the Netfinity Rack Configurator which is downloadable from Web site http://www.pc.ibm.com/us/netfinity/tech_library.html "Configuration Tools"

Clustering is a group of interconnected computers used as one, unified computing resource. Clustering Netfinity servers, like the IBM Netfinity 5500, provides a high availability solution to keep you in touch with the key applications you need to run your business. High availability solutions are available from IBM to support NT, OS/2, and NetWare operating environments. By using the IBM Netfinity Rack, a high availability cluster with scalable storage expansion can be installed in less floor space.

This sample configuration consists of paired IBM Netfinity 5500 cluster nodes equipped with two-way SMP capability and redundant power supplies. Microsoft Cluster Server (MSCS) has been certified on IBM Netfinity 5500 servers, using the IBM ServeRAID-3H with the EXP15 Storage Expansion Unit. MSCS allows two configured servers, referred to as nodes, to be connected together to form a cluster. Providing system redundancy means that a complete server can fail and client access to server resources is largely unaffected. MSCS extends this theme by also allowing software failures at an application level as well as an operating system level. If the operating system fails, all applications and services can be restarted on another server, and if just one application fails, it can be managed by MSCS



individually. An additional independent network connection is used to perform monitoring within the cluster. One or more disk subsystems are attached to both nodes. In the above example, an IBM EXP15 was selected and the IBM ServeRAID-3H Ultra2 SCSI Adapters provided the I/O control. MSCS requires a dedicated SCSI channel to act as a "SCSI heartbeat" connection. This connection, between the third channel of the ServeRAID-3H Adapter in each node, logically attaches the quorum disk which allows arbitration when a failure occurs.

Additional information on IBM Netfinity and IBM PC Server Clustering Solutions may be found on the World Wide Web by accessing URL <http://www.pc.ibm.com/us/netfinity/clustering.html>



IBM Netfinity 5500 M10 Configurator

| Part Number | Withdrawal Date (mmdyyy) ⁷ | Pentium II Xeon Processor Speed (MHz) ⁶ | SMP Enabled | L2 ECC Cache. (KB) | Memory: std./max. (MB) ⁵ | Form Factor | Hard Disk Drive: std. size, speed (RPM) | Internal Max. Hard Drive Capacity (GB) | Wide Ultra SCSI Controller | CD-ROM (IDE) | 32 bit PCI Slots (Total/Avail) | 16 bit ISA Slots | Advanced System Management Processor | Hot-Swap Components | Redundancy | Bays: (total, avail) | Ethernet (Mbps) |
|----------------------|---------------------------------------|--|-------------|--------------------|-------------------------------------|--------------------|---|--|----------------------------|----------------------|--------------------------------|------------------|--------------------------------------|---|-------------------------------------|----------------------|-----------------|
| 86611RY ¹ | 02/16/99 | 400 | 2-way | 512 | 128/2048 | Rack(8U) | - | 109 | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 86611Y | 02/16/99 | 400 | 2-way | 512 | 128/2048 | Tower ³ | - | 109, (473) ⁴ | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 86612RY ¹ | 02/16/99 | 400 | 2-way | 1024 | 128/2048 | Rack(8U) | - | 109 | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 866131Y | - | 450 | 2-way | 512 | 128/2048 | Tower ³ | - | 109, (473) ⁴ | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 86613RY ¹ | - | 450 | 2-way | 512 | 128/2048 | Rack(8U) | - | 109 | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |
| 86614RY ¹ | - | 450 | 2-way | 1024 | 128/2048 | Rack(8U) | - | 109 | Dual Channel RAID | 32X-14X ² | 6/6 | 1 | Y | 6 x HDD Bays 4 x PCI Slots Power & Fans | Fans, Power(Opt.), LAN (Opt.) | 10, 8 | 10/100 |

1. Housed in a 19" Rack mountable drawer and ships standard without a keyboard or mouse. Requires IBM Netfinity Rack (9306900), Netfinity NetBAY22 (9306200), or industry standard 19" Rack, EIA-310D, with a minimum depth of 28 inches (711.2 mm) and rack rail to front door clearance of 3 inches (75.4 mm).
2. Variable read rate. Actual playback speed will vary and is often less than the maximum possible.
3. Tower models come equipped with a single NetBAY3, 3U stackable enclosure. Up to a maximum of three are supported.
4. With a single Netfinity EXP15 installed in the standard NetBAY3.
5. All memory is 100 MHz ECC SDRAM.
6. Intel Pentium II Xeon® processors perform external operations to memory and the I/O bus subsystems at 100MHz.
7. Not available from IBM after this date. Business Partner inventory may be available.

Processor Upgrades

| Pentium II Xeon Processors with 512KB or 1MB Cache | Part Number | SMP Support ¹ | Processor Speed/Cache Upgrade ² |
|--|-------------|--------------------------|--|
| Netfinity 5500 400MHz/512KB Upgrade | 01K7264 | All 1xY | - |
| Netfinity 5500 400MHz/1MB Upgrade | 10L5894 | All 2xY | All 1xY |
| Netfinity 5500 450MHz/ 512KB Upgrade | 10L5901 | All 3xY | All 1xY, 2xY |
| Netfinity 5500 450MHz/ 1MB Upgrade | 10L5902 | All 4xY | All 1xY, 2xY, 3xY |

1. One additional processor may be installed, providing a maximum of two.
2. Requires removal of the standard processor. A maximum of two processors may be installed. Upgrades may require a BIOS update. To obtain the latest flash BIOS, access URL <http://www.ibm.com/pc/support> then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

Memory Configurator

| |
|-------------------|
| RDIMM Slot 1 - J4 |
| RDIMM Slot 2 - J3 |
| RDIMM Slot 3 - J2 |
| RDIMM Slot 4 - J1 |

| |
|----------------|
| Standard RDIMM |
|----------------|


| Total Memory | Part Number(s) Required |
|--------------|--------------------------|
| 128MB | Standard on all Models |
| 256MB | 1 x 01K7262 |
| 384MB | 1 x 01K8043 |
| 640MB | 1 x 01K7263 |
| 896MB | 1 x 01K8043, 1 x 01K7263 |
| 1152MB | 2 x 01K7263 |
| 1664MB | 3 x 01K7263 |
| 2048MB (max) | 4 x 01K7263 ¹ |

| Memory Description | Part Number |
|--|-------------|
| Netfinity 128MB SDRAM ECC RDIMM ¹ | 01K7262 |
| Netfinity 256MB SDRAM ECC RDIMM ¹ | 01K8043 |
| Netfinity 512MB SDRAM ECC RDIMM ¹ | 01K7263 |

1. RDIMMs must be installed in sequence beginning with Slot 4 (J1) and ordered from largest to smallest.

This table does not represent all possible memory configurations.
1. Replace standard RDIMM.

Hard Disk Configurator



| Total Internal Disk Storage ¹ | Part Number(s) Required (7200 RPM) | | | | Part Number(s) Required (10,000 RPM) | | |
|--|------------------------------------|----------------|----------------|-------------|--------------------------------------|----------------|-------------|
| | 4.5GB | 9.1GB | 18.2GB | 36.4GB | 4.5GB | 9.1GB | 18.2GB |
| 0GB | Standard on Base Models | | | | Standard on Base Models | | |
| 4.5GB | 1 x 94G7429 | - | - | - | 1 x 01K8009 | - | - |
| 9.1GB | 2 x 94G7429 or | 1 x 01K8053 | - | - | 2 x 01K8009 or | 1 x 01K8054 | - |
| 13.5GB | 3 x 94G7429 | - | - | - | 3 x 01K8009 | - | - |
| 18.2GB | 4 x 94G7429 or | 2 x 01K8053 or | 1 x 01K8055 | - | 4 x 01K8009 or | 2 x 01K8054 or | 1 x 01K8503 |
| 22.5GB | 5 x 94G7429 | - | - | - | 5 x 01K8009 | - | - |
| 27.2GB | 6 x 94G7429 or | 3 x 01K8053 | - | - | 6 x 01K8009 or | 3 x 01K8054 | - |
| 36.4GB | - | 4 x 01K8053 or | 2 x 01K8055 or | 1 X 02K0441 | - | 4 x 01K8054 or | 2 x 01K8503 |
| 45.5GB | - | 5 x 01K8053 | - | - | - | 5 x 01K8054 | - |
| 54.6GB | - | 6 x 01K8053 or | 3 x 01K8055 | - | - | 6 x 01K8054 or | 3 x 01K8503 |
| 72.8GB | - | - | 4 X 02K0440 or | 2 X 02K0441 | - | - | - |
| 91Gb | - | - | 5 X 02K0440 | - | - | - | - |
| 109GB(max) | - | - | 6 X 02K0440 or | 3 X 02K0441 | - | - | - |

This table does not represent all possible hard drive configurations.

1. Total internal storage listed is within ± 0.2GB unless otherwise noted.

| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max. Qty. |
|----------------------|-------------|-----------------|--------------|------------|-------------|---|--------|--------|------------------|-----------|
| RM 1 | 3.5" | SL | Yes | Diskette | 94G7429 | 4.51GB Wide Ultra SCSI Hot-swap HDD | 7200 | SL | HS 1..6 | 6 |
| RM 2 | 5.25" | HH | Yes | IDE CD-ROM | 01K8053 | IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 7200 | SL | HS 1..6 | 6 |
| RM 3 | 5.25" | HH ¹ | Yes | Open | 01K8055 | IBM Netfinity 18.2GB Wide Ultra SCSI SCA-2 HDD ¹ | 7200 | HH | HS 1/2, 3/4, 5/6 | 3 |
| RM 4 | 5.25" | HH ¹ | Yes | Open | 02K0440 | IBM Netfinity 18.2GB Wide Ultra SCSI Hot-Swap SL HDD | 7200 | SL | HS 1..6 | 6 |
| HS 1..6 | HS | SL ² | Yes | Open | 02K0441 | IBM Netfinity 36.4GB Wide Ultra SCSI Hot-Swap HDD | 7200 | HH | HS 1/2, 3/4, 5/6 | 3 |
| NetBAY3 ³ | 19" Rack | 3U | Yes | Open | 01K8009 | IBM Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | 10,000 | SL | HS 1..6 | 6 |
| | | | | | 01K8054 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 10,000 | SL | HS 1..6 | 6 |
| | | | | | 01K8503 | IBM Netfinity 18.2GB 10K Wide Ultra SCSI SCA-2 HDD ¹ | 10,000 | HH | HS 1/2, 3/4, 5/6 | 3 |

1. Two half-high (HH) bays can be combined to support a single full-high device.
2. Two slim-line (SL) bays can be combined to support a single half-high device.
3. One NetBAY3 is included with tower models and a total of three are supported. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices.

1. Two slim-line (SL) bays can be combined to support a single half-high device.



Internal SCSI Cabling

Netfinity 5500 and 5500 M10 systems contain a backplane supporting six hot-swap drive bays. The backplane is connected to one of the two connectors of the integrated dual-channel ServeRAID controller through a 16-bit SCSI cable. A two-drop 16-bit SCSI cable, with an integrated terminator, is included with the server to support up to two internal removable media devices connected to the second RAID connector or a supported SCSI adapter. Optional Netfinity SCSI Controller Cable (P/N 03K9313) is a 16-bit cable that can be attached to the second RAID connector and routed to the rear panel cutout providing an external 16-bit VHDCI 0.8mm connector. If internal removable devices are required in addition to external RAID device attachment, a supported SCSI adapter must be installed using the standard two-drop SCSI cable for device/adapter connection. If connecting narrow devices to this cable, additional 68-pin to 50-pin converters (P/N 32G3925) must be ordered. Some narrow devices include a converter in their ship group.

Typical Options

| Part Number | Ethernet ¹ | Hot-Plug ⁴ | Failover Support ⁶ | Adapter Length | Slots Supported ⁵ |
|------------------------|---|-----------------------|-------------------------------|----------------|------------------------------|
| 08L3341 | IBM Netfinity 10/100 Fault Tolerant Adapter ^{1, 2} | X | X ² | Half | 1..6 |
| 34L0901 | IBM Netfinity 10/100 Ethernet Adapter ¹ | X | X | Half | 1..6 ⁷ |
| 34L0301 | IBM Netfinity Gigabit Ethernet SX Adapter ¹ | X | X | Half | 1..6 |
| Token Ring | | | | | |
| 34L0501 | Token-Ring 100/16/4 High-Speed PCI Adapter | - | X | Half | 1..6 |
| 34L0601 | Token-Ring 16/4 PCI Adapter 2 | - | X | Half | 1..6 |
| UPS³ | | | | | |
| 94G3136 | APC Smart-UPS 1400 (26 min. runtime at 375 VA) | | | | |
| 94G4075 | APC Smart-UPS 1400 (26 min. runtime at 375 VA) | | | | |
| 94G6674 | APC Smart-UPS 1400RMB (21min. runtime at 375 VA) | | | | |
| 94G6675 | APC Smart-UPS 1400RMB (21min. runtime at 375 VA) | | | | |
| 94G6676 | APC Smart-UPS 3000RMB (55 min. runtime at 375 VA) | | | | |
| 94G6677 | APC Smart-UPS 3000RMB (55 min. runtime at 375 VA) | | | | |

Adapter Slots

| |
|--------------------------------|
| ISA - Full Length |
| 1 Hot Plug PCI Full Length |
| 2 Hot Plug PCI Full Length |
| 3 Hot Plug PCI Full Length |
| 4 Hot Plug PCI Full Length |
| 5 PCI Full Length(Primary Bus) |
| 6 PCI Full Length(Primary Bus) |

1. Netfinity 5500 and 5500 Mxx has an integrated 10/100 PCI Ethernet controller which also supports failover from an IBM Netfinity 10/100 Fault Tolerant Adapter (P/N 08L3341).
2. Supports failover to onboard 10/100 controller. Up to four fault tolerant controllers are supported (including onboard 10/100). Failover limitations vary based on operating environment. For more information access URL <http://www.ibm.com/pc/us/compat>
3. Stated runtimes and power are for typical configurations (approximately 70% of maximum capacity). For additional information see Appendix C: UPS Runtime Estimate.
4. Hot Plug capable. For Network Operating System support access URL <http://www.ibm.com/pc/us/compat>
5. PCI Slots 1, 2, 3 and 4 support Hot Plug devices.
6. These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>.
7. A maximum of four 34L0901 adapters are supported.

| Part Number | Description | Bays Supported | SCSI Interface (bit) | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Encl. ¹ |
|--|--|---------------------|----------------------|---------------------|----------------------|---------------------------|-----------------------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | RM 3, 4 | 8 | 3.5" HH or 5.25" HH | Y ⁶ | Y | 3510020 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | RM 3, 4 | 16 | 5.25" HH | N ⁷ | - | 3510020 ² |
| 01K1320 | IBM 20/40GB DLT SCSI Tape Drive | RM 3/4 ⁸ | 8 | 5.25" FH | Y ⁷ | Y | 3503BOX ² , 3551001 |
| 04K0149 | IBM 35/70GB DLT SCSI Tape Drive | RM 3/4 ⁸ | 16 | 5.25" FH | N ⁷ | - | 3503BOX ² , 3551001 |
| Associated Options | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | External | - | - | 3510020, 3503BOX |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ³ | - | 8/16 | Desktop | | | |
| 3551001 | IBM NetMEDIA Storage Expansion Unit EL ⁴ | - | 16 | Rack | | | |
| 3503BOX | IBM DLT External SCSI Enclosure ⁵ | - | 16 | Desktop | | | |
| External Tape Libraries⁹ | | | | | | | |
| 3447xxx | 3447 Digital Linear Library (desktop-105, rack-106) | - | 16 | Desktop or Rack | | | |
| 3449xxx | 3449 8mm Tape Library (deskside-355, rack-356) | - | Diff. | Deskside or Rack | | | |
| 3570xxx | Magstar MP 3570 Tape Subsystem (models B2x and C2x) | - | Diff. | Rack | | | |

1. To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section, and the desired enclosure and then refer to Appendix D: Cables-Storage Units-Controllers.
 2. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 3. Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Terminator (P/N 32G3918).
 4. Provides a black 3U, 19" rack or NetBAY3 mountable tape enclosure. Provides two full high (FH) or four half high (HH) extended length 5.25" bays. External connector is 0.8mm VHDCI.
 5. Provides a black desktop DLT tape enclosure. External connector is 68-pin high density. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918)
 6. Tape drive is capable of self termination.
 7. Termination is provided by the system unit's standard SCSI cabling.
 8. Two Half-High (HH) bays can be combined to support a single Full-High (FH) device..
 9. Tape library attributes and prerequisites are located in Appendix B: Tape Library Attributes.
- NOTE: SCSI support for tape drives is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. Additional tape attributes can be found in Appendix A: Tape Drive Attributes.

Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

| Part Number | Monitors |
|-------------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 65474AX | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black |

Other Selected Options

For a complete list of all IBM and non-IBM option compatibility with network operating systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.pc.ibm.com/ap/serverproven/index.html>

| Part Number | Other Options |
|-------------|---|
| | Power |
| 01K7951 | IBM Netfinity 400 W Hot-Swap Redundant Power Supply II ¹ |
| | Cables |
| 03K9313 | IBM Netfinity SCSI Controller Cable (0.8mm) ² |
| 32G3925 | SCSI 68-pin to 50-pin Converter |
| | Rack and NetBAY3 Related |
| 01K8021 | IBM Netfinity 5500 Rack-to-Tower Kit ³ |
| 01K8020 | IBM Netfinity 5500 Tower-to-Rack Kit |
| 9306900 | IBM Netfinity Rack ⁴ |
| 9306200 | IBM Netfinity NetBAY22 ⁴ |
| 10L6912 | IBM Netfinity NetBAY3 ⁵ |
| 10L6913 | IBM Netfinity Caster Set |
| | Keyboard and Mouse⁶ |
| 28L3640 | Space Saver Keyboard |
| 84G6537 | TrackPoint Caps |
| 01K1260 | TrackPoint IV 104-key Black Keyboard |
| 76H0109 | IBM 104-Key Keyboard |
| 12J3615 | Black Sleek Mouse |

- Includes a power cord which requires an additional power source.
- Used for routing the second internal SCSI RAID channel to an ext. 0.8mm connector. Can be used with IBM .8mm to 68-pin SCSI adapter (P/N 01K8017) to provide an ext. 68-pin high density connector.
- Includes one Netfinity NetBAY3.
- See IBM Netfinity Rack Cabinet and Options section for supported devices.
- One NetBAY3 is included with tower models and a total of three are supported. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices.
- Tower models include both a mouse and a keyboard.

| Part Number | Description | Hot-Plug ¹ | Failover Support ¹¹ | PCI Bus Support | Adapter Length | Slots Supported ² |
|-----------------------|---|-----------------------|--------------------------------|-----------------|----------------|------------------------------|
| | Storage Controllers | | | | | |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter | - | - | 32-bit | Half | 1..6 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ³ | X | X | 64/32-bit | Full | 1..6 |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB/Battery-Backup Cache ⁴ | - | - | - | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁵ | X | X | 32-bit | Full | 1..6 |
| 01K7297 | Netfinity Fibre Channel PCI Adapter ⁶ | - | - | 64/32-bit | Half | 1..6 |
| 32H3811 | IBM SSA RAID Adapter for PC Servers ⁷ | - | - | 32-bit | Full | 1..4 |
| | Modem⁸ | | | | | |
| 01K1216 | ISA 56K/33.6 Kbps Plug and Play Data/Fax Modem ⁹ | - | - | - | Half ISA | ISA |
| 7852400 | External V34 Data/FAX Modem | - | - | - | - | - |
| | External Storage Expansion Units¹⁰ | | | | | |
| 35202RU | IBM Netfinity EXP15 | - | - | - | - | - |
| 3527001 ¹² | SSA Entry Storage Subsystem for PC Servers | - | - | - | - | - |

- Hot-Plug capable. For Network Operating System support access URL <http://www.ibm.com/pc/us/compat>
- PCI Slots 1, 2, 3 and 4 support Hot-Plug devices.
- Netfinity 5500 and 5500 Mxx have two integrated ServeRAID II channels. Netfinity ServeRAID-3H Ultra2 SCSI Adapter (P/N 01K7207) provides one internal and 2 external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of 3 external LVDS SCSI channels.
- Installs on ServeRAID-3H P/N 01K7207 to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
- Netfinity 5500 and 5500 Mxx have two integrated ServeRAID II channels. Netfinity ServeRAID-3L Ultra2 SCSI Adapter (01K7364) provides either one internal or one external LVDS SCSI channel.
- See Netfinity Fibre Channel Solutions section for additional configuration information.
- System units with greater than 2GB of system memory are restricted to RAID 5 operation only.
- Due to homologation variances, modem availability may differ by country.
- x2 modems are designed to be capable of receiving data up to 56Kbps from an x2 compatible service provider, and transmitting data at up to 33.6Kbps. Public Networks currently limit maximum download speeds to about 53Kbps. Actual speeds depend on many factors and are often less than the maximum possible.
- External Storage Expansion Units require storage controllers and external cables. For specific configuration requirements, see Appendix D: Cables-Storage Units-Controllers section.
- These adapters support operation failover, without interruption, to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
- A preconfigured 3527001 (3527-PRO) contains five 9.1GB HDDs (P/N 21H8734) and a 5 M cable pair (P/N 59H7222). Order P/N 34H8388.



Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

High Availability

| Description | Quantity | Part Number | Usage |
|--|----------|-----------------|-------------------------------|
| IBM Netfinity 5500 M10 (Pentium II 450/128MB/0GB, Tower & NetBAY3) | 1 | 8661-31Y | - |
| 4.51GB Wide Ultra SCSI hot-swap HDD | 2 | 94G7429 | NOS on mirrored HDD's |
| IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 4 | 01K8053 | RAID 5 with Hot-Spare |
| IBM 20/40GB DLT SCSI Tape Drive | 1 | 01K1320 | - |
| IBM Netfinity 10/100 Fault Tolerant Adapter | 1 | 08L3341 | Failover to Integrated Ether. |
| External V.34 Data/Fax Modem | 1 | 7852400 | Remote Management |
| IBM Netfinity 400 W Hot-Swap Redundant Power Supply II | 1 | 01K7951 | - |
| IBM Netfinity NetBAY3 | 1 | 10L6912 | Enclosure for second UPS |
| APC Smart-UPS 1400 RMB | 2 | 94G6674/94G6675 | Redundant UPS |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |


This tower server is configured to act as the foundation for business critical applications, applications your business cannot afford to be without. Configured with enough disk drives to mirror the operating system and provide a standard RAID 5 environment for data, optional hot-swap redundant power, redundant UPS's for power even during a blackout or in the event of a UPS or power cord failure, and an Ethernet adapter that can failover to the onboard Ethernet controller this server represents the leading edge in high availability. An internal tape drive is included to back-up that all important asset..... data, and a modem is included to allow out-of-band (non-LAN) system management utilizing the Netfinity Advanced System Management Processor.

WEB Server

| Description | Quantity | Part Number | Usage |
|--|----------|-----------------|-----------------------------|
| IBM Netfinity 5500 M10 (Pentium II 450/128MB/0GB, Tower & NetBAY3) | 1 | 8661-31Y | - |
| Netfinity 512MB SDRAM ECC RDIMM | 1 | 01K7263 | Total Memory: 640MB |
| IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 6 | 01K8054 | RAID 5 Data Storage |
| High Speed ISDN connection ¹ | 1 | footnote 1 | Connection to WEB |
| IBM 20/40GB DLT SCSI Tape Drive | 1 | 01K1320 | - |
| PCI Fast/Wide Ultra SCSI Adapter | 1 | 02K3454 | Tape Controller |
| IBM Netfinity SCSI Controller Cable | 1 | 03K9313 | Provides external RAID |
| IBM Netfinity NetBAY3 | 1 | 10L6912 | Enclosure for EXP15 |
| IBM Netfinity EXP15 | 1 | 35202RU | Provides additional 10 Bays |
| IBM Netfinity EXP10 9.1GB 10K Wide Ultra SCSI SL SCA-2 HDD | 5 | 01K8499 | RAID 5 Data Storage |
| Netfinity 2 M Ultra2 SCSI Cable | 1 | 03K9310 | Attaches EXP15 to 03K9313 |
| IBM Netfinity 400 W Hot-Swap Redundant Power Supply II | 1 | 01K7951 | - |
| APC Smart-UPS 3000 RMB | 2 | 94G6676/94G6677 | Redundant UPS's |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |

¹. Select from ServerProven options found on the WEB at URL <http://www.ibm.com/pc/us/compat>. Warranty and service for third party ServerProven products is provided for by the manufacturer, not IBM.

This tower model is configured as the perfect WEB presence for a company ready for eBusiness. With enough disk storage to host a large sales catalog, an optional hot-swap power supply and UPS so that your server is ready when your customers are ready to order, and an ISDN adapter to allow for a speedy connection into the WEB infrastructure, on top of all the integrated high-availability features make this the ideal server for electronic commerce

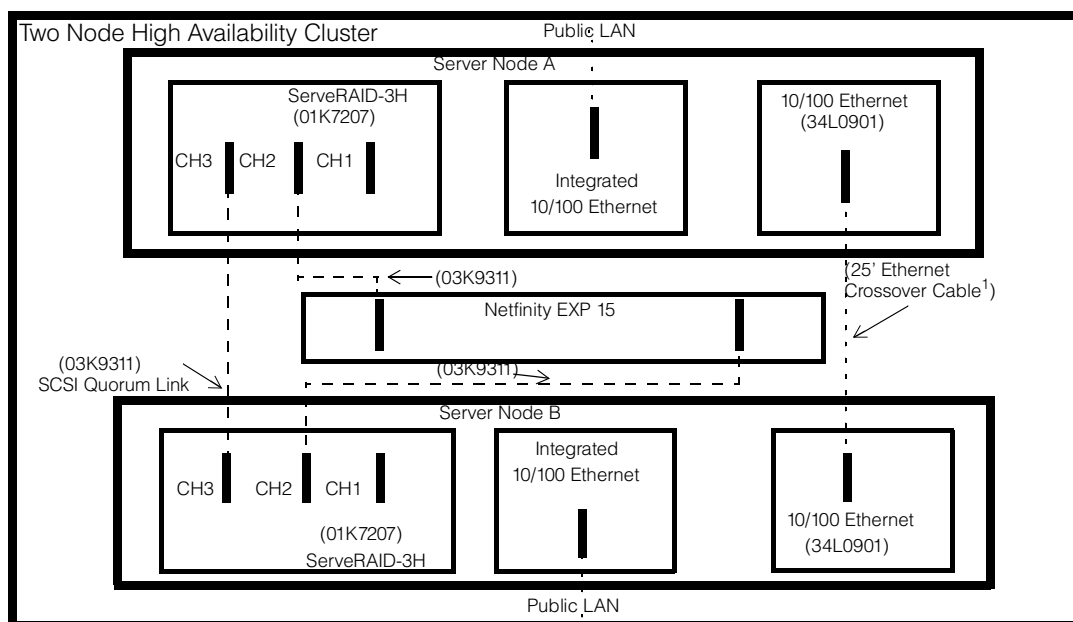

1. Customer supplied Ethernet Crossover Cable may vary in length up to a maximum of 25' (7.6 m).

Two Node High Availability Cluster¹

| Description | Qty. | Part Number | Usage |
|---|------|-----------------|----------------------------|
| Server Nodes A & B | | | |
| IBM Netfinity 5500 M10 (Pentium II Xeon 450/1MB Cache/128MB/0GB, Rack) (8U) | 2 | 8661-4RY | - |
| IBM Netfinity 5500 450MHz/1MB Upgrade | 2 | 10L5902 | Dual SMP Processing |
| Netfinity 128 MB SDRAM ECC RDIMM | 2 | 01K7262 | Total Memory: 256MB (each) |
| 4.51GB Wide Ultra SCSI Hot-Swap HDD | 4 | 94G7429 | NOS on mirrored HDD's |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ³ | 2 | 01K7207 | Two channels for EXP15's |
| IBM 10/100 Ethernet PCI Adapter ² | 2 | 34L0901 | Private Interconnect |
| IBM 35/70GB DLT SCSI Tape Drive | 1 | 04K0149 | - |
| PCI Fast/Wide Ultra SCSI Adapter | 1 | 02K3454 | Tape Drive Controller |
| External V.34 Data/Fax Modem | 2 | 7852400 | Remote Management |
| IBM Netfinity 400 W Hot-Swap Redundant Power Supply II | 2 | 01K7951 | - |
| APC Smart-UPS 3000 RMB (3U) | 2 | 94G6676/94G6677 | - |
| Storage Expansion Unit | | | |
| IBM Netfinity EXP15 ³ | 1 | 35202RU | - |
| IBM Netfinity EXP10 9.1GB Wide Ultra SCSI SCA-2 HDD ³ | 5 | 01K7959 | RAID 5 Shared Storage |
| Netfinity 4.2 M Ultra2 SCSI Cable ³ | 2 | 03K9311 | Attach EXP15 to Servers |
| Shared (or single occurrence) Resources | | | |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |
| Space Saver Keyboard (1U) | 1 | 28L3640 | - |
| Netfinity 4.2 M Ultra2 SCSI Cable | 1 | 03K9311 | SCSI Quorum Link |
| Industry Standard 19" Rack, EIA-310D, Min. depth of 28" | | | |
| IBM 9306-900 Netfinity Rack | 1 | 9306900 | - |
| Monitor Compartment (9U) | 1 | 94G7444 | - |
| Netfinity Rack Keyboard Tray | 1 | 28L4707 | - |
| Netfinity Console Server Selector Switch (4-port) | 1 | 28L0542 | - |
| Power Cable-Type A14 ⁴ | 3 | 94G6667 | - |
| 12ft. Console Cable Set | 2 | 94G7447 | - |
| Side Panel Kit | 1 | 94G6669 | - |
| Blank Filler Kit | 1 | 94G6670 | - |

1. Certified for Microsoft Cluster Server.

2. Requires customer supplied Ethernet Crossover Cable which may vary in length up to a maximum of 25' (7.6 m).

3. By replicating these items, up to a total quantity of four ServeRAID-3H Adapters (plus options) and eleven EXP15's can provide over 2 Terabytes of storage. Additional power and Rack space will be required.

4. Cable length requirements are dependant on component placement within the rack suite. To determine specific configuration requirements use the Netfinity Rack Configurator which is downloadable from Web site http://www.pc.ibm.com/us/netfinity/tech_library.html "Configuration Tools"

Clustering is a group of interconnected computers used as a single, unified computing resource. Clustering Netfinity servers, like the IBM Netfinity 5500 M10, provides a high availability solution to keep you in touch with the key applications you need to run your business. High availability solutions are available from IBM to support NT, OS/2, and NetWare operating environments. By using the IBM Netfinity Rack, a high availability cluster with scalable storage expansion can be installed in less floor space.



This sample configuration consists of paired IBM Netfinity 5500 M10 cluster nodes equipped with two-way SMP capability and redundant power supplies. Microsoft Cluster Server (MSCS) has been certified on IBM Netfinity 5500 M10 servers, using the IBM ServeRAID-3H with the EXP15 Storage Expansion Unit. MSCS allows two configured servers, referred to as nodes, to be connected together to form a cluster. Providing system redundancy means that a complete server can fail and client access to server resources is largely unaffected. MSCS extends this theme by also allowing software failures at an application level as well as an operating system level. If the operating system fails, all applications and services can be restarted on another server, and if just one application fails, it can be managed by MSCS individually. An additional independent network connection is used to perform monitoring within the cluster. One or more disk subsystems are attached to both nodes. In the above example, an IBM EXP15 was selected and the IBM ServeRAID-3H Ultra2 SCSI Adapters provided the I/O control. MSCS requires a dedicated SCSI channel to act as a "SCSI heartbeat" connection. This connection, between the third channel of the ServeRAID-3H Adapter in each node, logically attaches the quorum disk which allows arbitration when a failure occurs.

Additional information on IBM Netfinity and IBM PC Server Clustering Solutions may be found on the World Wide Web by accessing URL <http://www.pc.ibm.com/us/netfinity/clustering.html>.



Did you know that you can download

the latest IBM Configuration tools

including IBM ConfigXpert,

PC Paper Configurator and

IBM Rack Configurator

from the web?

AUSTRALIA: <http://www.pc.ibm.com/au/configxpert.html>
NEW ZEALAND: <http://www.pc.ibm.com/nz/configxpert.html>
SINGAPORE: <http://www.pc.ibm.com/sg/configxpert.html>
ASEAN: <http://www.pc.ibm.com/asean/configxpert.html>



IBM Netfinity 7000 Configurator

| Part Number | Processor Type/Speed (MHz)* | L2 Cache: std./max. (KB) | Memory: std./max. (MB) | Memory Type | Hard Drive: std.size.speed(RPM) | Internal Hard Drive: max. (GB) | Hard Drive Controller Type | Slots: total, available | Bays: total, available | Service Processor | Hot-Swappable bays: total avail. | Redundant Fans (PFA) | Form Factor |
|-----------------------|-----------------------------|--------------------------|------------------------|-------------|---------------------------------|--------------------------------|----------------------------|-------------------------|------------------------|-------------------|----------------------------------|----------------------|-------------|
| 8651-TM0 | Pentium Pro/200 | 512/512 | 256/4GB, 60ns | ECC | - | 109.2 | 2 x Wide Ultra SCSI | 10, 9 | 18, 16 | Std. | 12, 12 | yes | Tower |
| 8651-TH0 ³ | Pentium Pro/200 | 1024/1024 | 256/4GB, 60ns | ECC | - | 109.2 | 2 x Wide Ultra SCSI | 10, 9 | 18, 16 | Std. | 12, 12 | yes | Tower |


1. Not available from IBM after this date. Business Partner inventory may be available.
2. Housed in a 19" Rack mountable drawer and ships standard without a keyboard or mouse, requires IBM Netfinity Rack (9306900) or industry standard 19" Rack, EIA-310D, with a minimum depth of 30 inches.
3. The IBM Netfinity 7000 you selected features the Intel Pentium Pro 200MHz processor with 1MB of integrated L2 cache. The latest Intel storage specification for this processor can be found at Intel's web sites at <http://www.intel.com> or <http://developer.intel.com/design/pro/datashts>

SMP Processor Upgrades

| Pentium Pro | Part Numbers | SMP Support ² | Upgrade & SMP Support |
|--|--------------|--------------------------|-----------------------|
| PC Server 704 SMP 200MHz Upgrade (processor with 512KB L2 Cache) | 94G6678 | TM0 | - |
| Netfinity 200MHz/1MB L2 Cache Processor Upgrade ¹ | 94G7147 | TH0 | (,TM0) ^{3,4} |
| Netfinity 200MHz/1MB Processor Card | 94G7387 | - | (TM0) ⁴ |

1. The latest Intel storage specification for this processor can be found at Intel's web sites at <http://www.intel.com> or <http://developer.intel.com/design/pro/datashts>
2. Three additional processors may be installed, providing a maximum of four.
3. Requires removal of the standard processor. A maximum of four processors may be installed. Upgrades may require Netfinity 200MHz/1MB Processor Card⁴ (P/N 94G7387) and/or a BIOS update. To obtain the latest Flash BIOS, access URL <http://www.ibm.com/pc/support>, then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".
4. To determine if your IBM Netfinity 7000 requires processor card 94G7387, check the FRU label of your current processor cards. If the FRU part number is 12J3352 your server does not require this option. Both processor cards must be replaced even if only one processor (94G7147) is to be installed.

Memory Configurator

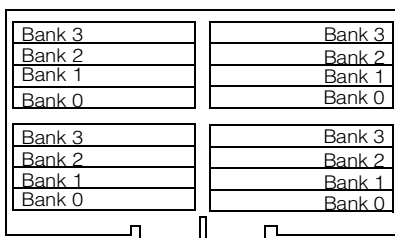

These tables do not represent all possible memory configurations.

Memory Rules

- One additional memory kit must be installed to enable automatic server restart from a memory failure
- Memory kits contain 4 DIMMs. A maximum of 16 DIMMs are supported.
- Memory kits can be installed in any combination of Kit sizes.

| Total Memory | Part Number(s) Required |
|---------------|--|
| 256MB | 4 x 64MB DIMMS Standard on Base Models |
| 512MB | 1 x 94G7384 |
| 768MB | 1 x 94G7385 |
| 2GB | 1 x 94G7384, 1 x 94G7385 and 1 x 94G7386 |
| 4096MB (max.) | 4 x 94G7386 ¹ |

| DIMM | Part Number |
|--------------------------------------|-------------|
| Netfinity 256MB Memory Expansion Kit | 94G7384 |
| 512MB Memory Expansion Kit | 94G7385 |
| 1024MB Memory Expansion Kit | 94G7386 |

1. Replace standard DIMMs.

Hard Disk Drive Configurator

| | Internal Disk Storage ¹ | Part Number(s) Required (7200RPM) | | | Part Number(s) Required (10,000RPM) | | |
|--|------------------------------------|-----------------------------------|-----------------|-------------|-------------------------------------|-----------------|-------------|
| | | 4.5GB | 9.1GB | 18.2GB | 4.5GB | 9.1GB | 18.2GB |
| | 0GB ² | Standard on Base Models | | | Standard on Base Models | | |
| | 9.1GB | 2 x 94G7429 or | 1 x 01K8053 | - | 2 x 01K8009 or | 1 x 01K8054 | - |
| | 18.2GB | 4 x 94G7429 or | 2 x 01K8053 or | 1 x 01K8055 | 4 x 01K8009 or | 2 x 01K8054 or | 1 x 01K8503 |
| | 27.2GB | 6 x 94G7429 or | 3 x 01K8053 | - | 6 x 01K8009 or | 3 x 01K8054 | - |
| | 36.2GB | 8 x 94G7429 or | 4 x 01K8053 or | 2 x 01K8055 | 8 x 01K8009 or | 4 x 01K8054 or | 2 x 01K8503 |
| | 54.6GB | (54.1GB) 12 x 94G7429 or | 6 x 01K8053 or | 3 x 01K8055 | (54.1GB) 12 x 01K8009 or | 6 x 01K8054 or | 3 x 01K8503 |
| | 72.8GB | - | 8 x 01K8053 or | 4 x 01K8055 | - | 8 x 01K8054 or | 4 x 01K8503 |
| | 91.0GB | - | 10 x 01K8053 or | 5 x 01K8055 | - | 10 x 01K8054 or | 5 x 01K8503 |
| | 109.2GB (max) | - | 12 x 01K8053 or | 6 x 01K8055 | - | 12 x 01K8054 or | 6 x 01K8503 |

This table does not represent all possible hard drive configurations.
 1. Total Internal Storage listed is within ± 0.2GB unless otherwise noted.

| Bay | Form Factor | Height | Front Access | Usage |
|-------------|-------------|-----------------|--------------|------------|
| RM 1 | 3.5" | SL | yes | diskette |
| RM 2 | 5.25" | HH | yes | IDE CD-ROM |
| RM 3..6 | 5.25" | HH ¹ | yes | open |
| Bank A 1..6 | HS | SL ² | yes | open |
| Bank B 1..6 | HS | SL ² | yes | open |

RM= Removable Media Bay
 1. Two half-high bays can be combined to support a single full high device.
 2. Two slim-line bays can be combined to support a single half-high device.

| Part Number | Description | RPM | Height | Bays Supported | Max Qty. |
|-------------|--|--------|--------|------------------------|----------|
| 94G7429 | 4.51GB Wide Ultra SCSI hot-swap Hard Disk Drive | 7200 | SL | A1...A6, B1...B6 | 12 |
| 94G7430 | 9.1GB Wide Ultra SCSI hot-swap Hard Disk Drive ¹ | 7200 | HH | A and B, 1/2, 3/4, 5/6 | 6 |
| 01K8053 | IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 7200 | SL | A1...A6, B1...B6 | 12 |
| 01K8055 | IBM Netfinity 18.2GB Wide Ultra SCSI SCA-2 HDD ¹ | 7200 | HH | A and B, 1/2, 3/4, 5/6 | 6 |
| 01K8009 | IBM Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | 10,000 | SL | A1...A6, B1...B6 | 12 |
| 01K8054 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 10,000 | SL | A1...A6, B1...B6 | 12 |
| 01K8010 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 HDD ¹ | 10,000 | HH | A and B, 1/2, 3/4, 5/6 | 6 |
| 01K8503 | IBM Netfinity 18.2GB 10K Wide Ultra SCA-2 HDD ¹ | 10,000 | HH | A and B, 1/2, 3/4, 5/6 | 6 |
| 94G7426 | IBM Netfinity Backplane Repeater Kit ² | - | - | - | 1 |

1. Two slim-line bays can be combined to support a single half-high device.
 2. Used to connect two Netfinity 7000 hot-swap backplanes together for support of up to 12 disk drives from one integrated or ServeRAID II SCSI channel.

Internal SCSI Cabling

Netfinity 7000 systems are cabled internally with a 16-bit cable running from each of the two 7880 Wide Ultra SCSI PCI controllers to each of the two hot-swap backplanes. A four-drop, terminated, 16-bit SCSI cable is included with all Netfinity 7000 models to support installation of SCSI devices into the four removable media bays. If only one of the hot-swap backplanes is going to be used, the four-drop cable can be attached to the 7880 controller that is not attached to a backplane. If external device support is required for the second controller, optional 16-bit Netfinity PCI SCSI Controller to Bulkhead Cable (P/N 94G7421) can be used to route the connector to the rear panel cutout providing an external 16-bit 68-pin high density connector. Netfinity Backplane Repeater Kit (P/N 94G7426) can be used to connect both hot-swap backplanes to a single controller thereby freeing up the second controller for use as described above and maintaining the ability to utilize all 12 hot-swap bays.

Typical Options

| | |
|--------------------------------------|---|
| PCI - Full Length | 1 |
| PCI - Full Length | 2 |
| PCI - Full Length | 3 |
| PCI - Full Length | 4 |
| PCI - Full Length | 5 |
| PCI - Full Length | 6 |
| EISA - Full Length | 1 |
| EISA - Full Length | 2 |
| EISA - Full Length | 3 |
| Service Processor EISA - Full Length | 4 |

| Ethernet | Part Numbers |
|--|--------------------|
| 10/100 EtherJet PCI Adapter | 08L2549 |
| IBM 100/10 EtherJet PCI Adapter | 86H2432 |
| Token Ring | |
| IBM PCI Token-Ring Adapter | 41H8900 |
| High Availability ¹ | |
| IBM Netfinity 400W Hot-Swap Redundant Power Supply II ⁷ | 01K7951 |
| Netfinity 7000 M10 Dual Cord Power Unit ⁸ | 01K7952 |
| Netfinity 400W hot-swap Redundant Power Option | 94G7150 or 01K8026 |
| Storage Controllers | |
| PCI Fast/Wide Ultra SCSI Adapter | 02K3454 |
| IBM PC Server Wide Ultra SCSI PCI Adapter | 76H5407 or 76H3579 |
| IBM SSA RAID Adapter | 32H3811 |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ² | 01K7207 |
| 32MB/Battery-Backup Cache ³ | 28L1003 |
| IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁴ | 01K7364 |
| IBM ServeRAID II PCI Adapter | 76H3584 |
| IBM ServeRAID II 8MB/Battery-Backup Cache | 76H5401 |
| IBM Third Channel Cable ⁶ | 76H5400 |

1. See "Netfinity 7000 Power Supply Redundancy Requirements".
2. Provides one internal and two external LVDS SCSI channels. The internal channel can be configured for external usage.
3. Installs on ServeRAID adapter to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance. 32MB (P/N 28L1003) installs on either ServeRAID-3H (P/N 01K7207) or ServeRAID II (P/N 76H3584). 8MB (P/N 76H5401) installs on ServeRAID II (P/N 76H3584).
4. Provides one LVDS channel which is configurable for either internal or external usage.
5. Provides two internal channels and one external. One internal channel is configured for external usage while the other is for internal usage. All three channels can be configured for external usage by installing Third Channel Cable (P/N 76H5400).
6. Provides the hardware for routing the third SCSI channel of the ServeRAID Adapter external to the adapter.
7. Replacement for 01K8026 and 76H5407. Contains the same power supply as 01K8026 along with additional handles for support of Netfinity 5500, 5500 M10, 7000 and 7000 M10.
8. Provides power cord redundancy for the Netfinity 7000.

| UPS ¹ | Part Number | Monitors | Part Number |
|---|---------------------|---|-------------|
| APC Smart-UPS 1400RMB (Rack) (19 min. runtime at 490VA) | 94G6675/ 94G6676 | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white | 654000X |
| APC Smart-UPS 3000RMB (Rack) (60 min. runtime at 490VA) | 94G6676/ 94G6677 | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white | 654102X |
| APC Smart-UPS 1400 (22 min. runtime at 490VA) | 94G3136/ 94G4075 | G52 Color Monitor 15" (13.6" Viewable Image Size), stealth black | 654640X |
| Keyboard and Mouse | | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 65464AX |
| TrackPoint II Keyboard, Black | 13H6705 | G72 Color Monitor 17" (15.7" Viewable Image Size), stealth black | 654740X |
| 104-Key Keyboard, Black | 76H0109 | G74 Color Monitor 17" (15.9" Viewable Image Size), stealth black | 65474AX |
| Enhanced Mouse II- Pearl White | 13H6690 | Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere) | |

1. Stated runtimes and power are for typical configurations (70% of maximum capacity)

Other Selected Options

Note: For a complete list of all IBM and non-IBM option compatibility with network operating systems and IBM PC Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.pc.ibm.com/ap/serverproven/index.html>

| Conversion Kits | Part Number |
|---|-------------|
| Tower to Rack Conversion Kit | 94G7424 |
| Rack to Tower Conversion Kit | 94G7425 |
| Security | |
| IBM Netfinity Security Cover III | 94G7427 |
| Rack Enclosures | |
| IBM Netfinity NetBAY3 ³ | 10L6912 |
| IBM Netfinity Rack | 9306900 |
| IBM Netfinity NetBAY22 | 9306200 |
| External Storage Expansion Units ² | |
| IBM PC Server Enterprise Expansion Enclosure | 3518001 |
| PC Server 3519 Rack Storage Expansion Unit | 3519R01 |
| IBM Netfinity EXP10 Storage Expansion Unit | 35201RU |
| IBM SSA Entry Storage Subsystem for PC Servers ¹ | 3527001 |

1. Requires SSA adapter 32H3811.
2. External Storage Expansion Units require storage controllers and External Cables. For specific configuration requirements, see the Cables-Storage Units-Controllers section.
3. A single Netfinity 7000 tower model can be mounted on top of up to three Netfinity NetBAY3 (3U) stackable expansion enclosures. For a list of Netfinity NetBAY3 supported storage expansion units, power, networking and console options, see "Netfinity NetBAY3 Stackable Enclosure" section.

| Part Number | Tape Description (See footnotes for external installation) | Interface | Form Factor | Bays Supported |
|-------------|--|-------------------|--------------------------|------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive ^{1,2,3} | 8-bit SCSI | 3.5" HH or 5.25" HH | Rm 3, 4, 5, 6 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive, black ^{3,4,5} | 16-bit SCSI | 5.25" HH | Rm 3, 4, 5, 6 |
| 01K1320 | IBM 20/40GB DLT SCSI Tape Drive, black ^{6,7} | 8-bit SCSI | 5.25" FH | Rm 3/4, 4/5, 5/6 |
| 04K0149 | IBM 35/70GB DLT SCSI Tape Drive, black ^{5,7} | 16-bit SCSI | 5.25" FH | Rm 3/4, 4/5, 5/6 |
| 01K1174 | IBM 35/70GB External Digital Linear Tape Drive, white ^{7,8} | 16-bit SCSI | External | - |
| 3447xxx | 3447 Digital Linear Library (desktop-105, rack-106) ⁹ | 16-bit SCSI | Desktop or Rack | - |
| 3449xxx | 3449 8mm Tape Library (deskside-355, rack-356) ⁹ | Diff. SCSI | Deskside or Rack | - |
| 3510020 | External Half High SCSI Storage Enclosure ,black | 8 or 16 bit SCSI | Desktop | - |
| 94G7421 | Netfinity PCI SCSI Controller to Bulkhead Cable | 16-bit SCSI | Int. to Ext. | - |
| 70G9858 | PC Server F/W to Fast External SCSI Cable | 16 to 8 bit | External | - |
| 70G9857 | PC Server F/W to F/W External SCSI Cable | 16 to 16 bit SCSI | External | - |
| 32G3918 | SCSI-2 16-bit Active Terminator | 16-bit SCSI | External | - |
| 01K8017 | 0.8mm to 68-pin SCSI Adapter | 16-bit SCSI | 0.8mm to 68-pin External | - |

- Internal installation utilizes the 4 drop cable which ships standard with Netfinity 7000. Ships with SCSI 68-pin to 50-pin Converter, mounting hardware for either a 3.5" HH or 5.25" HH bay, four bezels (3.5" and 5.25" white & black). Self termination capable.
- External installation requires: PC Server F/W to Fast External SCSI Cable (P/N 70G9858) (if attaching to the onboard SCSI controller, Netfinity PCI SCSI Controller to Bulkhead Cable, P/N 94G7421 is also required) or IBM 1m External 0.8mm SCSI Cable (P/N 76H3589) (if attaching to IBM ServeRAID II Ultra SCSI Adapter (P/N 76H3584), self termination should be enabled (Daisy chaining not supported), and External Half High SCSI Storage Enclosure 3510020.
- Supported by IBM ServeRAID II Ultra SCSI Adapter (P/N 76H3584) utilizing a dedicated channel (No RAID option support), onboard SCSI controller or Wide Ultra SCSI Adapters (P/N 02K3454, 76H3579, 76H5407). Not supported when daisy chained from a hot-swap backplane.
- External installation requires: PC Server F/W to F/W External SCSI Cable (P/N 70G9857) (if attaching to the onboard SCSI controller Netfinity PCI SCSI Controller to Bulkhead Cable (P/N 94G7421 is also required) or IBM 1m External 0.8mm SCSI Cable (P/N 76H3589) (if attaching to IBM ServeRAID II Ultra SCSI Adapter (P/N 76H3584)), SCSI-2 16-bit Active Terminator (P/N 32G3918) (Daisy chaining not supported), and External Half High SCSI Storage Enclosure 3510020.
- Internal installation utilizes the 4 drop cable which ships standard with Netfinity 7000 systems.
- Ships with SCSI 68-pin to 50-pin Converter, Terminator, and SCSI cable.
- Supported by one of the onboard SCSI controllers or Wide Ultra SCSI Adapters (P/N 02K3454, 76H3579, 76H5407). Not supported when daisy chained from a hot-swap backplane.
- Includes terminator and SCSI cable (68-pin connector). If attaching to the onboard SCSI controller, Netfinity PCI SCSI Controller to Bulkhead Cable, P/N 94G7421 is required).
- Refer to Tape Library section for associated options, required SCSI controllers, and applicable footnotes.

| Netfinity 7000 Power Supply Redundancy Requirements | | | | | | | |
|--|-----|--------|-----|-------------------------------|-----|----------------------------|-------------------------|
| Processor Quantity | | Memory | | Hard Disk Drives ¹ | | Occupied PCI or EISA Slots | Power Supply Redundancy |
| Power supply redundancy provided by standard power supplies | | | | | | | |
| 1 | and | ≤ 2GB | and | ≤ 5 HH | and | ≤ 5 | Standard |
| 1 | and | ≤ 2GB | and | ≤ 9 SL | and | ≤ 5 | Standard |
| 2 | and | ≤ 2GB | and | ≤ 3 HH | and | ≤ 5 | Standard |
| 2 | and | ≤ 2GB | and | ≤ 6 SL | and | ≤ 5 | Standard |
| Additional power supply (P/N 01K7951) required for power supply redundancy | | | | | | | |
| >2 | or | > 2GB | or | > 5 HH | or | > 5 | Optional ² |
| >2 | or | > 2GB | or | > 9 SL | or | > 5 | Optional ² |

- Optional removable media devices count as either 1 HH or 1 SL hard disk drive.
- Optional Netfinity 400W hot-swap Redundant Power Supply II (P/N 01K7951) is required for preservation of power supply redundancy in robust configurations.



Sample Configurations

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

DB/2 Server

| Part Number | Amount Required | Description |
|------------------|-----------------|---|
| 8651TMO | 1 | IBM Netfinity 7000 (Pentium Pro200MHz/512KB/256MB/0GB/CD/Advanced Systems Management) |
| 94G6678 | 3 | PC Server 704 200MHz Upgrade |
| 94G7386 | 2 | 1024MB Memory Expansion Kit |
| 76H3584 | 3 | IBM ServeRAID II Ultra SCSI Adapter |
| 04K0149 | 1 | IBM 35/70GB Internal DLT Tape Drive, black |
| 01K7951 | 1 | Netfinity 400W Redundant Power Supply II |
| 08L2549 | 2 | IBM 10/100 EtherJet PCI Adapter |
| 65464AX | 1 | G54 Color Monitor (13.7" Viewable Image Size) stealth black |
| 94G7429 | 2 | 4.51GB Wide Ultra SCSI hot-swap hard disk drive |
| 94G43136/94G4075 | 1 | APC Smart-UPS 1400 (120V) |
| 3518001 | 2 | IBM PC Server Enterprise Expansion Enclosure |
| 94G7491 | 36 | IBM PC Server 4.51GB Wide Ultra hot-swap hard disk drive |
| 94G7593 | 2 | IBM PC Server Power Supply Upgrade II |
| 94G4070 | 2 | Backplane to Backplane Cable |
| 76H2670 | 4 | IBM PC Server hot-swap backplane III |
| 70G9876 | 2 | Expansion Enclosure Backplane Cable |
| 01K8028 | 4 | 3.0M External SCSI Cable |
| 94G7585 | 4 | IBM PC Server Fast/Wide SCSI Repeater |

DB/2 Server is a robust, full-function database management system that includes optimized SQL support, tools to manage data, and access to remote database servers. With this in mind DB/2 stresses the processor system, storage subsystem, and storage devices of a server by working with large data sets to manage the data and provide management decision based on complex queries of data residing on the server by network clients. This sample configuration consists of an IBM Netfinity 7000 with two IBM PC Server Enterprise Expansion Enclosures. The IBM Netfinity 7000 was selected because it provides the power to move the DB/2 data to the clients requesting the data with four-way Pentium Pro processors and sufficient memory to handle complex data cells from the clients as well as high availability and fault tolerant features such as redundant power supplies and an APC Smart-UPS that can gracefully shutdown the server in the event of an interruption of main power or user error. This configuration offers scalability via the ability to grow external storage to over a terabyte using additional IBM PC Server Enterprise Expansion Enclosures and IBM ServeRAID SCSI Adapters. To gain maximum performance over the RAID Wide Ultra SCSI several Drive arrays are created to provide maximum throughput while gaining availability and fault tolerance in the event of a drive failure

SAP R/3 Server

| Part Number | Amount Required | Description |
|-------------------|-----------------|---|
| 8651RMO | 1 | IBM Netfinity 7000 (Pentium Pro200MHz/512KB/256MB/0GB/CD/Advanced Systems Management Adapter) |
| 94G6678 | 3 | PC Server 704 200MHz Upgrade |
| 94G7386 | 4 | 1024MB Memory Expansion Kit ¹ |
| 08L2549 | 1 | IBM 10/100 EtherJet PCI Adapter |
| 01K8009 | 6 | Netfinity 4.51Gb 10K Wide Ultra SCSI SCA-2 HDD |
| 02K3454 | 1 | PCI Fast/Wide Ultra SCSI Adapter |
| 76H3584 | 2 | IBM ServeRAID II Ultra SCSI Adapter |
| 01K7951 | 1 | Netfinity 400W Redundant Power Supply II |
| 35201RU | 4 | IBM Netfinity EXP10 with Redundant Power |
| 01K7968 | 24 | Netfinity EXP10 9.1GB 10K Wide SCSI SCA-2 HDD |
| Rack Suite | | |
| 9306900 | 2 | IBM Netfinity Rack |
| 94G6676/94G6677 | 2 | APC Smart-UPS 3000 RMB (120V) |
| 94G7447 | 4 | Console Cable Set-12ft |
| 94G7446 | 1 | Rack Attachment Kit |
| 01K8027 | 4 | 2.0M SCSI Cable Option |
| 94G7443 | 1 | Rack Keyboard Slide Tray |
| 13H6705 | 1 | IBM Enhanced Keyboard with Trackpoint II (black) |
| 94G7445 | 1 | Console Server Selector Switch |
| 94G7444 | 1 | Monitor Compartment |
| 654640X | 1 | G52 Color Monitor stealth black |
| 94G6667 | 1 | Rack Power Cable Type A14 ² |

| | | |
|---------------------------|---|--|
| 94G6668 | 2 | Rack Power Cable B14 ³ |
| 94G6670 | 1 | Blank Filler Panel Kit |
| 3447-106 | 1 | IBM 3447 Digital Linear Tape Library |
| SAP Dialog Servers | | |
| 8651RM0 | 3 | IBM Netfinity 7000 (Pentium Pro 200MHz/512KB/256MB/0GB/CD/Advanced Systems Management) |
| 94G6678 | 9 | PC Server 704 200MHz Upgrade |
| 08L2549 | 3 | IBM 10/100 EtherJet PCI Adapter |
| 01K7951 | 3 | Netfinity 400W Redundant Power Supply II |
| 94G7429 | 4 | 4.51GB Wide Ultra SCSI hot-swap hard disk drive |
| 94G7386 | 3 | 1024MB Memory Expansion Kit |

1. Remove base memory, install (4) kits for a total of 4GB of system memory.
2. To connect monitor to APC Smart-UPS 3000.
3. To connect Netfinity 7000's to APC Smart-UPS 3000.

SAP R/3 is a distributed application that runs on single or multiple servers providing real-time dynamic information management for enterprises of all sizes. This kind of real-time information management relies heavily on systems ability to process large data sets quickly. The large data sets need to be accessible by multiple systems across a large network of users.

With these criteria in mind the IBM Netfinity 7000, IBM Netfinity Rack, IBM Netfinity EXP10 and IBM 3447 DLT Tape Library provide a solution that is powerful thanks to four-way Pentium Pro 200MHz with 512KB of L2 cache, and available with redundant hot-swap power supplies and RAID protected storage capabilities. As well, the IBM Netfinity Rack provides system and option organization in easy to access enclosures.

To maximize protection against data loss due to failure or user error should also be an integral part of any server in such an important role. The IBM 3447 DLT Tape Library allows unattended backup for large amounts of data. Finally, the APC Smart-UPS will allow graceful shutdown without loss of data in the case of problems with the incoming main power supply.

Internet Server

| Part Number | Amount Required | Description |
|-----------------|-----------------|---|
| 8651TM0 | 1 | IBM Netfinity 7000 (Pentium Pro200MHz/512KB/256MB/0GB/CD/Advanced Systems Management) |
| 94G6678 | 1 | PC Server 704 200MHz Upgrade |
| 94G7386 | 1 | 1024MB Memory Expansion Kit |
| 76H3584 | 1 | IBM ServeRAID II Ultra SCSI Adapter |
| 01K1325 | 1 | IBM 20/40GB 8mm SCSI Tape Drive, black |
| 01K7951 | 1 | IBM Netfinity 400W Redundant Power Supply II |
| 08L2549 | 4 | IBM 10/100 EtherJet PCI Adapter |
| 654640X | 1 | IBM G52 Color Monitor (13.6" Viewable Image Size) stealth black |
| 01K8009 | 9 | Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD |
| 94G6674/94G4075 | 1 | APC Smart-UPS 1400 (120V) |

An Internet Server is a server that handles all requests from the Internet (Intranet or Extranet). Usually this type of server has the same characteristics as a normal file server. The main difference is that an Internet server talks a different language (TCP/IP vs. NETBEUI or IPX/SPX) and often needs to do an extra security check (Firewall). In the case of an Internet server, the server talks mostly to just one client, the Internet provide, instead of many clients like a file server does.

This sample configuration consists of an IBM Netfinity 7000 with redundant power supplies and support for hundreds of Internet clients.

This configuration offers four 10/100 Ethernet adapters to more efficiently communicate to the Internet connection point. The network configuration depends on the method that will be used to connect the server to the Internet. Usually Fast Ethernet routers are used, but if other methods are used, you can add the appropriate adapter. This configuration also includes a tape backup unit for secure backup of critical data in the event of a system or storage failure. The IBM Netfinity Rack was selected as it provides organization and environmental advantages for this cluster as well as additional space for other 19" industry standard rack options. Finally, the APC Smart-UPS and PowerChute Plus software will allow graceful shutdown of the NOS without loss of data in case of problems with power.



IBM Netfinity 7000 M10 Configurator

| Part Number | Processor Speed (MHz) ¹ | SMP Processors std./max | L2 ECC Cache (KB) | Memory: std./max. ⁴ | Form Factor | Hot-Swap Power Supplies Std./max | Int. Hard Drive Storage Std./max(GB) | Wide Ultra SCSI Controller | CD-ROM IDE | 32-bit Hot Plug PCI Slots (Total/Avail.) | 64-bit Hot Plug PCI Slots (Total/Avail.) | Advanced Sys. Management Processor | Hot Swap Components | Redundancy | Bays: (Tot/Avail.) |
|----------------------|------------------------------------|-------------------------|-------------------|--------------------------------|-------------|----------------------------------|--------------------------------------|----------------------------|----------------------|--|--|------------------------------------|---|---|--------------------|
| 86801RU ² | 400 | 1/4-way | 512 | 128MB/8GB | Rack (11U) | 1/3 | 0/72.8 | Dual Channel | 32X-14X ³ | 7/7 | 5/5 | Y | 4 x HDD Bays 12 x PCI Slots Power & Fans | Std.- Fans Optional - Power, LAN, RAID | 6, 4 |
| 86802RU ² | 400 | 1/4-way | 1024 | 256MB/8GB | Rack (11U) | 2/3 | 0/72.8 | Dual Channel | 32X-14X ³ | 7/7 | 5/5 | Y | 4 x HDD Bays 12 x PCI Slots Power & Fans | Std.- Fans Power ⁵ Opt. - LAN, RAID | 6, 4 |
| 86803RU ² | 450 | 1/4-way | 512 | 256MB/8GB | Rack (11U) | 2/3 | 0/72.8 | Dual Channel | 32X-14X ³ | 7/7 | 5/5 | Y | 4 x HDD Bays 12 x PCI Slots Power & Fans | Std.- Fans Power ⁵ Opt. - LAN, RAID | 6, 4 |
| 86804RU ² | 450 | 1/4-way | 1024 | 256MB/8GB | Rack (11U) | 2/3 | 0/72.8 | Dual Channel | 32X-14X ³ | 7/7 | 5/5 | Y | 4 x HDD Bays 12 x PCI Slots Power & Fans | Std.- Fans Power ⁵ Opt. - LAN, RAID | 6, 4 |
| 86805RU ² | 450 | 1/4-way | 2048 | 256MB/8GB | Rack (11U) | 2/3 | 0/72.8 | Dual Channel | 32X-14X ³ | 7/7 | 5/5 | Y | 4 x HDD Bays 12 x PCI Slots Power & Fans | Std.- Fans Power ⁵ Opt. - LAN, RAID | 6, 4 |

1. Netfinity 7000 M10 systems utilize Pentium II Xeon processors.
2. Housed in a 19" Rack mountable drawer and ships standard without a keyboard or mouse. Requires IBM Netfinity Rack (9306900), Netfinity NetBAY22 (9306200), or industry standard 19" Rack, with a minimum depth of 29.23 inches (743mm).
3. Variable read rate. Actual playback speed will vary and is often less than the maximum possible.
4. Memory is four-way interleaved 50ns, EDO, ECC, 168-pin DIMMs. Properly configured memory options allow eight-way or greater interleaving.
5. Fully configured systems may require an optional 3rd power supply for redundancy. See footnote for Netfinity 400 W Hot-Swap Redundant Supply II (P/N 01K7951) for requirements.
6. Not available from IBM after this date. Business Partner inventory may be available.

Processor Upgrades

| Pentium II Xeon Processors with 512KB, 1MB or 2MB Cache | Part Number | SMP Support ¹ | Processor Speed/Cache Upgrade ² |
|---|-------------|--------------------------|--|
| Netfinity 7000 M10 400MHz, 512KB Upgrade | 01K8006 | 1RU | - |
| Netfinity 7000 M10 400MHz, 1MB Upgrade | 01K8007 | 2RU | 1RU |
| Netfinity 7000 M10 450MHz, 512KB Upgrade | 10L5895 | 3RU | 1RU, 2RU |
| Netfinity 7000 M10 450MHz, 1MB Upgrade | 10L5896 | 4RU | 1RU, 2RU, 3RU |
| Netfinity 7000 M10 450MHz, 2MB Upgrade | 10L5897 | 5RU | 1RU, 2RU, 3RU, 4RU |

1. Up to three additional processors may be installed, providing a maximum of four.
2. Requires removal of the standard processor. A maximum of four processors may be installed. Upgrades may require a BIOS update. To obtain the latest flash BIOS, access URL <http://www.ibm.com/pc/support> then select IBM SERVER SUPPORT. Choose a machine-type model, then select Downloadable files and choose the category labeled "BIOS".

Memory Configurator

| Standard Memory Card A | | Optional Memory Card B | | Total Memory | Model 1RU | Models (All except 1RU) |
|------------------------|-----------|------------------------|--|--------------|--|--|
| Bank 4 | | Bank 8 | | 128MB | 4 x 32MB DIMMs Std. | - |
| Bank 3 | | Bank 7 | | 256MB | - | 4 x 64MB DIMMs Std. |
| Bank 2 | | Bank 6 | | 384MB | 1 x 01K8044 | - |
| Bank 1 | Std. DIMM | Bank 5 | | 512MB | - | 1 x 01K8044 ¹ |
| Bank 4 | | Bank 8 | | 640MB | 1 x 01K8045 | - |
| Bank 3 | | Bank 7 | | 768MB | - | 1 x 01K8045 |
| Bank 2 | | Bank 6 | | 896MB | 3 x 01K8044 | - |
| Bank 1 | Std. DIMM | Bank 5 | | 1024MB | - | 3 x 01K8044 ² |
| Bank 4 | | Bank 8 | | 1408MB | 1 x 01K8044, 2 x 01K8045 | - |
| Bank 3 | | Bank 7 | | 1536MB | - | 1 x 01K8044, 2 x 01K8045 ¹ |
| Bank 2 | | Bank 6 | | 2048MB | 4 x 01K8045 ^{2,3} | 4 x 01K8045 ^{2,3} |
| Bank 1 | Std. DIMM | Bank 5 | | 3072MB | 2 x 01K8045, 2 x 01K8046 ^{1,3} | 2 x 01K8045, 2 x 01K8046 ^{1,3} |
| Bank 4 | | Bank 8 | | 4096MB | 4 x 01K8045, 2 x 01K8046, 1 x 01K8004 ^{1,3} | 4 x 01K8045, 2 x 01K8046, 1 x 01K8004 ^{1,3} |
| Bank 3 | | Bank 7 | | 5120MB | 4 x 01K8044, 4 x 01K8046, 1 x 01K8004 ^{4,5} | 3 x 01K8044, 4 x 01K8046, 1 x 01K8004 ⁴ |
| Bank 2 | | Bank 6 | | 6148MB | 4 x 01K8045, 4 x 01K8046, 1 x 01K8004 ^{4,5} | 4 x 01K8045, 4 x 01K8046, 1 x 01K8004 ^{4,5} |
| Bank 1 | Std. DIMM | Bank 5 | | 8GB (max) | 8 x 01K8046, 1 x 01K8004 ^{4,5} | 8 x 01K8046, 1 x 01K8004 ^{4,5} |

This table does not represent all possible memory configurations.

NOTE: 8-way interleaving can be obtained by installing identical memory in one or more of the following adjacent bank pairs: 1/2, 3/4, 5/6, 7/8 or by installing memory in both the standard and optional (P/N 01K8004) memory cards, both being identically configured. Greater than 8-way interleaving can be obtained by combining both 8-way interleaving methods (adjacent banks and identical memory cards). Netfinity 7000 M10 will recognize optimized configurations at boot-up and enable appropriate interleaving.

1. Can be configured for 8-way interleaving.
2. Can be configured for 8-way interleaving or greater than 8-way with Netfinity 7000 M10 Memory Expansion Card (P/N 01K8004).
3. Assumes removal of standard memory DIMMs.
4. Can be configured for greater than 8-way interleaving.
5. Requires removal of standard memory DIMMs.


| DIMM Description | Part Number |
|---|-------------|
| Netfinity 7000 M10 256MB Memory Expansion Kit - 4 x 64 ¹ | 01K8044 |
| Netfinity 7000 M10 512MB Memory Expansion Kit - 4 x 128 ¹ | 01K8045 |
| Netfinity 7000 M10 512MB Advanced Memory Expansion Kit - 4 x 128 ^{1,2} | 28L4732 |
| Netfinity 7000 M10 1GB Memory Expansion Kit - 4 x 256 ¹ | 01K8046 |
| Netfinity 7000 M10 Memory Expansion Card ³ | 01K8004 |

1. DIMM size must be consistent within a Bank. DIMM sizes may vary from Bank to Bank.

2. Advanced ECC DIMMs not only detect and correct single 4-bit memory errors, but detect and correct two 4-bit errors as well. These advanced memory DIMMs significantly improve reliability up to 100 times over current ECC technology. In order to provide this increased reliability for all installed memory, co-existence with other Netfinity 7000 M10 memory is not recommended.

3. Required for installation of DIMMs in Banks 5..8.

Internal Hard Disk Configurator



| Total Internal Disk Storage ¹ | Part Number(s) Required (7200RPM) | | | | Part Number(s) Required (10,000RPM) | | |
|--|-----------------------------------|----------------|----------------|-------------|-------------------------------------|----------------|-------------|
| | 4.5GB | 9.1GB | 18.2GB | 36.4GB | 4.5GB | 9.1GB | 18.2GB |
| 0GB | Standard on Base Models | | | | Standard on Base Models | | |
| 4.5GB | 1 x 94G7429 | - | - | - | 1 x 01K8009 | - | - |
| 9.1GB | 2 x 94G7429 or | 1 x 01K8053 | - | - | 2 x 01K8009 or | 1 x 01K8054 | - |
| 13.5GB | 3 x 94G7429 | - | - | - | 3 x 01K8009 | - | - |
| 18.2GB | 4 x 94G7429 or | 2 x 01K8053 or | 1 x 01K8055 or | - | 4 x 01K8009 or | 2 x 01K8054 or | 1 x 01K8503 |
| 27.2GB | - | 3 x 01K8053 | - | - | - | 3 x 01K8054 | - |
| 36.4GB | - | 4 x 01K8053 or | 2 x 01K8055 or | 1 x 02K0441 | - | 4 x 01K8054 or | 2 x 01K8503 |
| 54.6GB | - | - | 3 x 02K0440 | - | - | - | - |
| 72.8GB (max) | - | - | 4 x 02K0440 or | 2 x 02K0441 | - | - | - |

This table does not represent all possible hard drive configurations.

1. Total Internal Storage listed is within ± 0.2GB unless otherwise noted.



| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description | RPM | Height | Bays Supported | Max Qty. |
|-------------------------------|-------------|-----------------|--------------|------------|-------------|---|--------|--------|----------------|----------|
| - | 3.5" | SL | Yes | Diskette | 94G7429 | 4.51GB Wide Ultra SCSI Hot-Swap HDD | 7200 | SL | HS 1..4 | 4 |
| - | 5.25" | HH | Yes | IDE CD-ROM | 01K8053 | IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 7200 | SL | HS 1..4 | 4 |
| HS 1..4 | HS | SL ¹ | Yes | Open | 01K8055 | IBM Netfinity 18.2GB Wide Ultra SCSI SCA-2 HDD ¹ | 7200 | HH | HS 1/2, 3/4 | 2 |
| Optional NetBAY3 ² | 19" Rack | 3U | Yes | Open | 02K0440 | IBM Netfinity 18.2GB Wide Ultra SCSI Hot-Swap SL HDD | 7200 | SL | HS 1..4 | 4 |
| | | | | | 02K0441 | IBM Netfinity 36.4GB Wide Ultra SCSI Hot-Swap HDD | 7200 | HH | HS 1/2, 3/4 | 2 |
| | | | | | 01K8009 | IBM Netfinity 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | 10,000 | SL | HS 1..4 | 4 |
| | | | | | 01K8054 | IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 10,000 | SL | HS 1..4 | 4 |
| | | | | | 01K8503 | IBM Netfinity 18.2GB 10K Wide Ultra SCA-2 HDD ¹ | 10,000 | HH | HS 1/2, 3/4 | 2 |

1. Two slim-line (SL) bays can be combined to support a single half-high device.
 2. A total of three 3U NetBAY3s can be stacked beneath a Netfinity 7000 M10 which has Netfinity 7000 M10 Rack-to-Tower Conversion Kit installed. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices

1. Two slim-line bays can be combined to support a single half-high (HH) device.


Internal SCSI Cabling

Netfinity 7000 M10 systems contain a backplane supporting four Hot-Swap drive bays. The backplane is connected to one of the two onboard Ultra SCSI controllers through a 16-bit SCSI cable. If a RAID adapter or other supported SCSI adapter is installed for attachment to the internal hard disk drives, the 16-bit SCSI backplane cable is moved from the standard Ultra SCSI controller to the desired controller. The onboard external SCSI port contains a 0.8mm Very High Density Connection Interface (VHDCI) connector and can be used to attach up to 15 SCSI devices with the appropriate SCSI cable.

Typical Options

| Part Number | Monitors |
|-------------|--|
| 654000X | G42 Color Monitor 14" (13.2" Viewable Image Size), pearl white |
| 654102X | G51 Color Monitor 15" (13.6" Viewable Image Size), pearl white |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black |
| 65474AX | G74 Color Monitor 17" (15.9 Viewable Image Size), stealth black |

Monitor Note: Replace 'X' with 'S'(Southern Hemisphere) or 'N'(Northern Hemisphere)

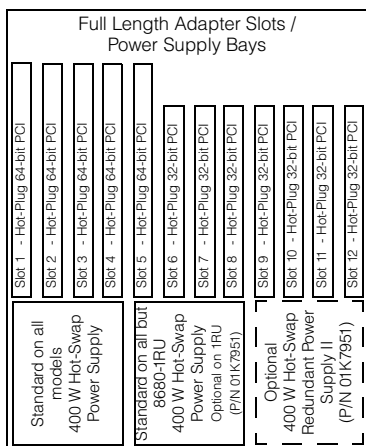

| Part Number | Description | Hot-Plug Support ¹ | Failover Support ² | PCI Bus Support | Adapter Length | Slots Supported ³ |
|-------------------------|--|-------------------------------|-------------------------------|-----------------|----------------|------------------------------|
| 34L0901 | Netfinity 10/100 Ethernet Adapter | X | X | 32-bit | Half | 1..12 ⁵ |
| 34L0301 | Netfinity Gigabit Ethernet SX Adapter | X | X | 32/64-bit | Half | 1..12 |
| 08L3341 | IBM Netfinity 10/100 Fault Tolerant Adapter | X | X | 32-bit | Half | 1..12 |
| Token Ring | | | | | | |
| 34L0501 | Token-Ring 100/16/4 High Speed PCI Adapter | - | X | 32-bit | Half | 1..12 |
| 34L0601 | Token-Ring 16/4 PCI Adapter 2 | - | X | 32-bit | Half | 1..12 |
| iUPS⁴ | | | | | | |
| 94G6674/ 94G6675 | APC Smart-UPS 1400 RMB (12min. runtime at 525VA) | | | | | |
| 94G6676/ 94G6677 | APC Smart-UPS 3000 RMB (35min. runtime at 525VA) | | | | | |

1. All 12 PCI Slots are Hot-Plug capable. For Network Operating System support and limitations access URL <http://www.pc.ibm.com/ap/serverproven/index.html>

2. These adapters support operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations access URL <http://www.ibm.com/pc/us/compat>

3. PCI Slots 1..5 support 64-bit or 32-bit operations. PCI Slots 6..12 support 32-bit operations

4. Stated runtimes and power are for typical configurations (approximately 70% of maximum capacity). For additional information see Appendix C: UPS Runtime Estimate.

5. A maximum of four 34L0901 adapters are supported.

| Part Number | Description | Bays Supported | SCSI Interface (bit) | Form Factor | Termination Included | 68/50-pin Converter Incl. | Ext. Tape Encl. ¹ |
|--|--|------------------|----------------------|-------------------|----------------------|---------------------------|-----------------------------------|
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | N/A ⁷ | 8 | 3.5"HH or 5.25"HH | Y ⁶ | Y | 3510020 |
| 01K1319 | IBM 10/20GB NS Internal SCSI Tape Drive | N/A ⁷ | 8 | 3.5"SL or 5.25"HH | Y ⁶ | Y | 3510020, 3551001 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | N/A ⁷ | 16 | 5.25"HH | N | - | 3510020 ² |
| 01K1320 | IBM 20/40GB DLT SCSI Tape Drive | N/A ⁷ | 8 | 5.25"FH | Y | Y | 3503B0X ² , 3551001 |
| 04K0149 | IBM 35/70GB DLT SCSI Tape Drive | N/A ⁷ | 16 | 5.25"FH | N | - | 3503B0X ² , 3551001 |
| Associated Options | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | External | - | - | 3510020, 3503BOX |
| External Tape Enclosures | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ³ | - | 8/16 | Desktop | - | - | - |
| 3551001 | IBM NetMEDIA Storage Expansion Unit EL ⁴ | - | 16 | Rack | - | - | - |
| 3503BOX | IBM DLT External SCSI Enclosure ⁵ | - | 16 | Desktop | - | - | - |
| External Tape Libraries⁸ | | | | | | | |
| 3447xxx | 3447 Digital Linear Library (desktop-105, rack-106) | - | 16-bit | Desktop or Rack | - | - | - |
| 3449xxx | 3449 8mm Tape Library (deskside-355, rack-356) | - | Differential | Deskside or Rack | - | - | - |
| 3570xxx | Magstar MP 3570 Tape Subsystem (models B2x and C2x) | - | Differential | Rack | - | - | - |

- To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section and the desired enclosure, then refer to Appendix D: Cables - Storage Units - Controllers.
 - Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 - Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either self-termination or SCSI-2 16-bit Active Terminator (P/N 32G3918).
 - Provides a black 3U, LVDS, 19" rack or NetBAY3 mountable tape enclosure. Provides two full high (FH) or four half high (HH) extended length 5.25" bays. External connector is 0.8mm VHDCI.
 - Provides a black desktop DLT tape enclosure. External connector is 68-pin high density. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 - Tape drive is capable of self termination.
 - Netfinity 7000 M10 supports tape drives installed in external enclosures only. See External Tape Enclosure column.
 - Tape library attributes and prerequisites are located in Appendix B: Tape Library Attributes.
- NOTE: SCSI support is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454. Additional tape attributes can be found in Appendix A: Tape Drive Attributes

Other Selected Options

For a complete list of all IBM and non-IBM option compatibility with network operating systems and IBM Netfinity Servers, access the ServerProven™ compatibility pages on the Web at URL <http://www.ibm.com/pc/us/compat>

| Part Number | Other Options |
|---------------------------------------|---|
| Power | |
| 01K7951 | IBM Netfinity 400 W Hot-Swap Redundant Power Supply II ^{1,2} |
| 01K7952 | Netfinity 7000 M10 Dual Cord Power Unit ³ |
| Rack and NetBAY3 Related | |
| 01K8005 | Netfinity 7000 M10 Rack-to Tower Conversion Kit ⁴ |
| 9306900 | IBM Netfinity Rack |
| 9306200 | IBM Netfinity NetBAY22 |
| 10L6912 | IBM Netfinity NetBAY3 ⁵ |
| Keyboard and Mouse⁶ | |
| 28L3640 | Space Saver Keyboard |
| 84G6537 | TrackPoint Caps |
| 01K1260 | TrackPoint IV 104-Key Black Keyboard |
| 76H0109 | IBM 104-Key Keyboard |
| 12J3615 | Black Sleek Mouse |

- Model 8680-1RU contains a single hot-swap power supply. All others contain two. A maximum of three hot-swap power supplies are supported. Redundancy Requirements: Two power supplies provide redundancy until a second memory expansion card or third processor or sixth PCI adapter is installed. Three power supplies provide redundancy for full configurations. No Redundancy: A single power supply provides adequate power until a second memory expansion card or third processor or sixth PCI adapter is installed. Two power supplies provide adequate power for full configurations.
- Includes a power cord which is not used. No additional power source is required.
- Provides power cord redundancy for the Netfinity 7000 M10. A second power source is required.
- Includes casters which can also be used with NetBAY3.
- Up to three NetBAY3's can be stacked beneath models which have Netfinity 7000 M10 Rack-to-Tower Conversion Kit (P/N 01K8005) installed. See IBM Netfinity NetBAY3 Stackable Enclosure section for supported devices.
- All models ship without a mouse or keyboard.



| Part Number | Description | Hot-Plug Support ¹ | Failover Support ² | PCI Bus Support | Adapter Length | Slots Supported ³ |
|--|---|-------------------------------|-------------------------------|-----------------|----------------|------------------------------|
| 02K3454 | PCI Fast Wide Ultra SCSI Adapter ⁴ | - | - | 32-bit | Half | 1...12 |
| 01K7207 | IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ⁵ | X | X | 64/32-bit | Full | 1...12 ³ |
| 28L1003 | IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache ⁶ | - | - | - | - | - |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter ⁷ | X | X | 32-bit | Full | 1...12 |
| 01K7297 | Netfinity Fibre Channel PCI Adapter ⁸ | - | - | 64/32-bit | Half | 1...12 ³ |
| 32H3811 | IBM SSA RAID Adapter for PC Servers ⁹ | - | - | 32-bit | Full | 1...12 |
| Modem¹⁰ | | | | | | |
| 7852400 | External V34 Data/Fax Modem | | | | | |
| External Storage Expansion Units¹¹ | | | | | | |
| 35202RU | IBM Netfinity EXP15 | | | | | |
| 3527001 ¹² | SSA Entry Storage Subsystem for PC Servers | | | | | |

1. All 12 PCI Slots are Hot Plug capable. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
2. These adapters support operation failover, without interruption, to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>
3. PCI Slots 1...5 support 64-bit or 32-bit operations. PCI Slots 6...12 support 32-bit operations.
4. Netfinity 7000 M10 has an onboard external Ultra SCSI port with an industry-standard 68-pin High Density connector and can be used to attach up to 15 SCSI devices with the appropriate SCSI table.
5. Netfinity ServeRAID-3H Ultra2 Adapter (P/N 01K7207) provides one internal and 2 external LVDS SCSI channels. The internal channel can be configured for external usage providing a total of 3 external (0.8 mm VHDCI connectors) LVDS SCSI channels. Limit of 8 supported.
6. Installs on ServeRAID-3H P/N 01K7207 to help protect against data loss in write-back cache mode in the event of a power outage or adapter maintenance.
7. Provides one LVDS channel which is configurable for either internal or external (0.8mm VHDCI connector) usage. Limit of 8 supported.
8. See Netfinity Fibre Channel Solutions section for additional configuration information.
9. System units with greater than 2GB of system memory are limited to RAID 5 operation only.
10. Due to homologation variances, modem availability may differ by country.
11. External Storage Expansion Units require storage controllers and external cables. For specific configuration requirements, see Appendix D: Cables - Storage Units - Controllers.
12. A preconfigured 3527001 (3527-PR0) contains five 91GB HDDs (P/N 21H8734) and a 5 M cable pair (P/N 59H7222). Order P/N 34H8388.

Sample Configurations

The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

High Availability-Rack


| Description | Quantity | Part Number | Usage |
|--|----------|-------------|--|
| IBM Netfinity 7000 M10 (PII Xeon 450-1MB/256MB/Rack) | 1 | 8680-4RU | Power Redundancy standard |
| Netfinity 7000 M10 450MHz/ 1MB Upgrade | 1 | 10L5896 | Total SMP processors: Two |
| Netfinity 7000 M10 256MB Memory Expansion Kit | 1 | 01K8044 | Total: 512MB, 8-way interleave capable |
| IBM Netfinity 9.1GB Wide Ultra SCSI SCA-2 SL HDD | 4 | 01K8053 | - |
| Netfinity 10/100 Ethernet Adapter | 2 | 34L0901 | LAN Failover Enabled ¹ |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter | 2 | 01K7207 | RAID Controller, Failover Enabled ¹ |
| IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache | 2 | 28L1003 | - |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |
| Space Saver Keyboard | 1 | 28L3640 | Includes TrackPoint |
| APC Smart-UPS 3000 RMB | 1 | 94G6676/77 | - |
| External Storage | | | |
| IBM NetMEDIA Storage Expansion Unit EL | 1 | 3551001 | External Tape Drive Enclosure |
| IBM 35/70GB DLT SCSI Tape Drive | 2 | 04K0149 | Installs in 3551001 |
| IBM Netfinity EXP15 | 1 | 35202RU | Provides additional 10 bays |
| Netfinity 2M Ultra2 SCSI Cable | 3 | 03K9310 | EXP15 to ServeRAID-3H, Tape to Onboard |
| IBM Netfinity EXP10 91GB 10K Wide Ultra SCSI SL SCA-2 HDD | 6 | 01K8499 | RAID 5 with Hot-Spare in EXP15 |
| Rack Options | | | |
| IBM Netfinity NetBAY22 | 1 | 9306200 | Monitor and Keyboard mount on top |
| Blank Filler Panel Kit | 1 | 94G6670 | - |

1. These Adapters support hot-plug as well as operation failover (without interruption) to a redundant adapter in the event of an adapter failure. For Network Operating System support and limitations, access URL <http://www.ibm.com/pc/us/compat>.

This high availability server is configured to act as the foundation for business critical applications, applications your business cannot afford to be without. The configuration includes enough disk drives to mirror the operating system and provide a RAID 5 data environment, power supply redundancy by the server and EXP15, a UPS for power even during a blackout and dual ethernet and RAID adapters which can be configured for failover support. A rack mounted tape drive is included to back-up that all important asset.....data. This server represents the leading edge in high availability.

Notes/Exchange-Stack

| Description | Quantity | Part Number | Usage |
|--|----------|-------------|---|
| IBM Netfinity 7000 M10 (PII Xeon 450-1MB/256MB/Rack) | 1 | 8680-4RU | Power Redundancy standard |
| Netfinity 7000 M10 450MHz/ 1MB Upgrade | 3 | 10L5896 | Total SMP processors: Four |
| IBM 7000 M10 512MB Memory Expansion Kit - 4x128 | 2 | 01K8045 | Total: 3GB ¹ , 8-way interleaved |
| Netfinity 7000 M10 1GB Memory Expansion Kit - 4x256 | 2 | 01K8046 | Total: 3GB ¹ , 8-way interleaved |
| Netfinity 7000 M10 Memory Expansion Card | 1 | 01K8004 | Enables 8-way interleaving configuration |
| IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 2 | 01K8054 | - |
| Netfinity 10/100 Ethernet Adapter | 2 | 34L0901 | - |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter | 1 | 01K7207 | RAID Controller |
| IBM Netfinity ServeRAID-3H 32MB Battery-Backup Cache | 1 | 28L1003 | - |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |
| Space Saver Keyboard | 1 | 28L3640 | Includes TrackPoint |
| IBM Netfinity 400W Hot-Swap Redundant Power Supply II | 1 | 01K7951 | Required to preserve power redundancy |
| APC Smart-UPS 3000 RMB | 1 | 94G6676/77 | - |
| External Storage | | | |
| IBM NetMEDIA Storage Expansion Unit EL | 1 | 3551001 | External Tape Drive Enclosure |
| IBM 35/70GB DLT SCSI Tape Drive | 2 | 04K0149 | Installs in 3551001 |
| IBM Netfinity EXP15 | 1 | 35202RU | Provides additional 10 bays |
| Netfinity 2M Ultra2 SCSI Cable | 2 | 03K9310 | EXP15 to ServeRAID-3H, Tape to System |
| IBM Netfinity EXP10 18.2GB 10K Wide Ultra SCSI SCA-2 HDD | 10 | 01K8500 | RAID 5 with Hot-Spare in EXP15 |
| Stack Options | | | |
| Netfinity 7000 M10 Rack-to-Tower Conversion Kit | 1 | 01K8005 | Monitor and Keyboard mount on top |
| IBM Netfinity NetBAY3 | 3 | 10L6912 | Provides space for EXP15, UPS and Tape |

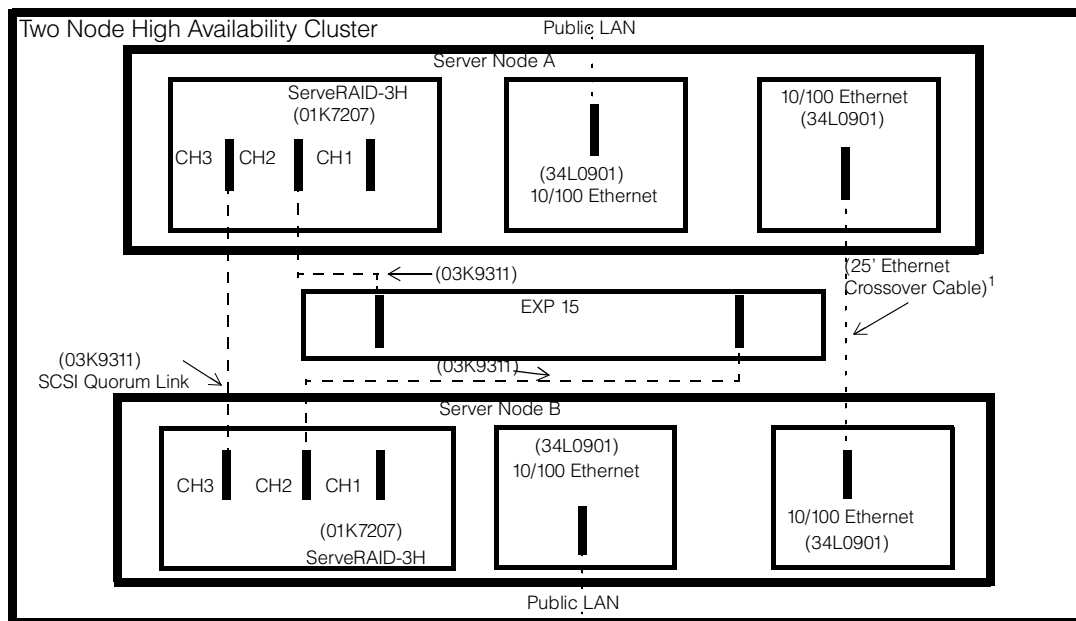

1. Customer supplied Ethernet Crossover Cable may vary in length up to a maximum of 25' (7.6 m).



Two Node High Availability Cluster¹

| Description | Qty. | Part Number | Usage |
|---|------|-------------|---|
| Server Nodes A & B | | | |
| IBM Netfinity 7000 M10 (PII Xeon 450-2MB Cache/256MB/Rack) (11U) | 2 | 8680-5RU | - |
| Netfinity 7000 M10 450MHz, 2MB Upgrade | 6 | 10L5897 | Total SMP processors: 4 each |
| Netfinity 7000 M10 256MB Memory Expansion Kit | 2 | 01K8044 | - |
| Netfinity 7000 M10 512MB Memory Expansion Kit | 4 | 01K8046 | Total: 1.5 GB, 8-way interleave capable |
| Netfinity 7000 M10 Memory Expansion Card | 2 | 01K8004 | Optimizes 8-way interleaving |
| IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter | 2 | 01K7364 | 1 per node for NOS HDDs |
| IBM Netfinity 9.1GB 10K Wide Ultra SCSI SCA-2 SL HDD | 4 | 01K8054 | NOS on Mirrored HDD's |
| Netfinity 10/100 Ethernet Adapter ² | 4 | 34L0901 | 1 Private Interconnect, 1 public |
| IBM Netfinity ServeRAID-3H Ultra2 SCSI Adapter ³ | 2 | 01K7207 | RAID Controller |
| IBM Netfinity 400W Hot-Swap Redundant Power Supply II | 2 | 01K7951 | Required to preserve power redundancy |
| Netfinity 7000 M10 Dual Power Cord Unit | 2 | 01K7952 | Allows redundant power sources |
| APC Smart-UPS 3000 RMB (3U) | 2 | 94G6676/77 | Provides redundant power sources |
| External Storage | | | |
| IBM NetMEDIA Storage Expansion Unit EL (3U) | 1 | 3551001 | External Tape Drive Enclosure |
| APC Smart-UPS 1400 RMB (3U) | 1 | 94G6674/75 | Provides UPS for tape unit |
| Netfinity 2M Ultra2 SCSI Cable ⁴ | 1 | 03K9310 | Attaches 3551001 to onboard SCSI |
| IBM 35/70GB DLT SCSI Tape Drive | 2 | 04K0149 | Installs in 3551001 |
| IBM Netfinity EXP15 (3U) ³ | 1 | 35202RU | - |
| IBM Netfinity EXP10 18.2GB 10K Wide Ultra SCSI SCA-2 HDD ³ | 10 | 01K8500 | RAID 5 Shared Storage |
| Netfinity 4.2 M Ultra2 SCSI Cable ^{3,4} | 2 | 03K9311 | Attach EXP15 to ServeRAID-3H |
| Shared (or single occurrence) Resources | | | |
| G54 Color Monitor 15" (13.7" Viewable Image Size), stealth black | 1 | 65464AX | - |
| Space Saver Keyboard (1U) | 1 | 28L3640 | Includes TrackPoint |
| Netfinity 4.2 M Ultra2 SCSI Cable | 1 | 03K9311 | SCSI Quorum Link |
| Industry Standard 19" Rack, EIA-310D, Min. depth of 29.23" | | | |
| IBM 9306-900 Netfinity Rack | 2 | 9306900 | Provides a total of 84U |
| Rack Attachment Kit | 1 | 94G7446 | Attaches the second rack to the first |
| Monitor Compartment (9U) | 1 | 94G7444 | - |
| Netfinity Rack Keyboard Tray | 1 | 28L4707 | - |
| Netfinity Console Server Selector Switch (4-port) | 1 | 28L0542 | - |
| Power Cable-Type A14 ⁴ | 5 | 94G6667 | - |
| 12 ft Console Cable Set | 2 | 94G7447 | - |
| Side Panel Kit | 1 | 94G6669 | - |
| Blank Filler Panel Kit | 4 | 94G6670 | - |

1. Certified for Microsoft Cluster Server.

2. Requires customer supplied Ethernet Crossover Cable which may vary in length up to a maximum of 25' (7.6 m).

3. By replicating these items, up to a total quantity of four ServeRAID-3H Adapters (plus options) and eleven EXP15's can provide over 2 Terabytes of storage. Additional power and rack space will be required.

4. Cable length requirements are dependent on component placement within the rack or rack suite. To determine specific configuration requirements use the Netfinity Rack Configurator which is downloadable from Web site http://www.pc.ibm.com/us/netfinity/tech_library.html "Configuration Tools"

Clustering is a group of interconnected computers used as a single, unified computing resource. Clustering Netfinity servers, like the IBM Netfinity 7000 M10, provides a high availability solution to keep you in touch with the key applications you need to run your business. High availability solutions are available from IBM to support NT, OS/2, and NetWare operating environments. By using the IBM Netfinity Rack, a high availability cluster with scalable storage expansion can be installed in less floor space.

This sample configuration consists of paired IBM Netfinity 7000 M10 cluster nodes equipped with 4-way SMP capability and redundant power supplies. Microsoft Cluster Server (MSCS) has been certified on IBM Netfinity 7000 M10 servers, using the Netfinity ServeRAID-3H with the EXP15 Storage Expansion Unit. MSCS allows two configured servers, referred to as nodes, to be connected together to form a cluster. Providing system redundancy means that a complete server can fail and client access to server resources is largely unaffected. MSCS extends this theme by also allowing software failures at an application level as well as an operating system level. If the operating system fails, all applications and services can be restarted on another server, and if just one application fails, it can be managed by MSCS individually. An additional independent network connection is used to perform monitoring within the cluster. One or more disk subsystems are attached to both nodes. In the above example, an Netfinity EXP15 was selected and the Netfinity ServeRAID-3H Ultra2 SCSI Adapters provided the I/O control. MSCS requires a dedicated SCSI channel to act as a "SCSI heartbeat" connection. This connection, between the third channel of the ServeRAID-3H Adapter in each node, logically attaches the quorum disk which allows arbitration when a failure occurs.

Additional information on IBM Netfinity and IBM PC Server Clustering Solutions may be found on the World Wide Web by accessing URL <http://www.pc.ibm.com/us/netfinity/clustering.html>.



IBM External Storage Expansion Unit Overview

| Part Number | Withdrawal Date (mmdyy)¹ | Subsystem Type | Total Bays | Hot-Swap Bays: total, available | Maximum Internal Storage Capacity(GB) | Dimensions (in.) (W x D x H) | Form Factor | Max. Cfg. Wt. (lb) | Power Supply |
|----------------------------|--|---------------------------------|-------------------|--|--|-------------------------------------|--------------------|---------------------------|------------------------|
| 3517002 | - | SCSI | 7 | 5, 5 | 45.5 | 7.75 x 19.0 x 16.0 | Tower | - | 480 Watts |
| 3518001 | - | SCSI | 20 | 18, 18 | 163 | 13.9 x 29.7 x 24.5 | Maxi-Tower | 119 | 470 Watts |
| 35202RU Netfinity EXP15 | - | Ultra SCSI ² LVDS | 10 | 10, 10 | 364 | 17.6 x 22.5 x 5.1 | Rack Drawer (3U) | 92 | Redundant 350 Watts |
| 3527001 ³ | - | SSA | 5 | 5, 5 | 45.5 | 7.75 x 19.0 x 16.0 | Tower | - | 480 Watts |

To attach a Storage Enclosure to an IBM Netfinity or PC Server, the following is required:
Attachment to an appropriate PC Server SCSI or SSA controller.

External Cable(s) - See Appendix D: Cables - Storage Units - Controllers.
SCSI Enclosures 3517 and 3518 should be operated at SCSI - 2 speeds.

1. Not available from IBM after this date. Business Partner inventory may be available.

2. See IBM Netfinity EXP15 Configurator Limitations section for additional information.

3. A preconfigured 3527001 (3527-PR0) contains five 9.1GB HDDs (P/N 21H8734) and a 5 M cable pair (P/N 59H7222). Order P/N 34H8388.



IBM SCSI Multi-Storage Enclosure for IBM PC Servers (3517002) Configurator

| 3517-002 | | Bay | Form Factor | Height | Front Access | Usage | Total Disk Capacity | Part Number(s) Required |
|---|---|-------|-------------|--------|-----------------------------|---|--------------------------|-------------------------|
| <div style="border: 1px solid black; padding: 2px; text-align: center;">6</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">5</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">4</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">3</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">2</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">1</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">0</div> | 6 | 5.25" | HH | yes | open (removable media only) | 0GB | N/A | |
| | 5 | 5.25" | HH | yes | open (removable media only) | 13.5GB | 3 x 94G7491 ¹ | |
| | 4 | HS | HH | yes | open | 22.5GB | 5 x 94G7491 ¹ | |
| | 3 | HS | HH | yes | open | 27.3GB | 3 x 02K0477 ¹ | |
| | 2 | HS | HH | yes | open | 45.5(max) | 5 x 02K0477 ¹ | |
| | 1 | HS | HH | yes | open | This table does not represent all possible hard disk configurations. 1. 3517-001s with serial numbers between 01000 and 02499 require the Five-Pack upgrade kit 21H8767. | | |
| | 0 | HS | HH | yes | open | | | |

| Part Number | Description ² | Bays Supported | Qty Supported |
|-------------|--|----------------|---------------|
| 94G7491 | IBM PC Server 4.51GB Wide Ultra SCSI hot-swap HDD ¹ | 0-4 | 5 |
| 94G7492 | IBM PC Server 9.1GB Wide Ultra SCSI hot-swap HDD ¹ | 0-4 | 5 |
| 02K0477 | IBM 9.1GB Wide Ultra SCSI SL Hot-Swap Hard Disk Drive | 0-4 | 5 |
| 21H8767 | Five-Pack upgrade kit | - | 1 |

1. 3517-001s with serial numbers between 01000 and 02499 require the Five-Pack upgrade kit 21H8767.
 2. Ultra SCSI drives must be operated at SCSI-2 speeds in this enclosure.

| UPS ¹ | Part Number |
|--|-----------------|
| APC Smart-UPS 700 (20 min. runtime at 210VA) | 94G3134/94G4073 |
| APC Smart-UPS1000 (36 min. runtime at 210VA) | 94G3135/94G4074 |

1. Stated runtimes and power are for typical configurations (70% of maximum capacity).

| Cables | Part Number |
|--|-------------|
| See External Cable Configuration Table | |
| PC Server F/W to F/W External SCSI Cable | 70G9857 |
| SCSI 68-pin to 50-pin Converter | 32G3925 |
| IBM 1 M External .8mm SCSI Cable | 76H3589 |

Non-US Models require a power cord to be ordered


Sample Configurations

The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Representative for assistance with your specific configuration requirements.

| Part Number | Amount Required | Description |
|-----------------|-----------------|--|
| 3517002 | 1 | PC Server Multi Storage Enclosure |
| 94G7492 | 5 | IBM PC Server 9.1GB Wide Ultra SCSI hot-swap HDD |
| 94G3134/94G4073 | 1 | APC Smart-UPS 700 |
| 70G9857 | 1 | PC Server F/W to F/W External SCSI Cable |

The configuration above provides 45.5GB of storage capacity. The APC UPS provides protection against power problems.

IBM PC Server Enterprise Expansion Enclosure (3518001) Configurator

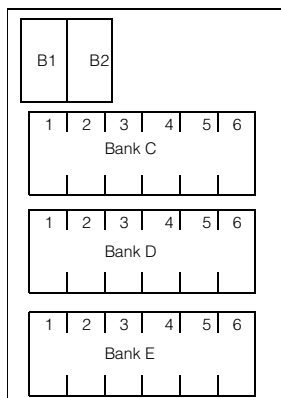

| Total Disk Storage ³ | Part Number(s) Required |
|--|--|
| 0GB | N/A |
| 13.5GB | 3 x 94G7491 |
| 27.1GB | 6 x 94G7491 or 3 x 02K0477 |
| 54.6GB | 6 x 02K0477 |
| 1 Power supply and 1 additional backplane required | |
| 54.1GB ² | 12 x 94G7491, 1 x 94G4701 ¹ , 1 x 76H2670 |
| 109.2GB ² | 12 x 02K0477, 1 x 94G4701 ¹ , 1 x 76H2670 |
| 1 Power supply and 2 additional backplanes required | |
| 81.1GB ² | 18 x 94G7491, 1 x 94G4701 ¹ , 2 x 76H2670 |
| 163.8GB ² (max. hot-swap) | 18 x 02K0477, 1 x 94G4701 ¹ , 2 x 76H2670 |

1. Either 94G7593 or 94G4701 is required when installing the first optional 76H2670 backplane.
2. See "CABLING" section for required cables.
3. Total Disk Storage listed is within ± 0.2GB unless otherwise noted. This table does not represent all possible hard disk configurations.

| Bay | Form Factor | Height | Front Access | Usage | Part Number | Description ² | Bays Supported | Qty Supported |
|------|-------------|--------|--------------|----------------|-------------|---|---------------------------|---------------|
| B1 | 5.25" | HH | yes | open | 94G7491 | IBM PC Server 4.51GB Wide Ultra SCSI hot-swap HDD | C - D - E (1-6) | 18 |
| B2 | 5.25" | HH | yes | open | 94G7492 | IBM PC Server 9.1GB Wide Ultra SCSI hot-swap HDD | C - D - E (1/2, 3/4, 5/6) | 9 |
| C1-6 | HS | SL | yes | Std. backplane | 02K0477 | IBM 9.1GB Wide Ultra SCSI SL Hot-Swap HDD | C-D-E (1-6) | 18 |
| D1-6 | HS | SL | yes | no backplane | 76H2670 | IBM PC Server hot-swap backplane III | Bank D, E | 2 |
| E1-6 | HS | SL | yes | no backplane | 94G7593 | PC Server Power Supply Upgrade II | Note 1 | 1 |
| | | | | | 94G4701 | 780 Watt Redundant Power Option | Note 1 | 1 |

1. Either 94G7593 or 94G4701 is required when installing the first optional 76H2670 backplane.
2. Ultra SCSI drives must be operated at SCSI-2 speeds in this enclosure.

| Internal Cables / Repeater ³ | | |
|---|---|---------------|
| Part Number | Description | Qty supported |
| 94G4070 | Backplane to Backplane Cable Daisy chains with two backplanes | 2 |
| 94G7585 | PC Server SCSI-2 Fast/Wide Enhanced Repeater | 4 |
| 70G9876 | Expansion Enclosure Backplane Cable Connects a backplane to a repeater card or rear panel knockout | 2 |
| 70G9864 | Backplane to Media Bay Cable ¹ | 1 |
| 70G9877 | Expansion Enclosure Media Bay Cable ² | 1 |
| 32G3925 | 68 to 50-pin SCSI converter | 2 |

1. Includes one 68-50-pin converter. Connects 5.25-inch devices in the media bays to a backplane (share the SCSI channel with the hot-swap drives)
2. Includes one 68-50-pin converter 32G3925. Connects 5.25" devices in the media bays to the rear of the enclosure (use a dedicated SCSI channel).
3. See 3518 SCSI Channel Limitations and Example configurations for usage and requirements.

| External Cables | |
|--|---------------------|
| See External Cable Configuration Table | Part Number |
| Security | |
| PC Server Security Cover | 70G9742 |
| UPS¹ | |
| APC Smart-UPS 1000 | 94G3135/ 94G4074 |
| APC Smart-UPS 1400 | 94G3136/ 94G4075 |
| Rack Related | |
| Single Slide Shelf ² | 94G5461 |
| Series 500/700 Mounting Plate ² | 94G4997 |

1. Stated runtimes and power are for typical configurations (70% of maximum capacity).
2. For use when installing the 3518001 tower in IBM Netfinity Rack 9306900(15U). Requires both Single Slide Shelf (P/N 94G5461) and Series 500/700 Mounting Plate (94G4997).



3518 SCSI Channel Limitations¹


| Hot-Swap Hard Disk Drives per Single SCSI Channel | Drive Height² | Number of Hot-Swap Backplanes Required | Non-Hot-Swap Devices | Total SCSI Devices | SCSI Repeater (94G7585) Required | All Supported SCSI Adapters | SCSI Cable Length | Example |
|--|---------------------------------|---|-----------------------------|---------------------------|---|------------------------------------|--------------------------|----------------|
| 6 | SL | 1 | 0 | 6 | N ⁶ | Y | ≤ 1M | A |
| 6 | HH ³ | 2 | 0 | 6 | N ⁶ | Y | ≤ 1M | B |
| 5 | SL | 1 | 1 ⁵ | 6 | N ⁶ | Y | ≤ 1M | C, D |
| 4 | SL | 1 | 2 ⁵ | 6 | N ⁶ | Y | ≤ 1M | C, D |
| 0 | SL | 0 | 2 ⁸ | 2 | N ⁶ | Y | ≤ 1M | A |
| 6 | SL | 1 | 1 ⁵ | 7 | Y | Y | ≤ 4.3M ⁶ | F |
| 5 | SL | 1 | 2 ⁵ | 7 | Y | Y | ≤ 4.3M ⁶ | F |
| 12 | SL | 2 ⁴ | 0 | 12 | Y | N ⁹ | ≤ 4.3M ⁶ | F |
| 9 | HH ³ | 3 ⁷ | 0 | 9 | Y | N ⁹ | ≤ 4.3M ⁶ | E |

1. The 3518 supports up to four SCSI channels (one per backplane and one for the Non-Hot-Swap bays) in a non-cluster environment. Cluster limitations are not addressed by this table.
2. Do not mix Slim-Line (SL) and Half-High (HH) Hot-Swap Hard Disk Drives on a SCSI channel.
3. Two Slim-Line (SL) bays are combined to support one Half-High (HH) device.
4. Requires one additional backplane (P/N 76H2670) and backplane to backplane cable (P/N 94G4070). Additional power supply (P/N 94G7593 or P/N 94G4701) is required when two or more hot-swap backplanes are installed.
5. Requires backplane to Media Bay Cable (P/N 70G9864) which includes one 68-pin to 50-pin converter (P/N 32G3925). All narrow (50-pin) devices require a 68-pin to 50-pin Converter (P/N 32G3925).
6. External cable lengths greater than 1 meter require installation of a PC Server SCSI-2 Fast/Wide Enhanced Repeater (P/N 94G7585).
7. Requires two additional backplanes (P/N 76H2670) and two backplane to backplane cables (P/N 94G4070). Additional power supply (P/N 94G7593 or P/N 94G4701) is required when two or more hot-swap backplanes are installed.
8. Requires one Expansion Enclosure Media Bay Cable (P/N 70G9877) which includes one 68-pin to 50-pin (P/N 32G3925) . All narrow (50-pin) devices require a 68-pin to 50-pin Converter (P/N 32G3925).
9. Requires connection from PC Server SCSI-2 Fast/Wide Enhanced Repeater (P/N 94G7585) to either IBM ServeRAID adapter (P/N 01K7364, 01K7207 or 76H3584) or IBM PC Server Wide Ultra SCSI Adapter (P/N 02K3454, 76H3579 or 76H5407).

IBM PC Server Enterprise Enclosure (3518001)


Non-Repeater Examples

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM representative for assistance with your specific configuration requirements.

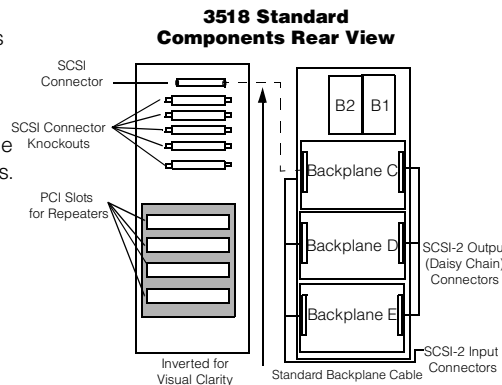

These sample configurations include most of the supported cables and their usage. There are many possible combinations which aren't presented here but can be derived from variations or combinations of these samples. Use the external Cable Configuration Table and Server Configuration pages to assure adapter and cable option compatibility.


Example A

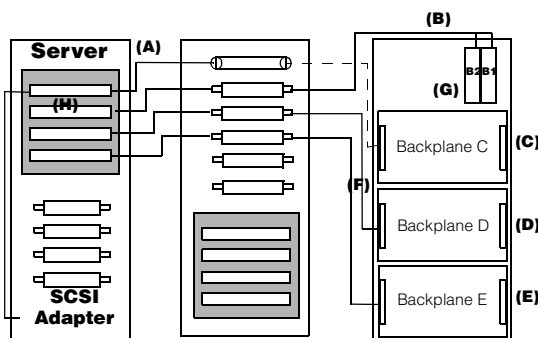

Additional Options Required (Dedicated SCSI Channels)

- (A) 4 x External Cables - no repeater attached \leq 1 meter long (see external cable configuration table)
- (B) 1 x 70G9877 Expansion Enclosure Media Bay Cable. Includes 1 x SCSI 68-pin to 50-pin converter. Mixing Hot-Swap SL & HH HDD's on a single SCSI Channel is not supported
- (C) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- (D) 1 to 6 (SL) or 3 (HH) hot-swap HDD
 - 1 x 76H2670 IBM PC Server hot-swap backplane III
 - 1 x 94G7593 or 94G4701 Power Supply
- (E) 1 to 6 (SL) or 3 (HH) hot-swap HDD
 - 1 x 76H2670 IBM PC Server hot-swap Backplane III
 - Additional Power Supply (D) Services both Backplane D and E
- (F) 2 x 70G9876 Expansion Enclosure Backplane Cable
- (G) Up to 2 non-hot-swap HDD and/or Removable Media Options
- (H) Appropriate SCSI Adapter (See External Cable Configuration Table and Specific Server Configuration sections)


Example B

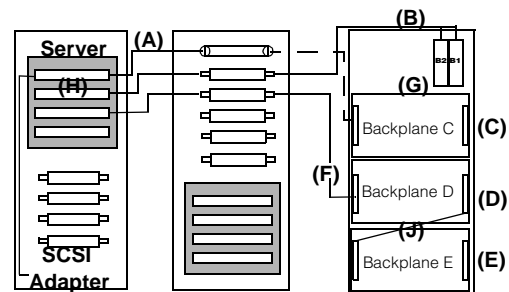

Additional Options Required (Dedicated and Daisy Chained SCSI Channels)

- (A) 3 x External Cables - no repeater attached \leq 1 meter long (See External Cable Configuration Table)
- (B) 1 x 70G9877 Expansion Enclosure Media Bay Cable Includes 1 x SCSI 68 to 50-pin Converter
- (C) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- (D) 1 to 3 (HH) hot-swap HDD
- (E) 1 to 3 (HH) hot-swap HDD
 - 2 x 76H2670 IBM PC Server hot-swap Backplane III
 - 1 x 94G7593 or 94G4701 Power Supply
- (F) 1 x 70G9876 Expansion Enclosure Backplane Cable
- (G) Up to 2 non hot-swap HDD and/or Removable Media Options
- (H) Appropriate SCSI Adapter (See External Cable Configuration Table and Specific Server Configuration Sections)
- (J) 1 x 94G4070 Backplane to Backplane Cable


Example C

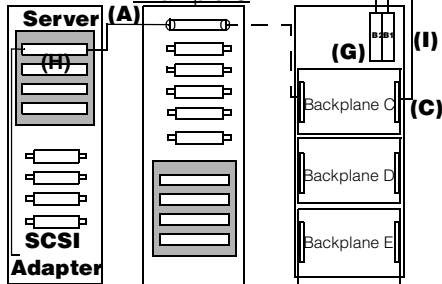

Additional Options Required (Shared SCSI Channel)

- (A) 1 x External Cable - no repeater attached \leq 1 meter long (See External Cable Configuration Table)
- Maximum of 6 SCSI devices per SCSI Channel
- (C) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- (G) Up to 2 non-hot-swap HDD and/or removable media options
- (H) Appropriate SCSI Adapter (See External Cable Configuration and specific Server Configuration sections)
- (I) 1 x 70G9864 Backplane to Media Bay Cable Includes 1 x SCSI 68 to 50-pin Converter Supported on Backplanes "C" and "D" only

Example D

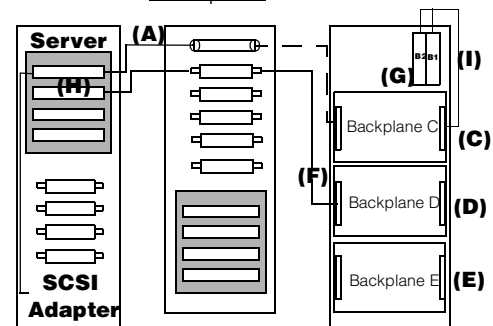


Variation of other sample Configurations

IBM PC Server Enterprise Enclosure (3518001) Repeater Examples

SCSI Repeater Examples

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Representative for assistance with your specific configuration requirements.


3518 Standard Components Rear View

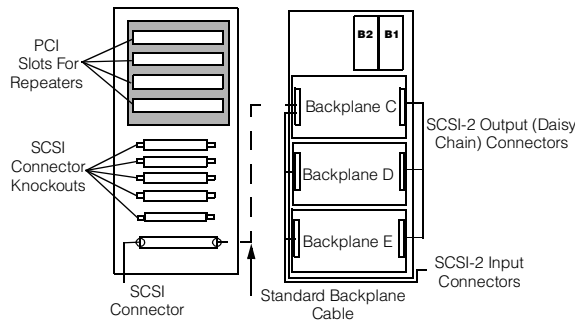

These sample configurations include most of the supported cables and their usage. There are many possible combinations which aren't presented here but can be derived from variations or combinations of these samples. Use the external Cable Configuration Table and Server Configuration pages to assure adapter and cable option compatibility.

Example E

SCSI Repeaters

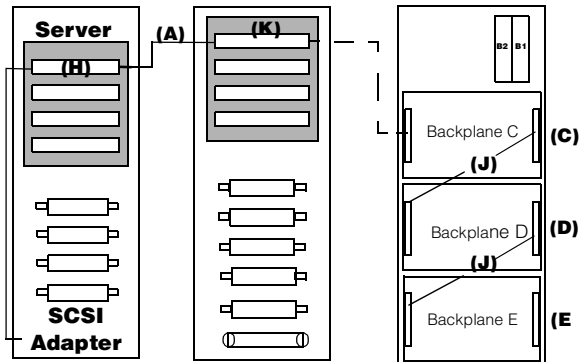


Additional Options Required

- (A) 1 x External Cable - ≤ 4.3 meters long - Repeater Attached (See External Cable Configuration Table)
- Maximum of 12 SL or 9 HH SCSI hot-swap HDDs when attached to 76H3584 PC ServeRAID II or 76H5407 PC Server Wide Ultra SCSI PCI Adapter
- Limits: 2 backplanes using SL HDDs
- 3 backplanes using HH HDDs - Mixing Hot-Swap SL & HH HDD's on a single SCSI channel is not supported.
- Maximum of 7 when attached to other SCSI Adapters
- Limits: 2 backplanes using HH HDDs
- (C) 3 (HH) hot-swap HDD
- (D) 3 (HH) hot-swap HDD
- 1 x 76H2670 IBM PC Server hot-swap Backplane III
- 1 x 94G7593 or 94G4701 Power Supply
- (E) 1 to 3 (HH) hot-swap HDD (All HDD's must be HH).
- 1 x 76H2670 IBM PC Server hot-swap backplane III
- Additional Power Supply (D) Services both Backplanes D and E
- (H) Appropriate SCSI Adapter (See External Cable Configuration and specific Server Configuration sections)
- (J) 2 x 94G4070 Backplane to Backplane Cable
- (K) 1 x 94G7585 IBM SCSI-2 F/W Enhanced Repeater

Example F

SCSI Repeaters

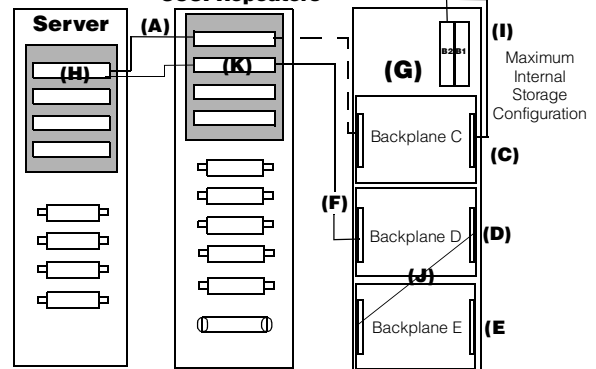

Additional Options Required


- (A) 2 x External Cables - ≤ 4.3 meters long, Repeater Attached (See External Cable Configuration Table)
- Maximum of 7 SCSI devices when using Repeater 94G7585 and Bay devices.
- Mixing Hot-Swap SL & HH HDD's on a single SCSI channel is not supported.
- (C) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- (D) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- 1 x 76H2670 IBM PC Server hot swap Backplane III
- 1 x 94G7593 or 94G4701 Power Supply
- (E) 1 to 6 (SL) or 3 (HH) hot-swap HDD
- 1 x 76H2670 IBM PC Server hot-swap backplane III
- Additional Power Supply (D) Services both Backplanes D and E
- (F) 1 x 70H9876 Expansion Enclosure Backplane Cable
- (H) 76H3584 PC ServeRAID II Ultra SCSI Adapter (See External Cable Configuration Table and Specific Server Configuration sections)
- (G) Up to 2 non-hot-swap HDD and/or removable media options
- (I) 1 x 70G9864 Backplane to Media Bay Cable
- Includes 1 x SCSI 68 to 50-pin Converter
- Supported on Backplanes "C" and "D" only
- (J) 1 x 94G4070 Backplane to Backplane Cable
- (K) 2 x 94G7585 IBM SCSI-2 F/W Enhanced Repeaters

IBM Netfinity EXP15 (3520-2RU) Configurator

Hard Disk Drive Configurator

Netfinity EXP15 19" Rack Drawer¹

3520-2RU
(0.8mm VHDCI Connectors)



| Total Disk Capacity | Part Number(s) Required, 7,200 RPM | Part Number(s) Required, 10,000 RPM |
|---------------------|--------------------------------------|--------------------------------------|
| 0GB | Open Bay Standard on all Base Models | Open Bay Standard on all Base Models |
| 22.5GB | 5 x 01K7956 | 5 x 01K7960 |
| 45.1GB | 10 x 01K7956 | 10 x 01K7960 |
| 45.5GB | 5 x 01K7959 | 5 x 01K8499 |
| 91.0GB | 10 x 01K7959 | 10 x 01K8499 |
| 182GB | 10 x 01K8501 | 10 x 01K8500 |
| 364 (max) | 10 x 02K0442 | - |

This table does not represent all valid hard disk drive configurations.

1. Requires installation in an IBM Netfinity Rack (9306900), NetBAY22 (9306200), NetBAY3 (10L6912) or an Industry Standard 19 inch rack cabinet that meets EIA-310-D and a depth of at least 24 inches.

| Bay | BUS | Form Factor | Height | Front Access | Usage | Part Number | Description | Bays Supported | Qty Supported |
|------------|-----|-------------|--------|--------------|-------|-------------|--|----------------|---------------|
| 1,3,5,7,9 | 1 | HS | HH | yes | open | 01K7956 | IBM Netfinity EXP10 4.51GB Wide Ultra SCSI SCA-2 HDD | All | 10 |
| 2,4,6,8,10 | 2 | HS | HH | yes | open | 01K7959 | IBM Netfinity EXP10 9.1GB Wide Ultra SCSI SCA-2 HDD | All | 10 |
| | | | | | | 01K8501 | IBM Netfinity EXP10 18.2GB Wide Ultra SCSI SCA-2 HDD | All | 10 |
| | | | | | | 02K0442 | IBM Netfinity EXP 36.4GB Wide Ultra SCSI Hot-Swap HDD | All | 10 |
| | | | | | | 01K7960 | IBM Netfinity EXP10 4.51GB 10K Wide Ultra SCSI SCA-2 HDD | All | 10 |
| | | | | | | 01K7968 | IBM Netfinity EXP10 9.1GB 10K Wide Ultra SCSI SCA-2 HDD | All | 10 |
| | | | | | | 01K8499 | IBM Netfinity EXP10 9.1GB 10K Wide Ultra SCSI SL SCA-2 HDD | All | 10 |
| | | | | | | 01K8500 | IBM Netfinity EXP10 18.2GB 10K Wide Ultra SCSI SCA-2 HDD | All | 10 |





Limitations

The Netfinity EXP15 is not supported when the SCSI channel of the SCSI adapter to which it is attached is split between internal devices and external devices. Each Netfinity EXP15 must be attached to a dedicated SCSI channel of a supported SCSI adapter. Ultra SCSI mode is not supported when external cables are greater than 2.0 meters in length unless attached to a supported Ultra-2 SCSI adapter (other restrictions may apply; see Appendix D). Netfinity EXP15 is supported as a rack drawer and is not currently supported for stacking directly on top of one another. Netfinity EXP15 can be installed in Netfinity NetBAY3 storage units stacked up to three units high with a supported server on top.

**Cables and Controllers:
See Appendix D: Cables - Storage Units - Controllers**

Sample Configurations

The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

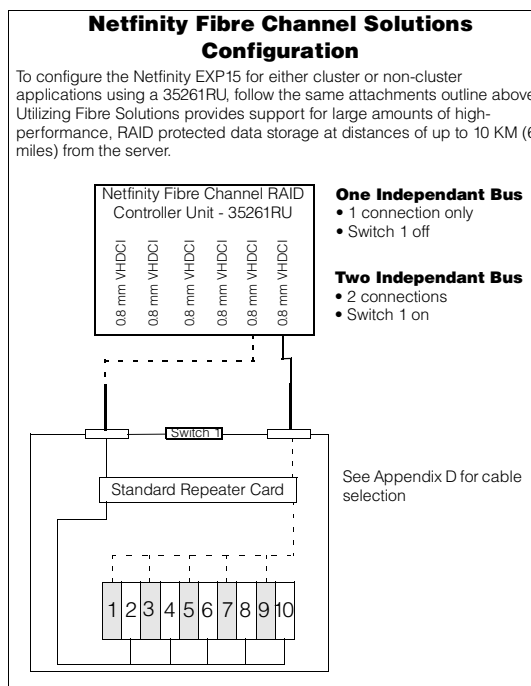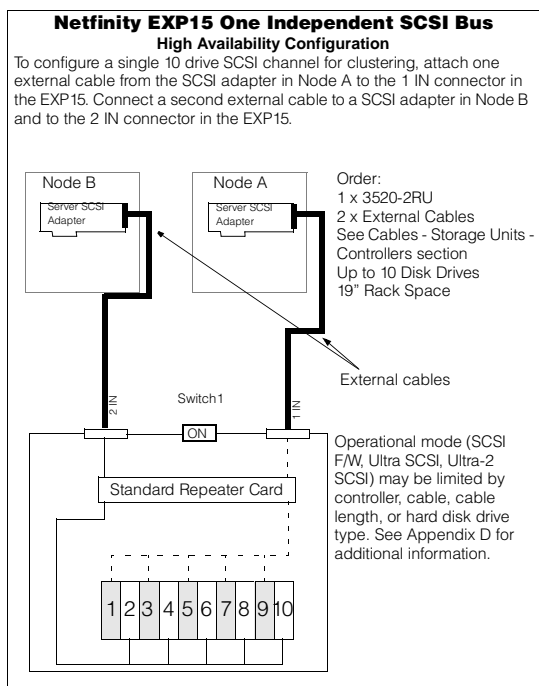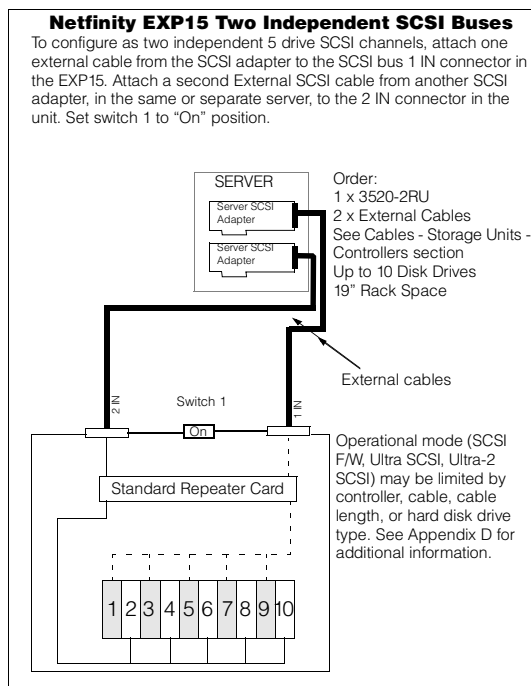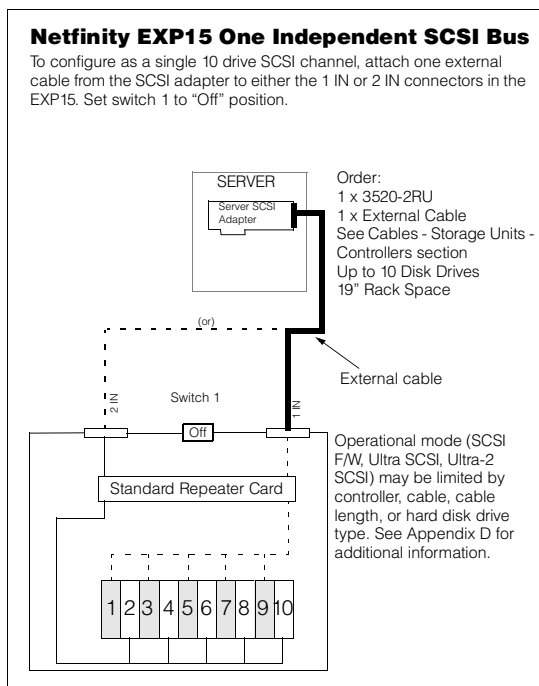

IBM SSA Entry Storage Subsystem for PC Servers (3527001) Configurator

To attach the 3527 SSA Entry Subsystem to an IBM Netfinity or IBM PC Server, the following is required:

- The SSA RAID Adapter installed in an IBM Netfinity or IBM PC Server
- SSA Cables

| Slot | Form Factor | Height | Front Access | Usage | Total Disk Cap. | Part Number(s) Required | Part Number | Description | Bays Supported | Qty Supported |
|------|-------------|--------|--------------|--------------------|-----------------|--------------------------|----------------------|----------------------------|----------------|---------------|
| 1 | SSA HS | HH | Yes | must contain a HDD | 0GB | None ¹ | 27H1062 | 4.51GB SSA SL hot-swap HDD | 1-5 | 5 |
| 2 | SSA HS | HH | Yes | open | 13.5GB | 3 x 27H1062, 2 x 05J6411 | 21H8734 ¹ | 9.1GB SSA hot-swap HDD | 1-5 | 5 |
| 3 | SSA HS | HH | Yes | open | 22.5GB | 5 x 27H1062 | 05J6411 | Dummy Disk Drive Module | 2,3,4 | 3 |
| 4 | SSA HS | HH | Yes | open | 27.3GB | 3 x 21H8734, 2 x 05J6411 | | | | |
| 5 | SSA HS | HH | Yes | must contain a HDD | 45.5GB | 5 x 21H8734 | | | | |

1. A preconfigured 3527001 (3527-PR0) contains five 9.1GB HDDs (P/N 21H8734) and 5 M. cable pair (P/N 59H7222). Order P/N 34H8388.

1. A minimum of 2 hard disk drives are required. All slots must contain a hard disk drive or dummy module
Note: This table does not represent all possible hard disk drive configurations.

Limitations

All five disk drive slots in a 3527 must be filled with either an SSA disk drive or an SSA dummy disk drive module. A maximum of three neighboring dummy disk drive modules can be connected in a particular SSA loop. Hard disk drives must be installed in slots 1 and 5. The maximum number of drives per RAID adapter 32H3811 loop is 48. The maximum number of drives per RAID adapter 32H3811 is 96. Each SSA loop must be connected to a valid pair of SSA adapter connectors (A1 and A2, or B1 and B2). Only one of the two pairs of connectors on RAID adapter 32H3811 can be connected in a particular SSA loop. The 3527 can be placed a maximum of 25 meters from the server or adjacent 3527s in a particular loop.

| Server RAID Adapters | Part Number |
|--|-----------------|
| IBM SSA RAID Adapter for PC Servers ¹ | 32H3811 |
| UPS | |
| APC Smart-UPS 700 | 94G3134/94G4073 |
| APC Smart-UPS 1000: | 94G3135/94G4074 |
| APC Smart-UPS 1400 | 94G3136/94G4075 |


1. System units with greater than 2GB of system memory are restricted to RAID 5 operation only.

| External Cables | Part Number |
|--------------------------------------|----------------------|
| External SSA Cable, pair, 1.0 meter | 59H7220 |
| External SSA Cable, pair, 2.5 meter | 59H7221 |
| External SSA Cable, pair, 5.0 meter | 59H7222 ¹ |
| External SSA Cable, pair, 10.0 meter | 59H7223 |
| External SSA Cable, pair, 25.0 meter | 59H7224 |

1. A preconfigured 3527001 (3527-PR0) contains five 9.1GB HDDs (P/N 21H8734) and 5 M. cable pair (P/N 59H7222). Order P/N 34H8388.

Maximum Configuration per SSA RAID Adapter


The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM representative for assistance with your specific configuration requirements.

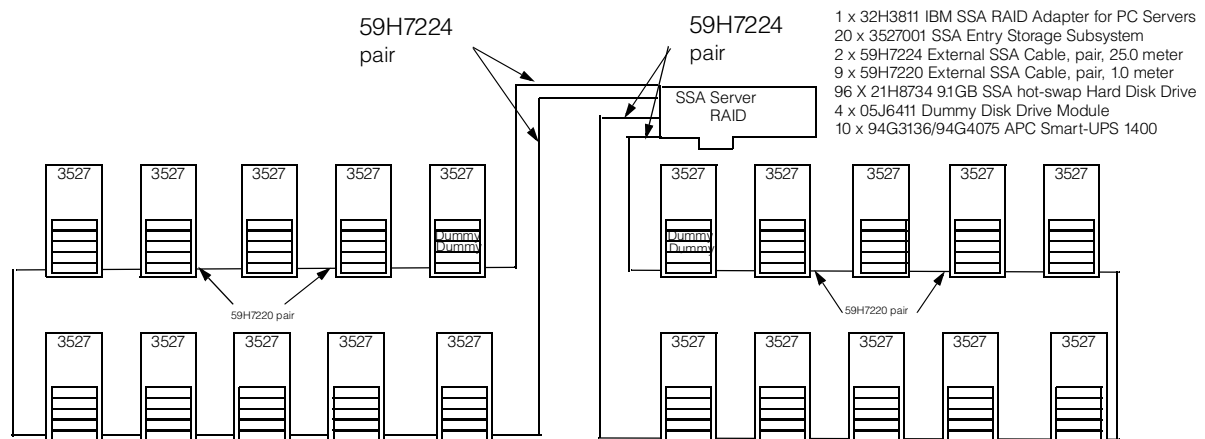



IBM Netfinity Fibre Channel Solutions

Netfinity Fibre Channel RAID Controller Unit 35261RU

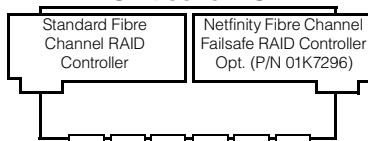


- Contains a single Short-Wave Fibre Connection (use cable group D) and six female 0.8 mm Very High Density Connection Interface (VHDCI) SCSI connectors (EXP15 - use cable group A, EXP10 - use cable group B)
- Hot-Swap Redundant Fans and Power Supplies
- Optional Netfinity Fibre Channel Failsafe RAID Controller (P/N 01K7296) provides a redundant RAID controller and second Short-Wave Fibre Connection (use cable group D).
- Attach directly to Netfinity Fibre Channel PCI Adapter(s) (P/N 01K7297) or indirectly through Netfinity Fibre Channel Hub (P/N 35231RU) using cables from cable group D
- Height is 4 U (1 U = 1.75 in or 44.45 mm)
- Requires Netfinity Rack, Netfinity NetBAY22 or 19-inch EIA-D Industry-Standard Rack. Mounting rails are included with the controller.
- For optimum performance no more than two RAID controller units (P/N 35261RU) should be attached to a single hub (P/N 35231RU).

Netfinity Fibre Channel Hub 35231RU



- Seven-port Fibre Channel Hub chassis
- Includes four standard Netfinity Fibre Channel Short-Wave GBIC's (GigaBit Interface Converters)
- GBIC's supported
 - Netfinity Fibre Channel Short-Wave GBIC (P/N 03K9308) supports Cable Group D
 - Netfinity Fibre Channel Long-Wave GBIC (P/N 03K9307) supports Cable Group E
- Supported Attachments (up to seven with available GBIC):
 - Netfinity Fibre Channel PCI Adapter (P/N 01K7297) requires cable group D with short-wave GBIC
 - Second Netfinity Fibre Channel Hub (P/N 35231RU) requires cable group D or E with corresponding GBIC
 - Netfinity Fibre Channel RAID Controller Unit 35261RU requires cable group D and short-wave GBIC
- Height is 1 U (1 U = 1.75 in or 44.45 mm). Two units can be mounted side-by-side in a 1 U space.
- Requires Netfinity Rack, Netfinity NetBAY22 or 19-inch EIA-D Industry-Standard Rack. Mounting hardware is included with the hub.
- For optimum performance no more than two RAID controller units (P/N 35261RU) should be attached to a single hub (P/N 35231RU)

Netfinity Fibre Channel PCI Adapter (P/N 01K7297)



- PCI to FCAL 64/32-bit host adapter
- Supported Attachments (use cable group D):
 - Netfinity Fibre Channel Hub (P/N 35231RU), requires available short-wave GBIC in hub
 - Netfinity Fibre Channel RAID Controller Unit 35261RU
 - Netfinity Fibre Channel Failsafe RAID Controller (P/N 01K7296)


| Part Number | Description |
|-------------|--|
| 35261RU | Netfinity Fibre Channel RAID Controller Unit |
| 35231RU | Netfinity Fibre Channel Hub |
| 01K7296 | Netfinity Fibre Channel Failsafe RAID Controller |
| 01K7297 | Netfinity Fibre Channel PCI Adapter |
| 03K9305 | Netfinity Fibre Channel 25 M Cable |
| 03K9306 | Netfinity Fibre Channel 5 M Cable |
| 03K9307 | Netfinity Fibre Channel Long-Wave GBIC |
| 03K9308 | Netfinity Fibre Channel Short-Wave GBIC |

| Supported Cable Groups | |
|--|--|
| Cable Group A (0.8 mm to 0.8 mm) | |
| 03K9310 | Netfinity 2 M Ultra2 SCSI Cable |
| 03K9311 | Netfinity 4.2 M Ultra2 SCSI Cable |
| 03K9312 | Netfinity 12 M Ultra2 SCSI Cable |
| Cable Group B (68-pin to 0.8 mm) | |
| 76H3589 | 1 M External .8mm SCSI Cable ¹ |
| 01K8027 | 2 M External .8mm SCSI Cable |
| 03K9352 | 3 M External Auto-Sensing Cable |
| 01K8029 | 4.3 M External .8mm SCSI Cable |
| Cable Group D (Short-Wave Fibre) | |
| 03K9306 | Netfinity Fibre Channel 5 M Cable |
| 03K9305 | Netfinity Fibre Channel 25 M Cable |
| Customer supplied short-wave cable of up to 500 meters (0.31 miles) | |
| Cable Group E (Long-Wave Fibre) | |
| Customer supplied long-wave cable of up to 10 kilometers (6.2 miles) | |
| GBIC | |
| 03K9308 | Netfinity Fibre Channel Short-Wave GBIC ² |
| 03K9307 | Netfinity Fibre Channel Long-Wave GBIC |

1. Rack installation requires a minimum cable length of 2 meters.
2. Four Netfinity Fibre Channel Short-Wave GBIC's (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU).

Configuration Examples - Cable Group ()


1. Configured as two independent 5 HDD buses.

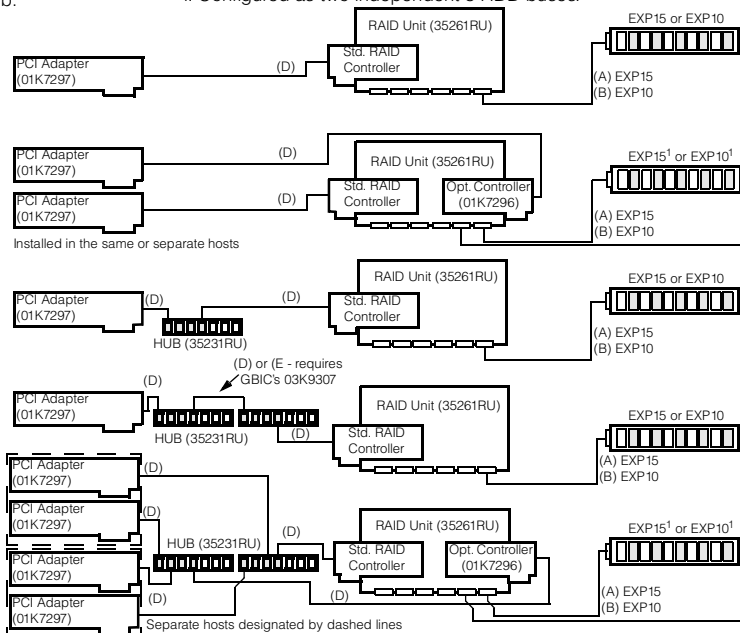

IBM Netfinity Fibre Channel Solutions

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements

High-speed single-node Netfinity Fibre Channel Storage configuration offering performance, bandwidth & capacity

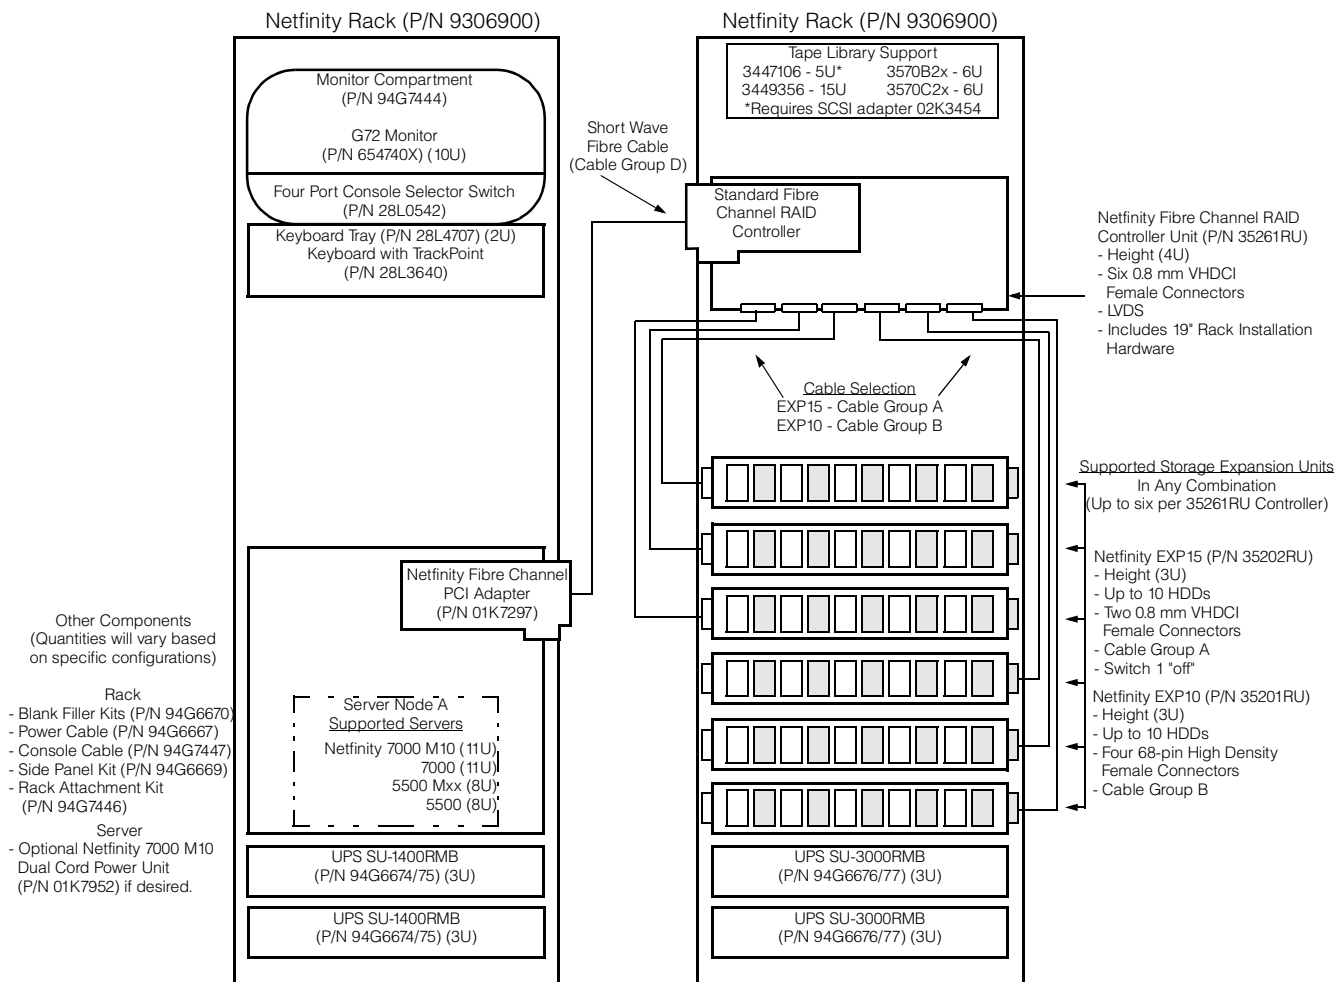

Additional Information and Configuration Tools Available
 Australia: <http://www.pc.ibm.com/au/configxpert/html>
 New Zealand: <http://www.pc.ibm.com/nz/configxpert/html>
 Singapore: <http://www.pc.ibm.com/sg/configxpert/html>
 ASEAN: <http://www.pc.ibm.com/asean/configxpert/html>


| | |
|---|--|
| <p>Connector Types 68-pin - High Density Connector 0.8 mm - Very High Density Connection Interface VHDCI</p> <p>Cable Group A (0.8 mm to 0.8 mm) 03K9310 - Netfinity 2 M Ultra2 SCSI Cable 03K9311 - Netfinity 4.2 M Ultra2 SCSI Cable 03K9312 - Netfinity 12 M Ultra2 SCSI Cable</p> <p>Cable Group B (68-pin to 0.8 mm) 76H3589 - 1 M External .8mm SCSI Cable¹ 01K8027 - 2 M External .8mm SCSI Cable 03K9352 - 3 M External Auto-Sensing Cable 01K8029 - 4.3 M External 0.8mm SCSI Cable</p> | <p>Cable Group D (Short-Wave Fibre) 03K9306 - Netfinity Fibre Channel 5 M Cable 03K9305 - Netfinity Fibre Channel 25 M Cable Customer supplied short-wave cable of up to 500 meters (0.31 miles)</p> <p>Cable Group E (Long-Wave Fibre) Customer supplied long-wave cable of up to 10 kilometers (6.2 miles)</p> <p>GBIC 03K9308 - Netfinity Fibre Channel Short-Wave GBIC² 03K9307 - Netfinity Fibre Channel Long-Wave GBIC</p> <p>1. Rack installation requires a minimum cable length of 2 meters. 2. Four Netfinity Fibre channel Short-Wave GBIC's (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU)</p> |
|---|--|



IBM Netfinity Fibre Channel Solutions

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements

High-speed single-node Netfinity Fibre Channel Storage configuration with Microsoft NT failover support and RAID redundancy for availability, performance, capacity

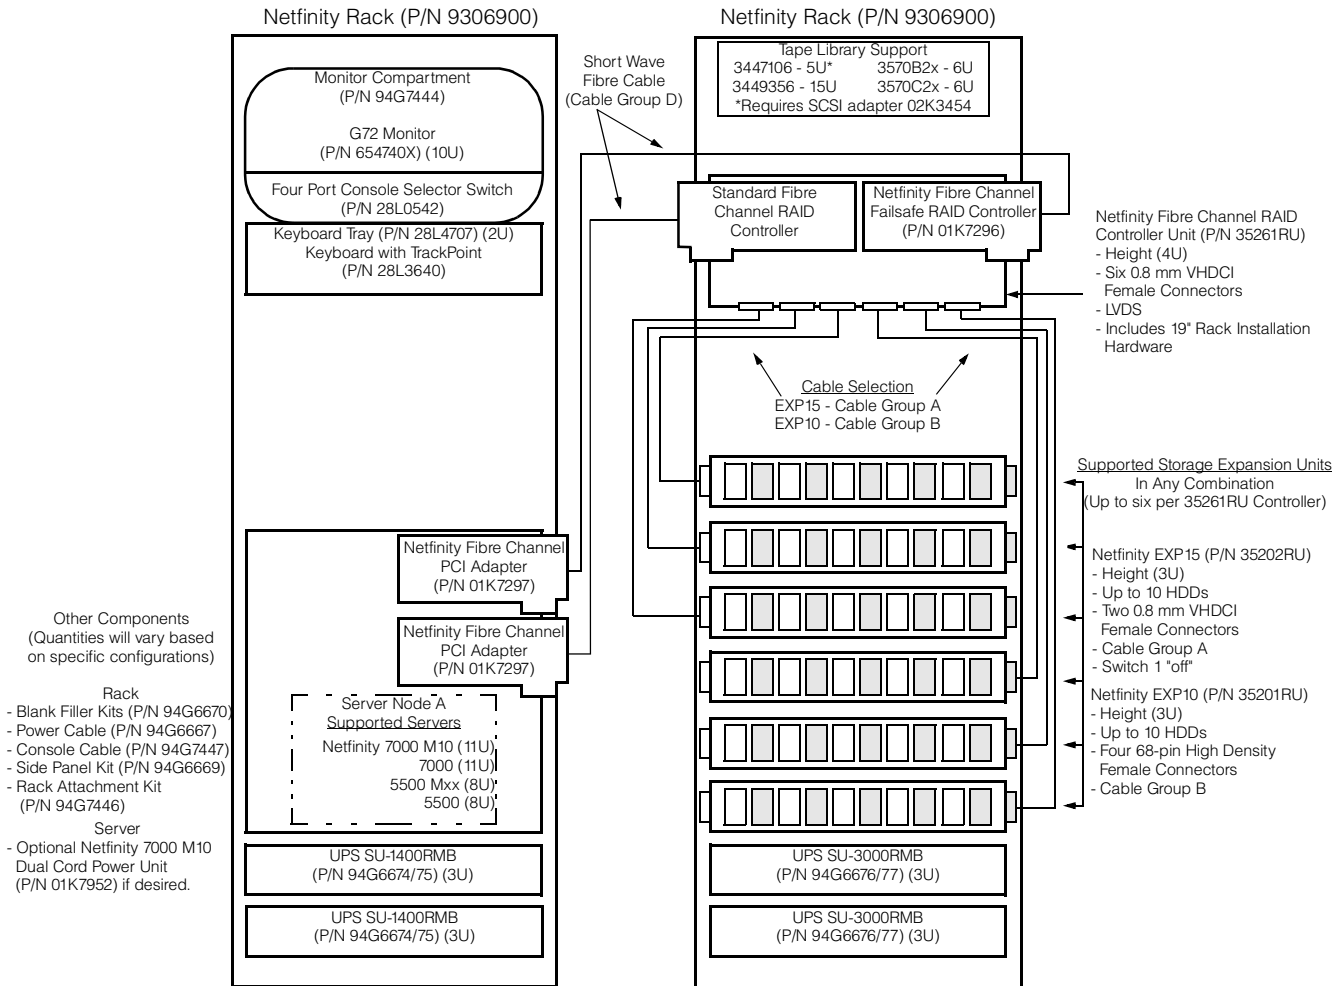

Additional Information and Configuration Tools Available
 Australia: <http://www.pc.ibm.com/au/configxpert/html>
 New Zealand: <http://www.pc.ibm.com/nz/configxpert/html>
 Singapore: <http://www.pc.ibm.com/sg/configxpert/html>
 ASEAN: <http://www.pc.ibm.com/asean/configxpert/html>


| | |
|---|--|
| <p>Connector Types</p> <p>68-pin - High Density Connector 0.8 mm - Very High Density Connection Interface VHDCI</p> <p>Cable Group A (0.8 mm to 0.8 mm) 03K9310 - Netfinity 2 M Ultra2 SCSI Cable 03K9311 - Netfinity 4.2 M Ultra2 SCSI Cable 03K9312 - Netfinity 12 M Ultra2 SCSI Cable</p> <p>Cable Group B (68-pin to 0.8 mm) 76H3589 - 1 M External .8mm SCSI Cable¹ 01K8027 - 2 M External .8mm SCSI Cable 03K9352 - 3 M External Auto-Sensing Cable 01K8029 - 4.3 M External 0.8mm SCSI Cable</p> | <p>Cable Group D (Short-Wave Fibre) 03K9306 - Netfinity Fibre Channel 5 M Cable 03K9305 - Netfinity Fibre Channel 25 M Cable Customer supplied short-wave cable of up to 500 meters (0.31 miles)</p> <p>Cable Group E (Long-Wave Fibre) Customer supplied long-wave cable of up to 10 kilometers (6.2 miles)</p> <p>GBIC 03K9308 - Netfinity Fibre Channel Short-Wave GBIC² 03K9307 - Netfinity Fibre Channel Long-Wave GBIC</p> <p>1. Rack installation requires a minimum cable length of 2 meters. 2. Four Netfinity Fibre channel Short-Wave GBIC's (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU)</p> |
|---|--|

IBM Netfinity Fibre Channel Solutions

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements

Cluster Solution

High speed multiple node Microsoft Cluster Server and Netfinity Fibre Channel Storage configuration offering data protection and RAID redundancy.

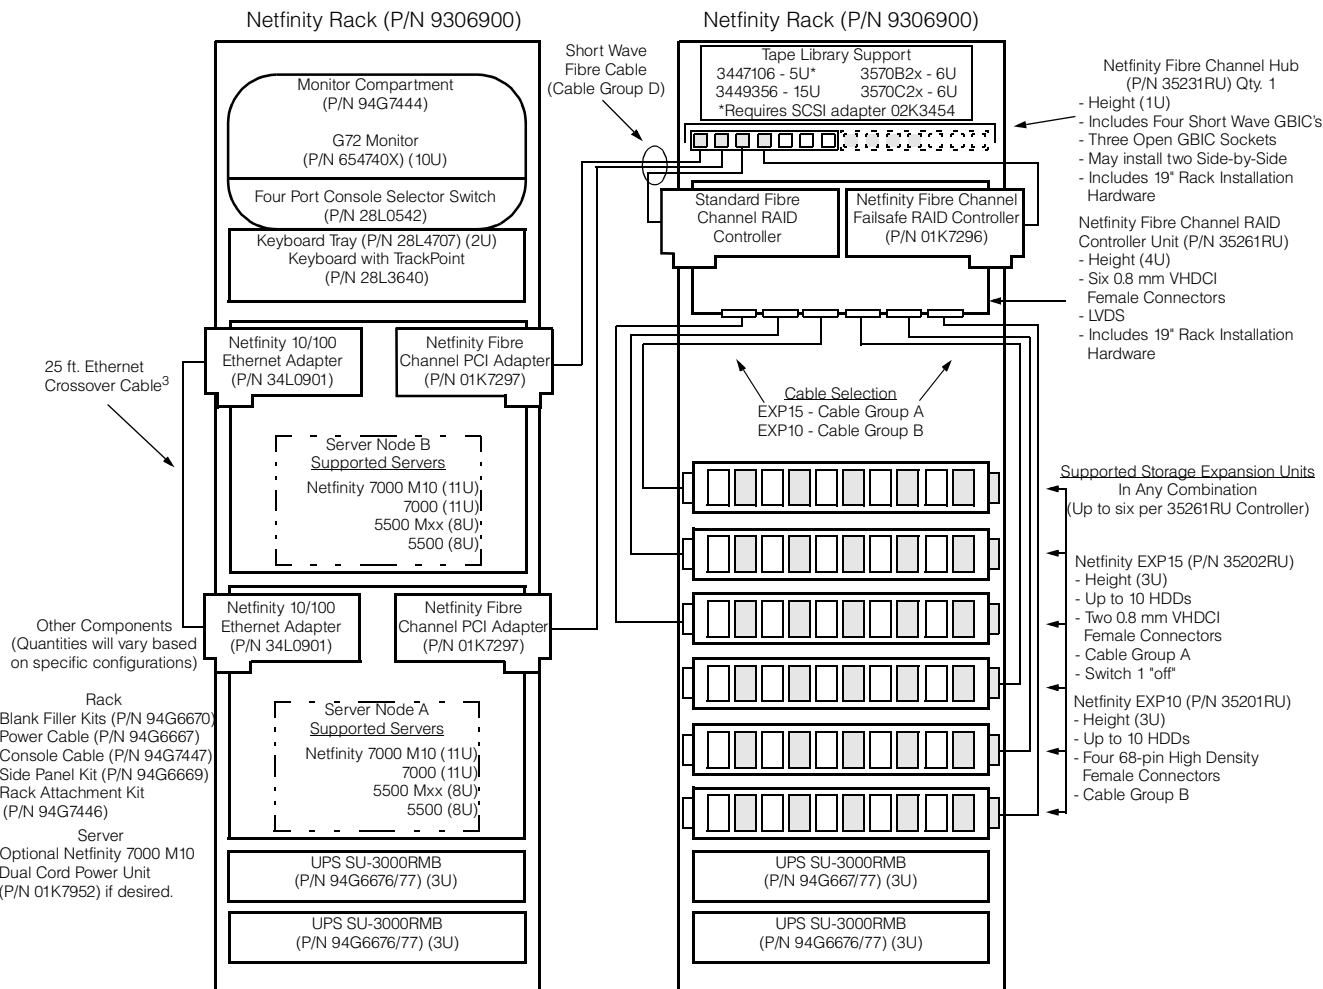

| | |
|---|---|
| <p>Connector Types</p> <ul style="list-style-type: none"> 68-pin - High Density Connector 0.8 mm - Very High Density Connection Interface VHDCI | <p>Cable Group D (Short-Wave Fibre)</p> <ul style="list-style-type: none"> 03K9306 - Netfinity Fibre Channel 5 M Cable 03K9305 - Netfinity Fibre Channel 25 M Cable Customer supplied short-wave cable of up to 500 meters (0.31 miles) |
| <p>Cable Group A (0.8 mm to 0.8 mm)</p> <ul style="list-style-type: none"> 03K9310 - Netfinity 2 M Ultra2 SCSI Cable 03K9311 - Netfinity 4.2 M Ultra2 SCSI Cable 03K9312 - Netfinity 12 M Ultra2 SCSI Cable | <p>Cable Group E (Long-Wave Fibre)</p> <ul style="list-style-type: none"> Customer supplied long-wave cable of up to 10 kilometers (6.2 miles) |
| <p>Cable Group B (68-pin to 0.8 mm)</p> <ul style="list-style-type: none"> 76H3589 - 1 M External .8mm SCSI Cable¹ 01K8027 - 2 M External .8mm SCSI Cable 03K9352 - 3 M External Auto-Sensing Cable 01K8029 - 4.3 M External 0.8mm SCSI Cable | <p>GBIC</p> <ul style="list-style-type: none"> 03K9308 - Netfinity Fibre Channel Short-Wave GBIC² 03K9307 - Netfinity Fibre Channel Long-Wave GBIC |


1. Rack installation requires a minimum cable length of 2 meters.
2. Four Netfinity Fibre channel Short-Wave GBIC's (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU)
3. Microsoft Cluster Server (MSCS) requires a private interconnect between clustered nodes. A 25 ft. Ethernet crossover cable is shown but not available from IBM as a separate option. Contact your IBM Business Partner for assistance.



IBM Netfinity Fibre Channel Solutions

Note: The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements

Advanced high-speed high-availability multiple node Microsoft Cluster Server and fully redundant Netfinity Fibre Channel Storage configuration offering the highest levels of data protection and availability and access to data

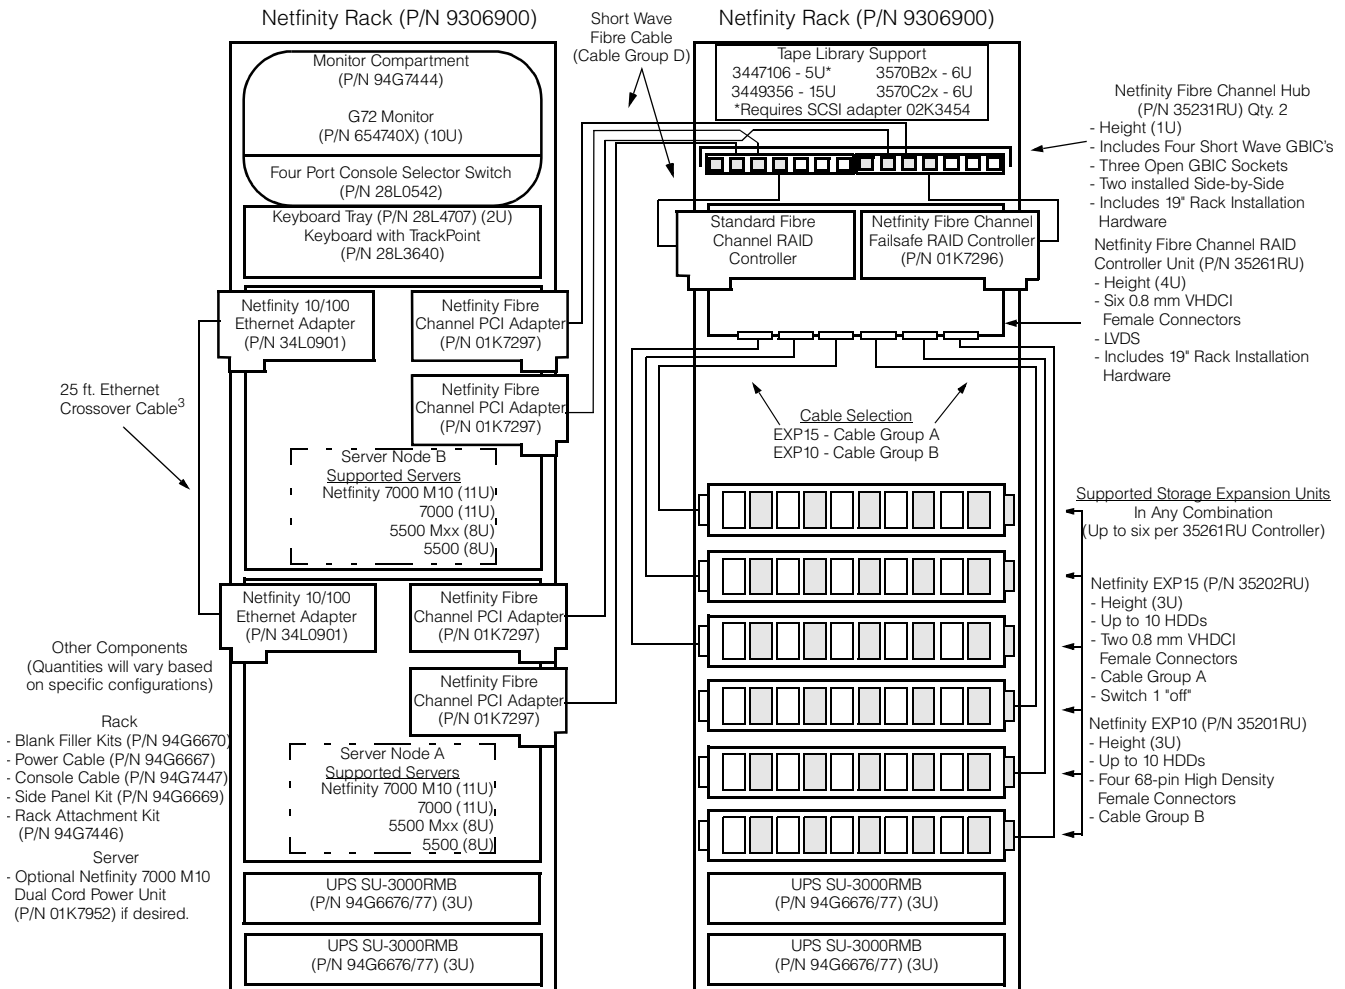


Additional Information and Configuration Tools Available
 Australia: <http://www.pc.ibm.com/au/configxpert/html>
 New Zealand: <http://www.pc.ibm.com/nz/configxpert/html>
 Singapore: <http://www.pc.ibm.com/sg/configxpert/html>
 ASEAN: <http://www.pc.ibm.com/asean/configxpert/html>

| | |
|--|---|
| Connector Types 68-pin - High Density Connector 0.8 mm - Very High Density Connection Interface VHDCI | Cable Group D (Short-Wave Fibre) 03K9306 - Netfinity Fibre Channel 5 M Cable 03K9305 - Netfinity Fibre Channel 25 M Cable Customer supplied short-wave cable of up to 500 meters (0.31 miles) |
| Cable Group A (0.8 mm to 0.8 mm) 03K9310 - Netfinity 2 M Ultra2 SCSI Cable 03K9311 - Netfinity 4.2 M Ultra2 SCSI Cable 03K9312 - Netfinity 12 M Ultra2 SCSI Cable | Cable Group E (Long-Wave Fibre) Customer supplied long-wave cable of up to 10 kilometers (6.2 miles) |
| Cable Group B (68-pin to 0.8 mm) 76H3589 - 1 M External .8mm SCSI Cable ¹ 01K8027 - 2 M External .8mm SCSI Cable 03K9352 - 3 M External Auto-Sensing Cable 01K8029 - 4.3 M External 0.8mm SCSI Cable | GBIC 03K9308 - Netfinity Fibre Channel Short-Wave GBIC ² 03K9307 - Netfinity Fibre Channel Long-Wave GBIC |
| | <ol style="list-style-type: none"> 1. Rack installation requires a minimum cable length of 2 meters. 2. Four Netfinity Fibre channel Short-Wave GBIC's (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU) 3. Microsoft Cluster Server (MSCS) requires a private interconnect between clustered nodes. A 25 ft. Ethernet crossover cable is shown but not available from IBM as a separate option. Contact your IBM Business Partner for assistance. |

Netfinity Fibre Channel Solution Six Node Oracle® Parallel Server (OPS)

The following sample configurations are for illustration only and may not be suitable for any specific customer installation. Contact your IBM Business Partner or IBM Marketing Representative for assistance with your specific configuration requirements.

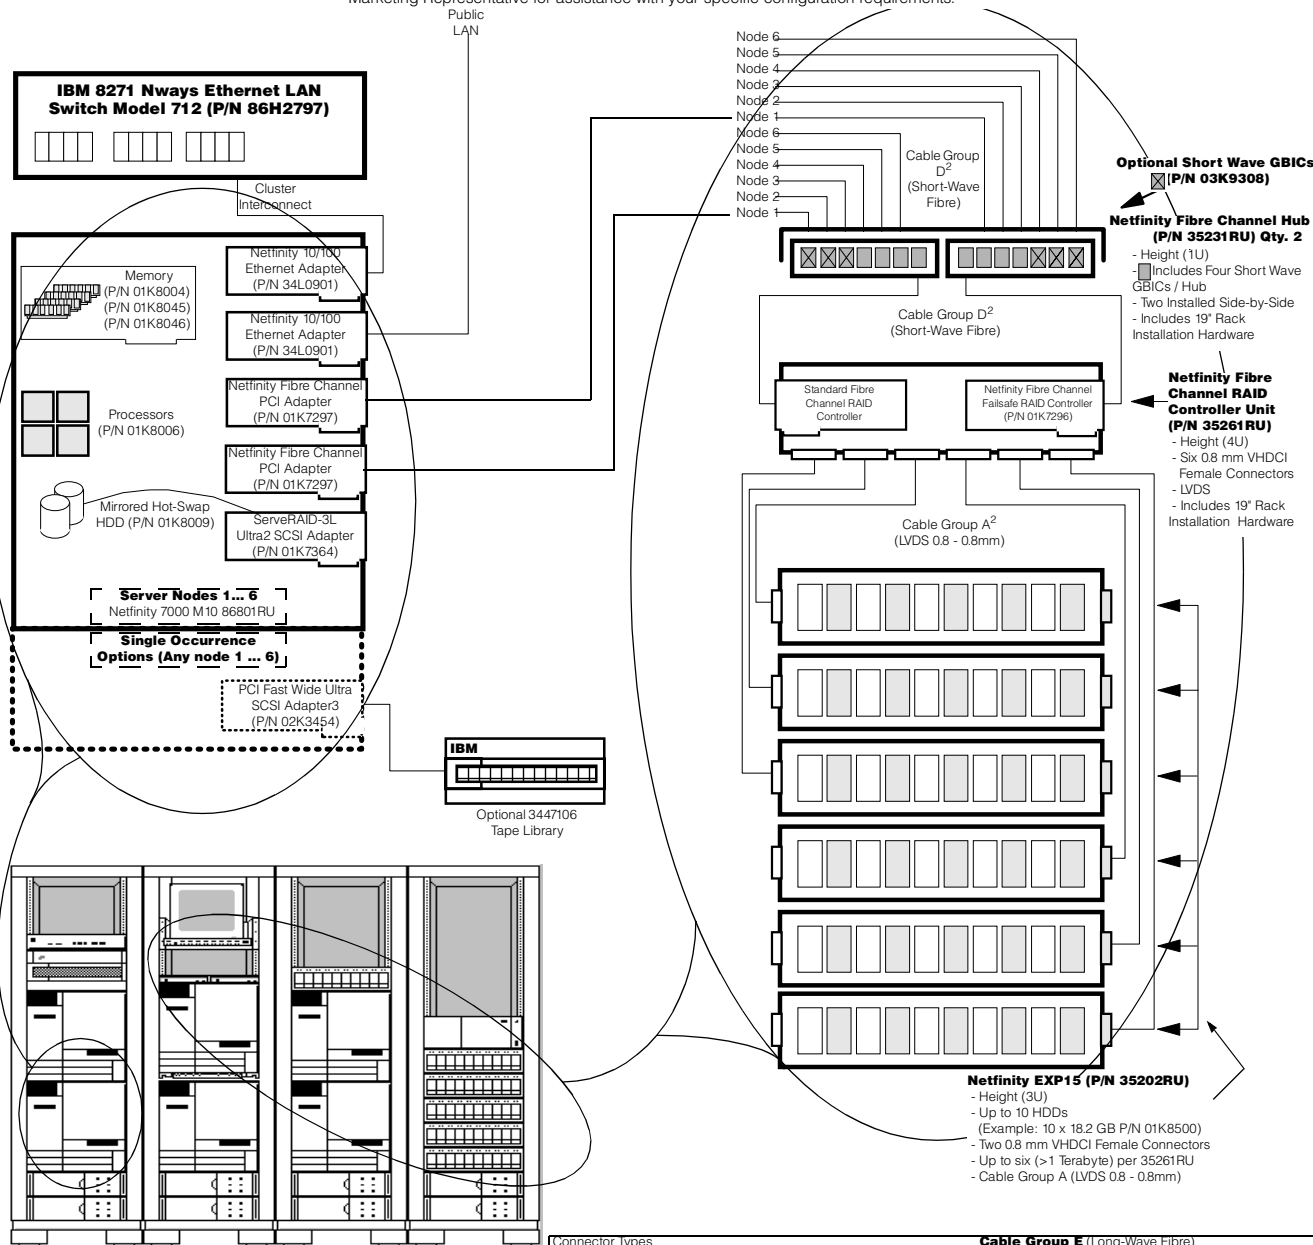

| Rack A | Rack B | Rack C | Rack D |
|----------------|----------------|----------|-----------------|
| 8271 Switch | Monitor | EXP15 | RAID Controller |
| 3447 Tape Lib. | Console Switch | EXP15 | EXP15 |
| 7000 M10 | 2 x Fibre Hub | 7000 M10 | EXP15 |
| 7000 M10 | 7000 M10 | 7000 M10 | EXP15 |
| 3000 UPS | Keyboard | 3000 UPS | EXP15 |
| 3000 UPS | 7000 M10 | 3000 UPS | EXP15 |
| | 3000 UPS | | 3000 UPS |
| | 3000 UPS | | 3000 UPS |

Connector Types
0.8 mm - Very High Density Connection Interface VHDCI

Cable Group A (0.8 mm to 0.8 mm)
03K9310 - Netfinity 2 M Ultra2 SCSI Cable
03K9311 - Netfinity 4.2 M Ultra2 SCSI Cable
03K9312 - Netfinity 12 M Ultra2 SCSI Cable

Cable Group D (Short-Wave Fibre)
03K9306 - Netfinity Fibre Channel 5 M Cable
03K9305 - Netfinity Fibre Channel 25 M Cable
Customer supplied short-wave cable of up to 500 meters (0.31 miles)

Additional Information and Configuration Tools Available
Rack Configurator: WEB URL <http://www.ibm.com/au/configxpert.html>
Paper Configurator: WEB URL <http://www.ibm.com/au/configxpert.html>
ConfigXpert: WEB URL <http://www.ibm.com/au/configxpert.html>

Cable Group E (Long-Wave Fibre)
Customer supplied long-wave cable of up to 10 kilometers (6.2 miles)

GBIC
03K9308 - Netfinity Fibre Channel Short-Wave GBIC¹
03K9307 - Netfinity Fibre Channel Long-Wave GBIC

(1) Four Netfinity Fibre Channel Short-Wave GBICs (P/N 03K9308) are included with Netfinity Fibre Channel Hub (P/N 35231RU)
(2) Cable length requirements are dependant on component placement within the rack suite. The parts list for this example reflects requirements for the illustrated configuration only. Cable length requirements for other configurations are best determined by using the Netfinity Rack Configurator which is downloadable from Web site WEB URL <http://www.ibm.com/au/configxpert.html>
(3) A tape library is optional and attaches to any one of the nodes within the cluster.



Netfinity Fibre Channel Solution


Six Node OPS Parts List¹

| Part Number | Description | Qty. | Usage |
|---------------------------|--|------|--|
| Nodes 1... 6 | | | |
| 86801RU | Netfinity 7000 M10 | 6 | Cluster Nodes |
| 01K8004 | Netfinity 7000 M10 Memory Expansion Card | 6 | 1 per node, required for memory installation in Banks 5... 8. Enables 8-way interleaving for supported configurations. |
| 01K8045 | Netfinity 7000 M10 512 MB Memory Expansion Kit - 4x128 | 24 | 4 per node, total of 4 GB |
| 01K8046 | Netfinity 7000 M10 1 GB Memory Expansion Kit - 4x256 | 12 | 2 per node, total of 4 GB |
| 01K8006 | Netfinity 7000 M10 400 MHzm, 512 KB Upgrade | 18 | 3 per node, total of 4 SMP processors per node |
| 01K8009 | IBM Netfinity 4.51 GB 10K Wide Ultra SCSI SCA-2 HDD | 12 | 2 per node, mirrored NOS, attached to ServeRAID-3L |
| 01K7364 | IBM Netfinity ServeRAID-3L Ultra2 SCSI Adapter | 6 | 1 per node for NOS HDDs |
| 34L0901 | Netfinity 10/100 Ethernet Adapter | 12 | 2 per node (1-Cluster Interconnect attachment to 8271 Switch, 1-Public LAN) |
| 01K7297 | Netfinity Fibre Channel PCI Adapter | 12 | 2 per node, each attaches to one of the two Fibre Hubs |
| 01K7951 | IBM Netfinity 400 W Hot-Swap Redundant Power Supply II | 12 | 2 per node, provides power supply redundancy for each node |
| 01K7952 | Netfinity 7000 M10 Dual Cord Power Unit | 6 | 1 per node, provides two power cables per node which are attached to separate UPS's allowing power source redundancy |
| Storage Subsystems | | | |
| 35231RU | Netfinity Fibre Channel Hub | 2 | Short-wave connection between each hub to each of 6 nodes, and two connections to Netfinity Fibre Channel RAID Controller Unit. Each hub includes 4 standard SW GBICs. |
| 03K9308 | Netfinity Fibre Channel Short-wave GBIC | 6 | 3 per hub, total of 7 per hub |
| 35261RU | Netfinity Fibre Channel RAID Controller Unit | 1 | Attaches to six EXP15's, with Failsafe Controller - two attachments to the hubs |
| 01K7296 | Netfinity Fibre Channel Failsafe RAID Controller | 1 | Installs in Controller Unit, provides redundant path to EXP15's |
| 35202RU | Netfinity EXP15 | 6 | One LVDS attachment to RAID Controller Unit per EXP15, max of 60 HDDs |
| 3447106 | 3447 Digital Linear Library | 1 | Tape subsystems are optional. The 3447 includes a 4.5 M cable. |
| 02K3454 | PCI Fast/Wide Ultra SCSI Adapter | 1 | Supports optional 3447 tape drive. May be installed in any of the 6 servers. |
| 94G6676/ 94G6677 | APC Smart-UPS 3000RMB | 8 | Power connections are intra-rack only ² |
| Storage Cables | | | |
| 03K9306 | Netfinity Fibre Channel 5 M Cable | 14 | 12 hub to node, 2 hub to RAID controller |
| 03K9310 | Netfinity 2 M Ultra2 SCSI Cable | 6 | RAID controller to EXP15's |
| Other Non-rack | | | |
| Customer Supplied | Ethernet Cluster Interconnect Cables | 6 | Not connected to Public LAN, provides interconnection between clustered nodes. |
| 28L3640 | Space Saver Keyboard (1U) | 1 | Includes TrackPoint |
| 65464AX | G54 Color Monitor 15" (13.7" Viewable Image Size) | 1 | - |
| 86H2797 | IBM 8271 Nways Ethernet LAN Switch Model 712 | 1 | Attaches to Cluster Interconnect Ethernet adapter in each node |
| Rack / Related | | | |
| 9306900 | IBM Netfinity Rack Cabinet | 4 | Provides 42U of mounting space per rack |
| 28L4707 | Netfinity Rack Keyboard Tray | 1 | Allows keyboard 28L3640 to be stored in a ready to use position |
| 85H6735 | Network Products Mounting Kit | 1 | Required for mounting 8271 switch in a Netfinity rack |
| 94G7444 | Monitor Compartment | 1 | Required for mounting G54 Monitor |
| 94G7445 | Console Server Selector Switch - 8 port | 1 | Connects 6 nodes to monitor and keyboard |
| 94G6669 | Side Panel Kit | 1 | Provides side panels for both ends of the rack suite. |
| 94G7446 | Rack Attachment Kit | 3 | Provides hardware for attaching four racks together in a suite |
| 94G6670 | Blank Filler Panel Kit | 4 | Provides blank panels to fill the remaining rack space within the suite |
| 94G6667/77 | Power Cable - Type A14 | 9 | Provides 14' power cables for UPS attachment to installed components |
| 94G7447 | 12ft. Console Cable Set | 6 | Attaches each node to the console switch. |

1. Cable, power, cooling and weight are dependent on component placement within the rack and rack suite. This parts list reflects one possible configuration of the listed components. Prior to ordering, you should configure your specific environment using the Netfinity Rack Configurator. The Netfinity Rack Configurator is downloadable from URL WEB URL <http://www.ibm.com/au/configxpert.html>


2. Pre-installation site planning information: 94G667/77 contains eight L5-30P, 120V 30 amp circuitry.

IBM Netfinity NetBAY3 Stackable Enclosure

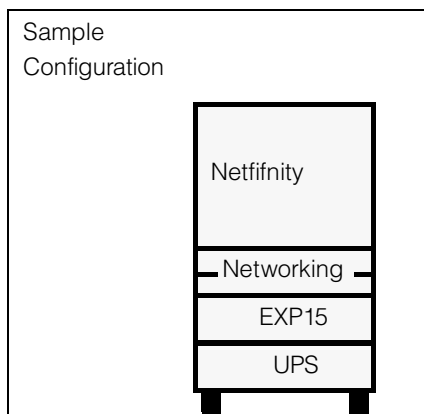

Installation Guidelines:

- 1) Locate power units with line cords in the bottom enclosure.
- 2) Install components starting from the bottom; start with the heaviest device.
- 3) If nothing is installed in the enclosure, attach the rear blank panel for stability.


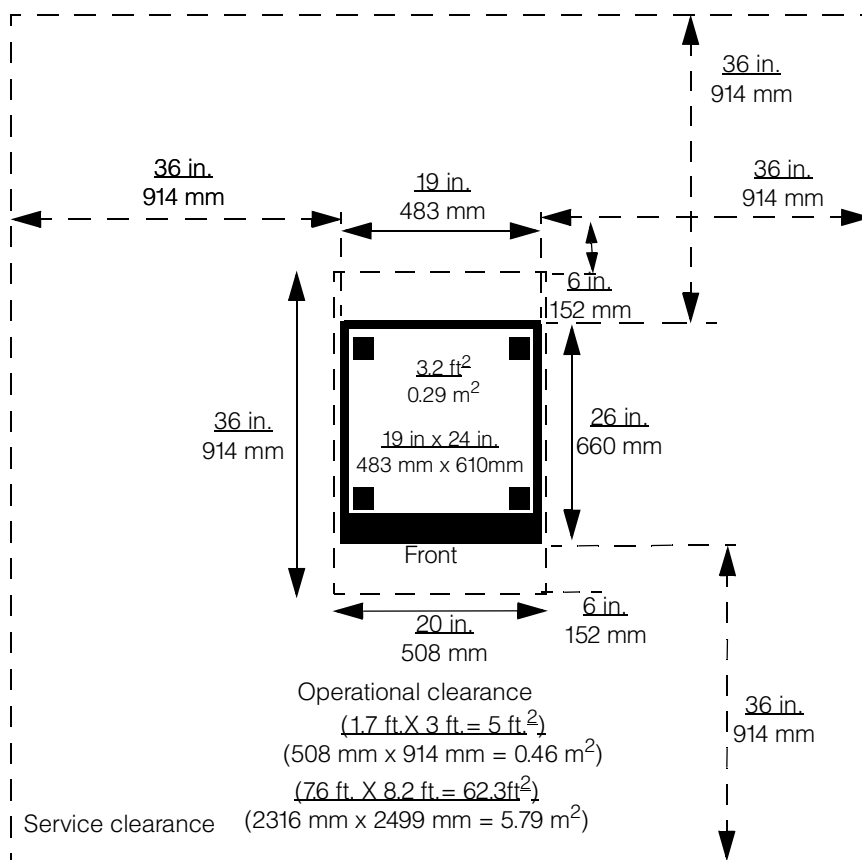


| Supported Devices | Size (U) | Weight(lb/kg) | Max/Enclosure | Max/Stack |
|---------------------------------|----------|---------------|---------------|-----------|
| Servers | | | | |
| Netfinity 7000 | - | 160/72.6 | n/a | 1 |
| Netfinity 7000-M10 ¹ | - | 160/72.6 | n/a | 1 |
| Netfinity 5500 | - | 120/54.4 | n/a | 1 |
| Netfinity 5500-M10 | - | 123.4/56.0 | n/a | 1 |
| Expansion | | | | |
| Netfinity EXP15 | 3 | 107/48.5 | 1 | 3 |
| IBM Tape Units | | | | |
| NetMEDIA 3551001 | 3 | 37/17 | 1 | 3 |
| Power | | | | |
| APC Smart-UPS 1400RMB | 3 | 55/24.9 | 1 | 1 |
| APC Smart-UPS 3000RMB | 3 | 112/50.8 | 1 | 1 |
| 100-120V PDU | 1 | 5/2.3 | 1 | 1 |
| 200-240V PDU | 1 | 8/3.6 | 1 | 1 |
| Networking | | | | |
| 2210 Multiprotocol Router | 1, 2 | 7/3.2, 20/9.1 | 3, 1 | 9, 3 |
| 8230 T-R Controlled Access Unit | 2 | 15/6.8 | 1 | 3 |
| 8235 Dial-in Access to LANs | 1 | 8/3.6 | 3 | 9 |
| 8237 Ethernet Hub | 2 | 10/4.5 | 1 | 3 |
| 8238 Nways T-R Hub | 2 | 11/5.0 | 1 | 3 |
| 8271 Ethernet Switch | 2 | 16/7.3 | 1 | 3 |
| 8272 T-R Switch | 2 | 16/7.3 | 1 | 3 |
| 8285 ATM Switch | 3 | 70/31.8 | 1 | 3 |
| Console | | | | |
| | - | 46/20.9 | n/a | 1 |

1. Netfinity 7000-M10 systems are rack mountable and ship without a keyboard. In order to be utilized with a NetBAY3 or in a tower configuration, optional Rack-to-Tower Kit (P/N 01K8005) must be installed.




IBM Netfinity NetBAY3 Stackable Enclosure

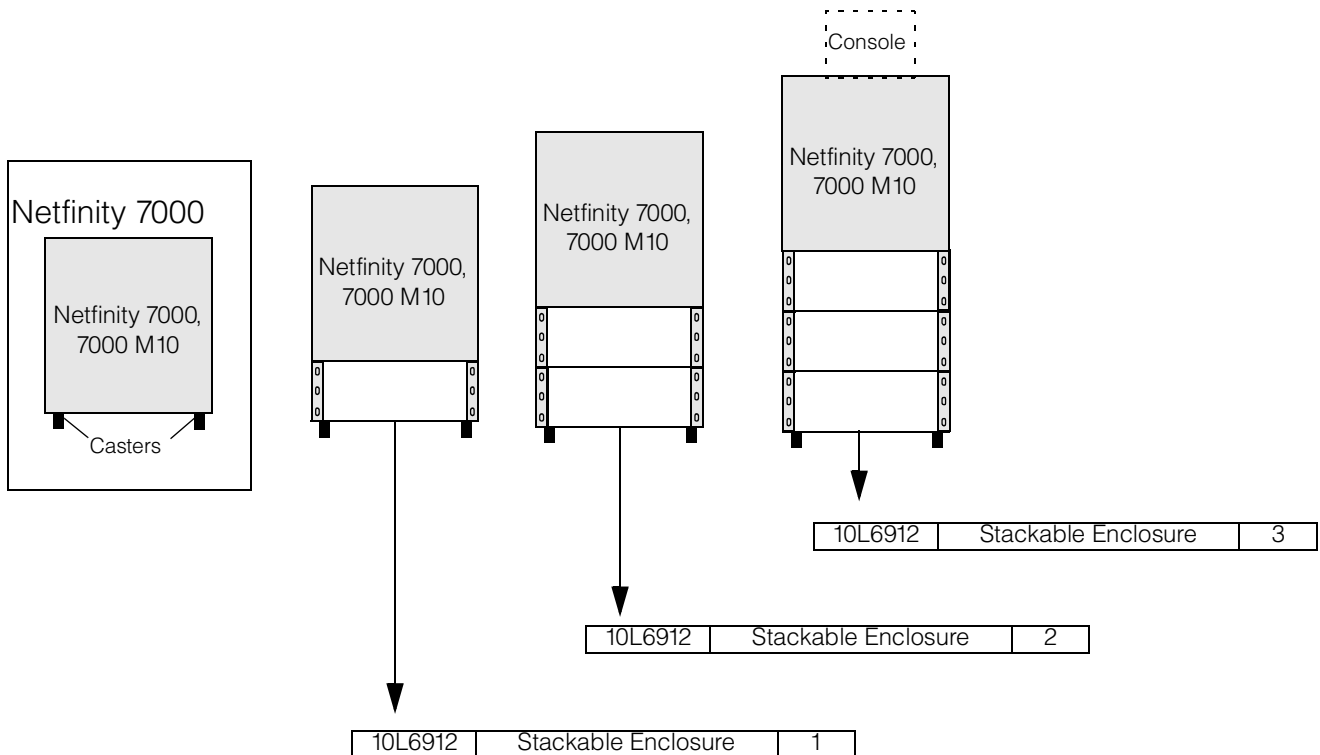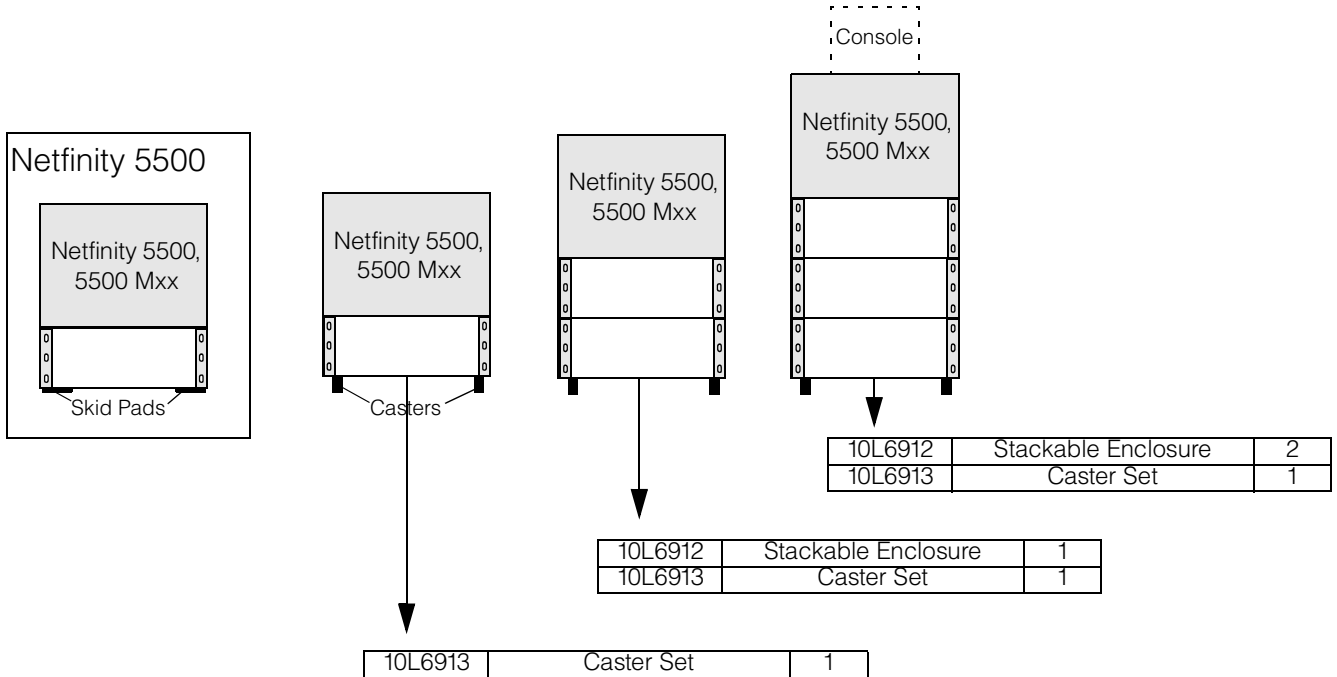

1. Netfinity 7000 M10 systems are rack mountable and ship without a keyboard. In order to be utilized with NetBAY3 or in a tower configuration, optional Rack-to-Tower Kit (P/N 01K8005) must be installed.

IBM Netfinity Rack Cabinet and Options

Note: For a robust rack configurator application access: WEB URL <http://www.ibm.com/au/configxpert.html>

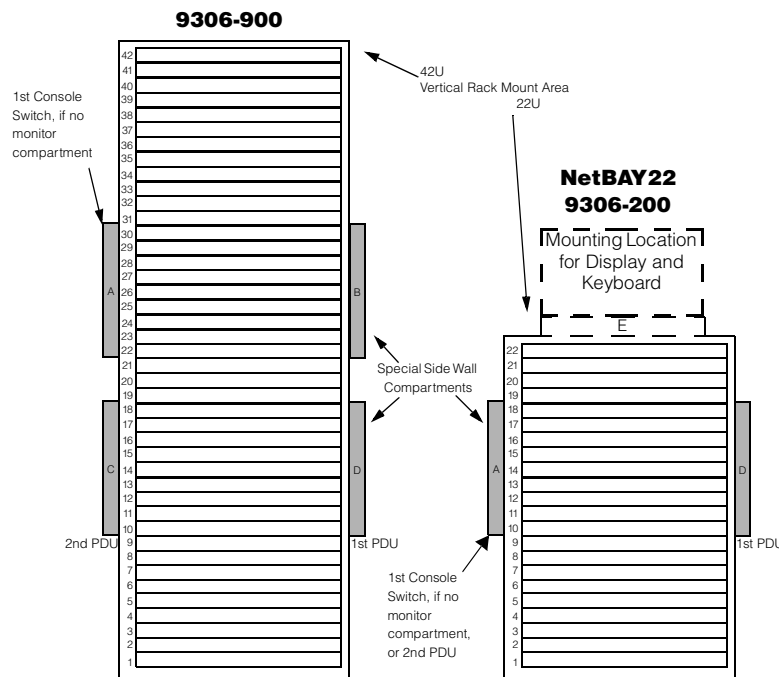

| Direct Rack Mount ¹ : Units Supported | | |
|--|-------------|-----|
| IBM Servers | | |
| Netfinity 5000 | Rack Models | 5U |
| Netfinity 5500, 5500 Mxx | Rack Models | 8U |
| Netfinity 7000, 7000 M10 | Rack Models | 11U |
| IBM Storage Expansion Units | | |
| Netfinity EXP15 | 3520-2Rx | 3U |
| IBM 7133 Serial Disk System ^{2, 3} | 7133-020 | 4U |
| IBM Tape Units | | |
| NetMEDIA | 3551001 | 3U |
| Magstar MP 3570 | 3570B21/B22 | 6U |
| Magstar MP 3570 | 3570C21/C22 | 6U |
| DLT Tape Library | 3447-106 | 5U |
| 8mm Tape Library | 3449-356 | 15U |
| IBM Networking Products | | |
| Dial-in Access to LANS | 8235-03x | 1U |

1. Mounting hardware provided with product
2. Requires Rail Kit (FC 3093). 208V Power cord included, optional 110V power cord (FC 9886/1.8M or FC 9800/2.8M) can be ordered. If the Black Cover Kit (FC 3020) is ordered, no white cover is shipped with system. Other specify codes may be required.
3. The 7133 Serial Disk System is not a IBM Personal Systems Group product. For further information, contact your IBM Business Partner or IBM Marketing Representative

Optional Accessories

| Mounting Support | Part Number | Rack Space | Units Supported |
|---|---------------------------------|--|---|
| Fixed Shelf: width x depth= (439 mm x 663mm) 17.3 in. x 26.1 in max. weight= (45 kg)100lbs. | 94G7442 | 2 to xx U | <u>IBM Networking Products</u> 8222-008, 016 Nways Enet Wkgrp Hub 2U 8225-003 Ethernet Hub 2U |
| Slide Shelf | 94G5461 | 12 to 15 U | <u>IBM Servers (towers)</u> <u>Mounting Plate</u> PC Server 300, 320, 330 94G4996 15U PC Server 325 94G4996 12U PC Server 500, 520, 720 94G4997 15U 3518 Enterprise Expansion Encl. 94G4997 15U PS/2 Server 85,95 94G4995 13U |
| Network Products Mounting Kit | 85H6735 | 1 to 5 U | <u>IBM Networking Products</u> Ethernet Switch 8271-108, 216 2U Ethernet Hub 8237-00x 2U Token-Ring Switch 8272-108 2U Token-Ring Controlled Access Unit8230-04A, 04P 2U Nways LAN Switch 8270-800 5U Nways Token-Ring Hub 8238-xx1 2U ATM Switch 8285-00B, 00E 3U Multi-Protocol Router 2210-12x 1U Multi-Protocol Router 2210-x4x 2U |
| Console Support | Part Number | Rack Space | Devices Supported |
| Monitor compartment supports one monitor, and one Console Server Selector Switch | 94G7444 | 4 to 10 U | <u>IBM Monitors</u> 4707-E01 (6U) G40, G41 (9U) G50, G51, G52, P50 (9U) G70, G72, P70 (10U) |
| Keyboard tray supports one keyboard, and one mouse or Trackpoint | 28L4707 ² 94G7443 | 1 to 2 U (dependent on keyboard height) | <u>IBM Keyboards/Mouse¹</u> 104 key black keyboard 76H0109 (1U) 101 key black TrackPoint II 13H6705 (2U) 84 key black Space Saver w/TP 28L3640 (1U) Black/Sleek Mouse 12J3615 (1U) |
| Console Server Selector Switch (8-port) Netfinity Console Selector Switch (4-port) | 94G7445 28L0542 | - | <u>Mounts</u> 1) behind monitor compartment or 2) in rack side wall A, B |
| Console Cable Set- (366 m) 12 ft. | 94G7447 | - | Connect servers/switches to primary switch |

1. Many tower models of Netfinity and PC Servers include a keyboard. These keyboards are supported by rack tray 94G7443 and console selector switches.
2. Space Saver Keyboard (P/N 28L3640) can be stored in a "ready-to-use" position.

| Power Support | Part Number | Rack Space | Comments |
|--------------------------------------|-------------|------------|--|
| 100-120V 12a Power Distribution Unit | 94G6666 | -- | 8 NEMA 5-15R outlets Mounts in rack side wall D,C |
| 200-240V 16a Power Distribution Unit | 94G7450 | -- | 10 IEC 320-C13 outlets Mounts in rack side wall D,C |

For more information on PC Products, visit the PC Company World Wide Web site.
Asia Pacific:<http://www.pc.com/ap>




| | | | | |
|---|--------------------|---------------------|--|---|
| 1400VA UPS 120V 220-240V | US/C/LA EMEA/AP | 94G6674 94G6675 | 3U | 6 NEMA 5-15R outlets 4 IEC 320-C13 outlets |
| 3000VA UPS 120V 120-240V | US/C/LA EMEA/AP | 94G6676 94G6677 | 3U | 8 NEMA 5-15R outlets 8 IEC 320-C13 and 1 C19 |
| Power Cables Type Connectors | | | | Length |
| A14 IEC 320-C13 to NEMA 5-15P | | 94G6667 | - | (4.27 m) 14 ft. |
| B14 IEC 320-C19 to NEMA 5-15P | | 94G6668 | - | (4.27 m) 14 ft. |
| C12 IEC 320-C13 to IEC 320-C14 | | 94G7448 | - | (3.66 m) 12 ft. |
| D12 IEC 320-C19 to IEC 320-C14 | | 94G7449 | - | (3.66 m) 12 ft. |
| Miscellaneous | Part Number | Rack Space | Comments | |
| Blank Filler Panel Kit 1U panel (qty. = 2) 3U panel (qty. = 1) 5U panel (qty. = 1) | 94G6670 | 1U + 1U 3U 5U | Use as required to fill empty space in the vertical rack mount area. | |


Note: You can select up to two power units per rack. Select the optional Power Cables when the standard cable is not long enough or has incompatible power plug.

9306-900 Single Cabinet or Multi-Rack Suite Options


**Single Stand-alone
IBM Netfinity Rack Cabinet**

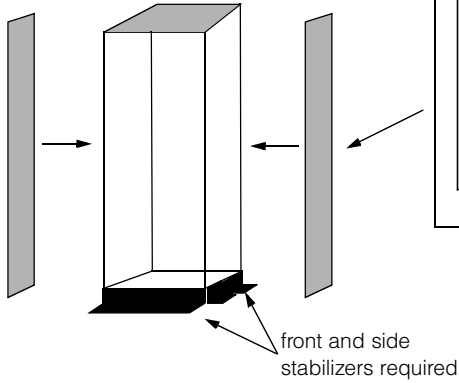


Side Panel Kit (94G6669)¹

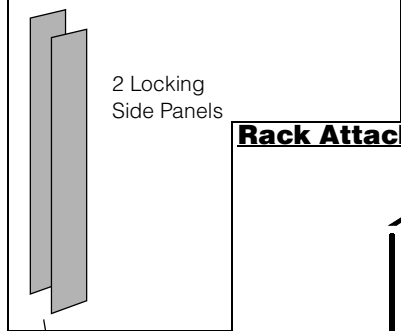

Rack Attachment Kit (94G7446)¹

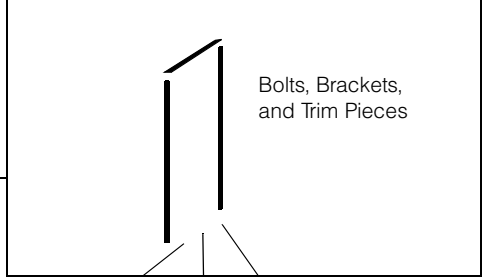



Multi-Rack Suites -- 2 to 8 racks

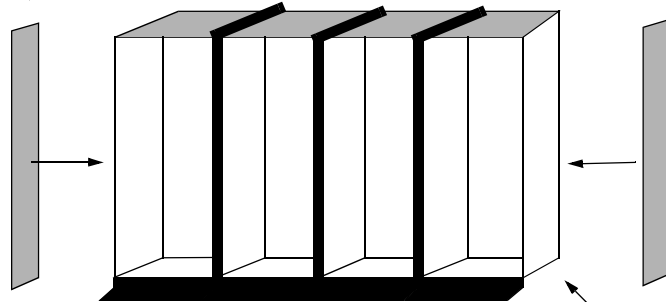

1. Supported on 9306-900 only.



IBM Netfinity Rack - Cabinet and Options Dimensions

9306-900 and NetBAY22 (9306-200)

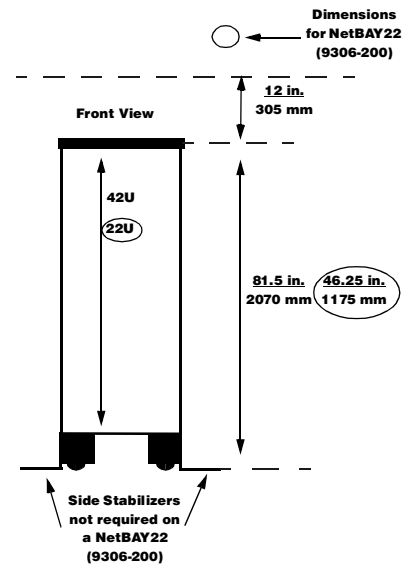
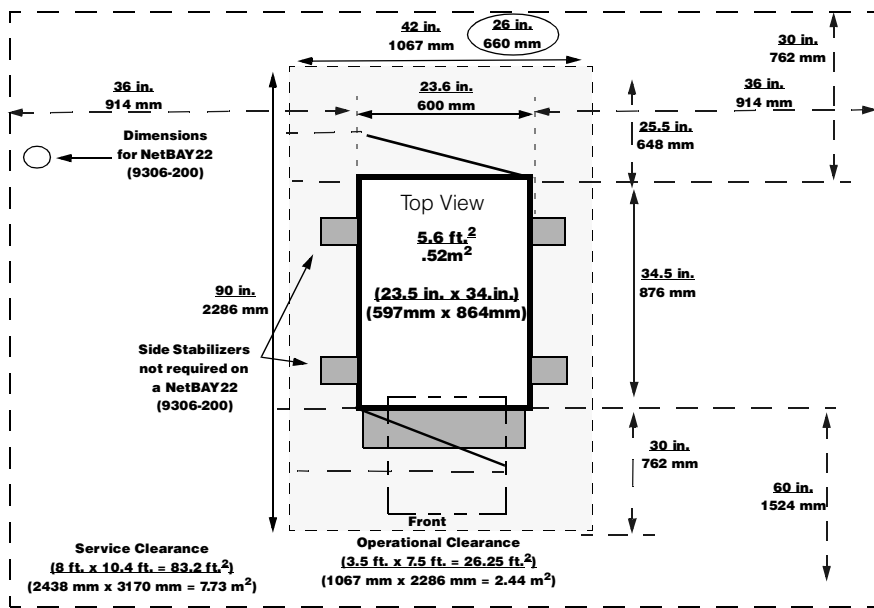


| Weight (lb/kg) | 9306-900 | | 9306-200 |
|----------------|------------|------------|------------------------|
| | Moveable | Stationary | Moveable or Stationary |
| Empty rack | 276/125.2 | 276/125.2 | 182/82.6 |
| Max load | 824/373.8 | 1424/645.9 | 746/338.4 |
| Total | 1100/499.0 | 1700/771.1 | 928/421.0 |

EIA 310-D standard 19-inch, type A cabinet
1U = (44.45 mm) 1.75 inches

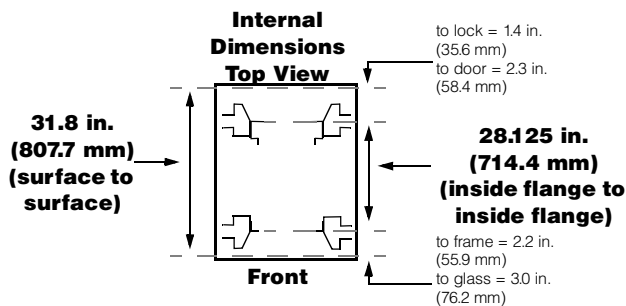

Switch Arrangements

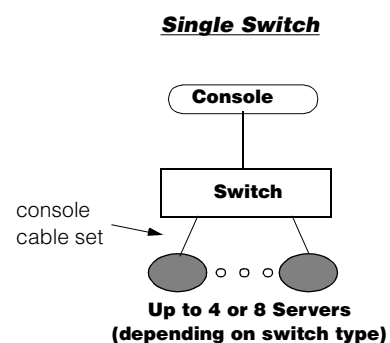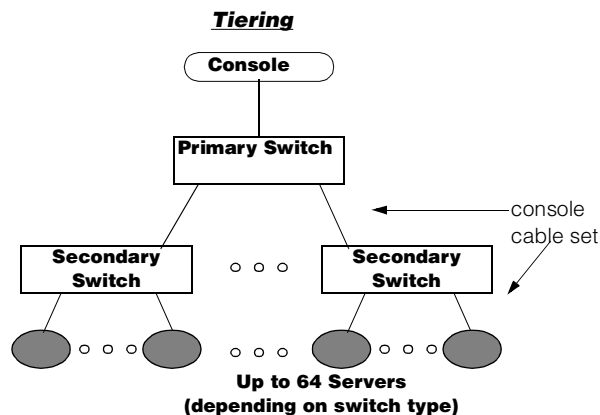



Appendix A: Tape Drive Attributes

| Part Number | Description | SCSI Interface | | | | | | | | | | |
|---|--|----------------|----------------------|-------------------|-----------------|----------------------|------------------------|-------------------|---------------------------|-----------------|-------------------|--------------------------------|
| | | Bays Supported | SCSI Interface (bit) | Form Factor | Bezel - (B)Rack | Max GB-Native/Compr. | MB/sec - Native/Compr. | Termination Incl. | 68/50-pin Converter Incl. | Internal Cables | Data Cartridges 1 | Ext. Tape Enclosures 2 |
| 01K1282 | IBM 12/24GB DDS/3 4mm Internal Tape Drive | - | 8 | 3.5"HH or 5.25"HH | B/W | 12/24 | 1.1/2.2 | Y ⁹ | Y | - | 1 | 3510020 |
| 06H9716 | IBM 4/8GB TR4 Internal SCSI Tape Drive ³ | - | 8 | 3.5"SL or 5.25"HH | B/W | 4/8 | 0.5/1 | Y ⁹ | N | - | 1 | 3510020 |
| 01K1319 | IBM 10/20GB NS Internal SCSI Tape Drive | - | 8 | 3.5"SL or 5.25"HH | B/W | 10/20 | 1/2 | Y ⁹ | Y | - | 1 | 3510020, 3551001 |
| 01K1325 | IBM 20/40GB 8mm SCSI Tape Drive | - | 16 | 5.25"HH | B | 20/40 | 3/6 | N ¹⁰ | - | - | 1 | 3510020 ⁴ |
| 01K1320 | IBM 20/40GB DLT SCSI Tape Drive | - | 8 | 5.25"FH | B | 20/40 | 1.5/3 | Y ⁸ | Y | 16-bit, 4 drop | 1 | 3503BOX ⁴ , 3551001 |
| 04K0149 | IBM 35/70GB DLT SCSI Tape Drive | - | 16 | 5.25"FH | B | 35/70 | 5/10 | N ¹⁰ | - | 16-bit, 4 drop | 1 | 3503BOX ⁴ , 3551001 |
| Associated Options | | | | | | | | | | | | |
| 32G3918 | SCSI-2 16-bit Active Terminator | - | 16 | Ext. | - | - | - | - | - | - | - | 3510020, 3503BOX |
| 94G7587 | PC Server SCSI Terminator Kit | - | 8/16 | Int. | - | - | - | Y | - | - | - | - |
| 32G3925 | SCSI 68-pin to 50-pin Converter | - | 8/16 | Int. | - | - | - | - | Y | - | - | 3551001 |
| 36L9636 | Netfinity Two-Drop Internal SCSI Cable ¹¹ | - | 16 | Int. | - | - | - | Y | - | - | - | - |
| External Tape Enclosures | | | | | | | | | | | | |
| 3510020 | External Half High SCSI Storage Enclosure ⁵ | - | 8/16 | Desktop | B | | | | | | | |
| 3551001 | IBM NetMEDIA Storage Expansion Unit EL ⁶ | - | 16 | Rack | B | | | | | | | |
| 3503BOX | IBM DLT External SCSI Enclosure ⁷ | - | 16 | Desktop | B | | | | | | | |
| External Tape Libraries¹² | | | | | | | | | | | | |
| 3447xxx | 3447 Digital Tape Library (desktop-105, rack-106) | - | 16 | Desktop or Rack | B | | | | | | | |
| 3449xxx | 3449 8mm Tape Library (desktop-355, rack-356) | - | Diff. | Deskside or Rack | B | | | | | | | |
| 3570xxx | Magstar MP 3570 Tape Subsystem (models B2x and C2x) | - | Diff. | Rack | B | | | | | | | |

1. One cleaning and one data cartridge ship with each tape unit.
 2. To determine cable requirements, note the tape drive's SCSI interface, the appropriate SCSI controller from the system configurator section and the desired enclosure then refer to Appendix D: Cables-Storage Units-Controllers.
 3. SCSI 68-pin to 50-pin Converter (P/N 32G3925) is required.
 4. Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
 5. Provides a black desktop 5.25" half-high (HH) tape enclosure. Connector is configurable as 50-pin Centronix or 68-pin high density. Requires either tape drive self termination or SCSI-2 16-bit Active Termination (P/N 32G3918).
 6. Provides a black 3U, 19" rack or NetBAY3 mountable tape enclosure. Provides two full high (FH) or four half-high (HH) extended length 5.25" bays. External connector is 0.8mm VHDCI.
 7. Provides a black desktop DLT tape enclosure. External connector is 68-pin high density. Requires SCSI-2 16-bit Active Termination (P/N 32G3918).
 8. A 16-bit terminator is included for attachment to an internal cable.
 9. Tape Drive is capable of self termination.
 10. If installed as the last or only device on a SCSI cable, termination is required. Check system unit SCSI cabling to assure termination is included. Where internal termination is not included, PC Server SCSI Terminator Kit (P/N 94G7587) should be used.
 11. Netfinity Two-Drop Internal SCSI Cable (P/N 36L9636) is a wide two-drop terminated cable and is required for attachment of internal tape drives to the onboard SCSI controller of a Netfinity 5000 when the hot-swap backplane is attached to a RAID Controller.
 12. Tape library attributes and prerequisites are located in Appendix B: Tape Library Attributes
 Note: SCSI support for tape drives is provided by system unit onboard (standard) controller (no-RAID function) or PCI Fast Wide Ultra SCSI Adapter P/N 02K3454.

Appendix B: Tape Library Attributes

| Part Number | Description | SCSI Interface | | Form Factor | Bezel - (B)lack | External Terminator Incl. | External Cables Incl. (m) | SCSI Controllers Incl. | Data Cartridges - 1 std./max | Cartridge Mags std./max | Qty. of drives - std./max | Max GB-Native/Compressed | MB/sec - Native/comp. |
|-------------|--|----------------|-------------|-------------|-----------------|---------------------------|---------------------------|------------------------|------------------------------|-------------------------|---------------------------|--------------------------|-----------------------|
| | | SCSI Interface | Form Factor | | | | | | | | | | |
| 3447105 | 3447 Digital Linear Library Desktop ¹² | F 68 | Desktop | B | Y | M68-M68, 4.5 m | N ³ | 1/15 | 1 | 1/2 | 525/1050 | 5/10 | |
| 3447106 | 3447 Digital Linear Library Rack Mountable ¹² | F 68 | 5U Rack | B | Y | M68-M68, 4.5 m | N ³ | 1/15 | 1 | 1/2 | 525/1050 | 5/10 | |
| 59H3569 | 3447 Second Digital Linear Tape Drive Kit ⁴ | F 68 | - | - | N ¹² | 0.4 m ^{4, 12} | N ¹² | - | - | - | - | 5/10 | |
| 59H3558 | 3447 10-Cartridge Media Magazine | - | - | - | - | - | - | - | - | - | - | - | |
| 3449355 | 3449 8mm Tape Library Desktop ⁵ | Diff | desktop | B | Y | 4.5 m | Y | 1/20 | 2 | 1/2 | 440/880 | 3/6 | |
| 3449356 | 3449 8mm Tape Library Rack Mountable ⁶ | Diff | 15U Rack | B | Y | 4.5 m | Y | 1/20 | 2 | 1/2 | 440/880 | 3/6 | |
| 59H3391 | 3449 Second 20 GB Drive ⁵ | Diff | - | - | - | - | - | - | - | - | - | 3/6 | |
| 59H3900 | 3449 Adapter Card ⁶ | Diff | - | - | Y | 4.5 m | Y | - | - | - | - | - | |
| 87G1728 | 3449 10-Cartridge Media Magazine | - | - | - | - | - | - | - | - | - | - | - | |
| 3570B21 | Magstar MP 3570 Tape Subsystem ⁷ | Diff | 6U Rack | B | Y | 4.5 m | Y | 1/20 | 2 | 1/2 | 100/300 | 2.2/6.6 | |
| 3570B22 | Magstar MP 3570 Tape Subsystem ⁷ | Diff | 6U Rack | B | Y | 4.5 m | Y | 1/20 | 2 | 2/2 ⁸ | 100/300 | 2.2/6.6 | |
| 3570C21 | Magstar MP 3570 Tape Subsystem ⁷ | Diff | 6U Rack | B | Y | 4.5 m | Y | 1/20 | 2 | 1/2 | 100/300 | 70/15.0 | |
| 3570C22 | Magstar MP 3570 Tape Subsystem ⁷ | Diff | 6U Rack | B | Y | 4.5 m | Y | 1/20 | 2 | 2/2 ⁸ | 100/300 | 70/15.0 | |
| 08L6517 | 3570 Adapter Card Kit ¹³ | Diff | - | - | Y | 4.5 m | Y | - | - | - | - | - | |
| 08L6516 | Second "B" Drive for B21 ⁹ | Diff | - | - | - | - | N | - | - | 1 | - | 2.2/6.6 | |
| 08L6480 | Second "C" Drive for C21 ⁹ | Diff | - | - | - | - | N | - | - | 1 | - | 70/15.0 | |
| | Magstar MP Media¹⁰ | | | | | | | | | | | | |
| 05H2462 | Magstar MP Fast Access Linear Tape Cartridge, B-format ¹¹ | - | - | - | - | - | - | - | - | - | - | - | |
| 05H2463 | Magstar MP Cleaning Cartridge | - | - | - | - | - | - | - | - | - | - | - | |
| 08L6187 | Magstar MP Fast Access Linear Tape Cartridge, C-format | - | - | - | - | - | - | - | - | - | - | - | |

- One cleaning and one data cartridge ship with each tape unit.
- Transfer rates are for single SCSI Channel configurations. Tape Libraries utilizing split library or dual host configurations may obtain higher rates.
- Requires Ultra SCSI adapter P/N 02K3454
- Includes a 0.4 m SCSI cable for daisy-chaining to the initial drive.
- No additional cables are required if daisy-chaining to the initial drive.
- Dual Host or Split Library operation requires 3449 Second 20GB Drive (P/N 59H3391) and 3449 Adapter Card (P/N 59H3900) which includes appropriate adapters, cables and terminators.
- Include rack mounting hardware and two power cords (120 V and 250 V). Models B22 and C22 include an additional 2 power cords.
- The two tape drives are daisy-chained on the same SCSI bus with an included 0.5 meter SCSI cable. Dual Host and Split Library configurations require 3570 Adapter Card Kit (P/N 08L6517)
- Required for either dual host or split library operation. Should be installed by qualified service personnel.
- Magstar MP Media can be ordered by calling 888-IBM-MEDIA or 888-426-6334 in the US, Canada, or Puerto Rico.
- B-format tape cartridges can be used in either Magstar MP 3570 Model B or C tape drives.
- Split Mode operation requires 3447 Second Digital Linear Tape Drive Kit (P/N 59H3569), SCSI-2 16-bit Active Terminator (P/N 32G3918), PC Server 30M SCSI-2 F/W Cable (P/N 94G5567), or PC Server 4.3M SCSI-2 F/W Rack Cable (P/N 94G5566), and a second Ultra SCSI adapter (P/N 02K3454). Split mode operation is limited to AUTOLOADER MODE ONLY which processes the cartridges sequentially.
- Required for Dual Host or Split Library configurations with 3570B2x or 3570C2x containing two drives.

Appendix C: UPS Runtime Estimate (minutes)



| Servers | # Pwr. Cords Std/Max | VA Load Max./Typ. ¹ | Watts Load Max./Typ. ¹ | Tower | | | | Rack Mount | | |
|--|-------------------------|-----------------------------------|--------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|------------------------|
| | | | | International Part Number | SU-700iNET 94G4073 | SU-1000iNet 94G4074 | SU-1400iNET 94G4075 | SU-2200iNET 94G4076 | SU-1400RMiB 94G6675 | SU-3000RMiB 94G6677 |
| | | | | United States Part Number | SU-700NET 94G3134 | SU-1000NET 94G3135 | SU-1400NET 94G3136 | Not Available | SU-1400RMB 94G6674 | SU-3000RMB 94G6676 |
| | | | | minimum/ typical ⁴ | minimum/ typical ⁴ | minimum/ typical ⁴ | minimum/ typical ⁴ | minimum/ typical ⁴ | minimum/ typical ⁴ | |
| Netfinity 3000 ² | 1/1 | 225/160 | 225/160 | 22/32 | 36/51 | 57/80 | 114/156 | - | - | |
| Netfinity 3500 | 1/1 | 380/265 | 265/190 | 15/25 | 26/42 | 40/68 | 98/134 | - | - | |
| Netfinity 5000 ² | 1/2 | 475/330 | 475/330 | - | 12/19 | 20/30 | 47/76 | 15/23 | 42/62 | |
| Netfinity 5500 ² | 1/2 | 540/375 | 540/375 | - | - | 16/26 | 38/63 | 12/21 | 35/55 | |
| Netfinity 5500 M10 ² | 1/2 | 540/375 | 540/375 | - | - | 16/26 | 38/63 | 12/21 | 35/55 | |
| Netfinity 7000 M10 ² | 1/2 | 745/525 | 745/525 | - | - | 12/17 | 26/40 | 8/12 | 26/35 | |
| Other Devices | | | | | | | | | | |
| 3517 SCSI Multi Storage Enclosure | 1/1 | 190/135 | 135/100 | 38/55 | 58/75 | 90/118 | 180/225 | - | - | |
| 3518 Enterprise Expansion Enclosure | 1/1 | 700/500 | 500/350 | - | 11/18 | 18/28 | 43/71 | 13/21 | 41/67 | |
| Netfinity EXP 15 (3520) ² | 2/2 | 400/280 | 400/280 | - | - | - | - | 18/27 | 57/84 | |
| SSA Entry Storage Subsystem for PC Servers (3527) ² | 1/1 | 300/210 | 300/210 | 12/20 | 22/36 | 34/57 | 85/121 | - | - | |
| 3447 Digital Linear Tape Library | 1/1 | 200/140 | 100/70 | 38/55 | 58/75 | 90/118 | 170/220 | 66/91 | 152/183 | |
| 3449 8mm Tape Library | 1/1 | 320/225 | 288/200 | 14/22 | 24/38 | 37/60 | 112/156 | 25/44 | 84/116 | |
| Netfinity Fibre Channel RAID Controller Unit (3526) ² | 2/2 | 160/105 | 160/105 | - | - | - | - | 60/91 | 140/183 | |
| UPS Attributes | | | | | | | | | | |
| Communication Links to Servers | - | - | - | 1 | 1 | 1 | 1 | 1 | 3 | |
| Color | - | - | - | black ³ | black ³ | black ³ | white | black | black | |
| EIA Height | - | - | - | - | - | - | - | 3U | 3U | |
| International Models | | | | | | | | | | |
| Receptacles (IEC 320-C13, C19) | - | - | - | 4 | 4 | 4 | 8, 1 | 4 | 8, 1 | |
| Live Cord Receptacle (IEC 320-) | - | - | - | C14 | C14 | C20 | C20 | C14 | C20 | |
| US Models | | | | | | | | | | |
| Receptacles (NEMA 5-15R) | - | - | - | 4 | 6 | 6 | - | 6 | 8 | |
| Line Cord Length, Plug | - | - | - | 6 ft., 5-15P | 6 ft., 5-15P | 6 ft., 5-15P | - | 6 ft., L5-15P | 6 ft., L5-30P | |

1. This table represents general guidelines for selecting the appropriate UPS based on minimum and typical runtime estimates. A 'maximum configuration' load will result in 'minimum' UPS runtime. 'Typical' loads are based on a production system running at approximately 70% of maximum capacity. The 'typical' loads represent a more likely configuration and, therefore, a more likely estimate of runtime. Customer environments are unique and are unlikely to be precisely represented by any of the specific entries in the table.

2. Power-Factor Corrected (PFC) power supply. Runtime estimates have been adjusted accordingly.

3. Early versions were white. US versions currently shipping in cartons clearly marked as "black". International version will be black by end of 1Q99.

4. Data provided by APC.

Note: For runtime estimates of multiple components attached to a single UPS, add the number of Watts for all selected components. Use the total Wattage and Total Configuration Runtime Estimator to determine which UPS provides an acceptable duration of estimated runtime.

| Total Configuration Runtime Estimator (Time in minutes) ¹ | | | | | | | | | |
|--|-----------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-----------------------|-----------------------|
| Total Configuration Load (Watts) | Tower | | | | | | Rack Mount | | |
| | SU-700iNET 94G4073 | SU-1000iNET 94G4074 | SU-1000iNET 94G3135 | SU-1400iNET 94G4075 | SU-2200iNET 94G4076 | SU-3000RMiB 94G6677 | SU-1400RMiB 94G6675 | SU-1400RMB 94G6674 | SU-3000RMB 94G6676 |
| | | | | | Not Available | | | | |
| 200 | 22 | 38 | | 62 | 130 | | 45 | | 104 |
| 250 | 17 | 28 | | 43 | 104 | | 34 | | 84 |
| 300 | 12 | 22 | | 34 | 85 | | 25 | | 70 |
| 350 | 9 | 18 | | 29 | 71 | | 22 | | 58 |
| 400 | 7 | 14 | | 23 | 65 | | 18 | | 52 |
| 450 | 5 | 12 | | 20 | 52 | | 15 | | 45 |
| 500 | - | 11 | | 18 | 43 | | 13 | | 38 |
| 550 | - | 9 | | 16 | 38 | | 11 | | 35 |
| 600 | - | 8 | | 13 | 34 | | 10 | | 31 |
| 650 | - | 7 | | 12 | 31 | | 9 | | 29 |
| 700 | - | 6 | | 11 | 28 | | 8 | | 26 |
| 750 | - | - | | 10 | 25 | | 8 | | 24 |
| 800 | - | - | | 9 | 23 | | 7 | | 22 |
| 850 | - | - | | 8 | 21 | | 7 | | 20 |
| 900 | - | - | | 7 | 19 | | 6 | | 18 |
| 950 | - | - | | 6 | 18 | | 5 | | 17 |
| 1000 | - | - | | - | 17 | | - | | 16 |
| 1050 | - | - | | - | 16 | | - | | 15 |
| 1100 | - | - | | - | 15 | | - | | 14 |
| 1150 | - | - | | - | 14 | | - | | 13 |
| 1200 | - | - | | - | 13 | | - | | 12 |
| 1250 | - | - | | - | 12 | | - | | 11 |
| 1300 | - | - | | - | 11 | | - | | 10 |
| 1350 | - | - | | - | 10 | | - | | 9 |
| 1400 | - | - | | - | 10 | | - | | 9 |
| 1450 | - | - | | - | 9 | | - | | 8 |
| 1500 | - | - | | - | 9 | | - | | 8 |

1. Data provided by APC.

Step:

1. Identify the devices contained in the configuration.
2. Sum the load of all devices in the configuration. Use either Maximum Load for minimum runtime, or Typical Load for typical runtime.
3. Find the Total Configuration Load in the table above.
4. Select the most appropriate UPS model to achieve the desired runtime.

NOTE: If the Total Configuration Load is greater than the entries above, split the load across two or more UPS units.

Cables - Storage Units - Controllers

| | | | | | | | | | | | | | | | |
|--|--|--|-------------|----------------------------|------------------|---------|---------|---------|---------|------------|---------|---------|-----------------|--------|--------|
| F: | Female - External | Instructions: Identify Desired Controller Row and Storage Unit Column. The intersection of row and column contains the cable group letter which supports the connection. Go to the cable group under the corresponding storage unit for specific support. Read all Notes for row, column, and any cable group footnotes. | | | | | | | | | | | | | |
| M: | Male - External | | | | | | | | | | | | | | |
| I: | Internal | | | | | | | | | | | | | | |
| 68: | 16-bit, 68-pin High Density connector | | | | | | | | | | | | | | |
| 50: | 8-bit, 50-pin Centronix Connector | | | | | | | | | | | | | | |
| 0.8: | 16-bit, 68-pin Very High Density Connection Interface (VHDCI) 0.8 mm connector | | | | | | | | | | | | | | |
| 16: | 16-bit, 68-pin connector | | | | | | | | | | | | | | |
| 8: | 8-bit, 50-pin connector | | | | | | | | | | | | | | |
| | | Storage Unit | 3517xxx | 3518xxx | Repeater 94G7585 | 3519xxx | 35201RU | 35202RU | 3527xxx | 3510020 | 3503B0X | 3551001 | | | |
| | | Max.MB/sec.) ¹² | 20 | 20 | 20 | 20 | 40 | 40 | 80 | - | - | - | | | |
| | | LVDS | - | - | - | - | - | X | - | - | - | - | | | |
| | | Connector Type | F68 | F68 | F68 | F68 | F68 | F0.8 | SSA | F68 or F50 | F68 | F0.8 | | | |
| Description | Part Number | Max./Channel (MB/sec)¹² | LVDS | Connector Type/ Max | Note # | 5 | 6 | 16, 17 | 15, 17 | 11, 15 | 15, 23 | - | 20, 21 | 21, 22 | 15, 21 |
| Cable Group E (Long Wave Fibre) | | | | | | | | | | | | | | | |
| Customer supplied cables ≤ 10 KM (6.2 miles) | | ***** | - | n/a | L/W Fibre | - | - | - | - | - | - | - | - | - | - |
| Cable Group F (SSA) | | | | | | | | | | | | | | | |
| External SSA Cable, pair 1.0M | | 59H7220 | - | - | SSA | - | - | - | - | - | - | X | - | - | - |
| External SSA Cable, pair, 2.5M | | 59H7221 | - | - | SSA | - | - | - | - | - | - | X | - | - | - |
| External SSA Cable, pair, 5.0M | | 59H7222 | - | - | SSA | - | - | - | - | - | - | X | - | - | - |
| External SSA Cable, pair, 10.0M | | 59H7223 | - | - | SSA | - | - | - | - | - | - | X | - | - | - |
| External SSA Cable, pair, 25.0M | | 59H7224 | - | - | SSA | - | - | - | - | - | - | X | - | - | - |
| Cable Group G (Other) | | | | | | | | | | | | | | | |
| PC Server F/W to Fast External SCSI Cable-1M | | 70G9858 | - | - | M68-M50 | - | - | - | - | - | - | - | X ²⁰ | - | - |
| SCSI-2 16-bit Active Terminator | | 32G3918 | - | - | M68 | - | - | - | - | - | - | - | X | X | - |
| IBM SCSI Storage Extender Cable-split 6M | | 94G7594 | - | - | 3 x M68 | 14 | - | - | X | X | - | - | - | - | - |
| GBIC | | | | | | | | | | | | | | | |
| Netfinity Fibre Channel Short-Wave GBIC | | 03K9308 | - | n/a | SW Fibre | 13 | - | - | - | - | - | - | - | - | - |
| Netfinity Fibre Channel Long-Wave GBIC | | 03K9307 | - | n/a | L/W Fibre | - | - | - | - | - | - | - | - | - | - |

- Converts a F0.8mm into a F68-pin connector for attachment of an external M68 cable .
- Netfinity 5500 and 5500 M10 require IBM Netfinity SCSI Controller Cable (P/N 03K9313) to route the internal onboard SCSI RAID connector to an external F0.8 mm connector.
- Requires IBM Netfinity PCI SCSI Controller to Bulkhead Cable (P/N 94G7421) to route the internal onboard Ultra SCSI connector of a Netfinity 7000 to an external F68-pin connector.
- IBM Third Channel Cable (P/N 76H5400) routes the third (internal) SCSI RAID connector of IBM ServeRAID II Ultra SCSI Adapter (P/N 76H3584) external to the adapter. This is accomplished by replacing the two connector adapter interface plate with a three connector plate (included with the option).
- Storage unit 3517xxx supports attachment of 1 meter cables only.
- Storage unit 3518xxx requires IBM SCSI-2 F/W Enhanced Repeater (P/N 94G7585) for each attachment when cable lengths exceed 1 meter or in Twin-Tail configurations.
- PC Server 4.3M SCSI-2 F/W Rack Cable (P/N 94G5566) is supported in rack installations ONLY.
- Replaces IBM 3M External .8mm SCSI Cable (P/N 01K8028). Required in Twin-Tail configurations using EXP10 (P/N 35201RU).
- Supports attachment to Ultra-2 or single-ended SCSI controllers with operational speeds of up to Ultra-2. Controller, storage unit, cable length or storage device limitations may apply (see Max. MB/sec row and column above).
- Cable lengths exceeding 4.3 meters are NOT supported for attachment to non-Ultra-2 controllers.
- Installations with cable lengths greater than 2 meters are limited to SCSI Fast/Wide speeds of 20MB/S .
- Maximum supported speeds may be limited by installation of lower speed devices, controllers or cable lengths greater than 2 meters.
- Four short wave GBICs are included with Netfinity Fibre Channel Hub (P/N 35231RU).
- IBM SCSI Storage Extender Cable (P/N 94G7594) is used to daisy-chain two 3519xxx storage units to a single SCSI channel. Requires IBM .8mm to 68-pin SCSI Adapter (P/N 01K8017) for attachment to F0.8 controller connectors.
- Rack installation cable management requires devices to have a minimum cable length of 2 meters. Cable length requirements will vary based on placement within a single or multiple rack suite.
- Optional IBM SCSI-2 F/W Enhanced Repeater (P/N 94G7585) provides repeater function (required for cable lengths greater than 1 meter) and auto-sensing termination (required for twin-tail configurations) for external storage unit 3518xxx.
- IBM SCSI-2 F/W Enhanced Repeater (P/N 94G7585) provides SCSI repeater and auto-sensing termination for external storage unit 3519xxx. One is standard and the second is required for Twin-Tail configurations.
- Twin-Tail configurations with storage unit 35201RU require Netfinity EXP10 3M External Auto-Sensing Cables (P/N 03K9352).
- Connection to either Netfinity Fibre Channel Hub (P/N 35231RU) or Netfinity Fibre Channel PCI Adapter (P/N 01K7297) requires short wave fibre cables from Cable Group D.
- Cable groups B and C are for 16-bit tape drive installation while cable group G's P/N 70G9858 applies to 8-bit drives. External Storage Unit 3510020 comes equipped with both a F68 connector set for 16-bit tape drives and a F50 connector set for 8-bit drives. Attachment of cable P/N 70G9858 (Cable Group G) to a 0.8mm controller connector requires IBM .8mm to 68-pin SCSI Adapter (P/N 01K8017).
- Daisy chaining tape enclosures is not supported. Speeds are limited by cable lengths and installed devices.
- Requires SCSI-2 16-bit Active Terminator (P/N 32G3918).
- Attachment to wide ultra SCSI controllers limits operational speeds to Ultra SCSI (40 MB/s) for cables up to 2 meters in length and Fast/Wide SCSI (20 MB/s) for cable lengths between 2 meters and 4.3 meters. Ultra-2 controllers and cables allow cable lengths of up to 12 meters at up to 40 MB/s.
- RAID support for tape drives is limited to Non-RAID functions and utilization of a dedicated channel.





Important Notes

IBM reserves the right to change product specifications and to discontinue marketing products without notice.

*MHz only measures microprocessor internal clock speed, not application performance. Many factors affect application performance.

**When referring to hard drive capacity, MB stands for million bytes and GB stands for one thousand million bytes. Total user-accessible capacity may vary depending on operating environments.

***The quotation function within ConfigXPrt allows reseller specific pricing to be included.

****Tape Drives which utilize data compression technology have storage capacity that will vary depending upon whether the drive is operating in native mode (without compression) or compressed mode. The realistically achievable range that can be supported with verifiable data should be given (typically a 2:1 ratio).

Maximum internal hard disk drive capacities assume the replacement of any hard disk drives and the population of all hard disk drive bays with the largest currently supported drives available from IBM.

The information contained in this document has not been submitted to any formal IBM test and is distributed AS IS. The use of this information or the implementation of any of these techniques is a customer responsibility and depends on the customer's ability to evaluate and integrate them into the customer's operational environment. While each item may have been reviewed by IBM for accuracy in a specific situation, there is no guarantee that the same or similar results will be obtained elsewhere. Customers attempting to adapt these techniques to their own environments do so at their own risk.

For more information on IBM's statement of Limited Warranty, please call 1-800-772-2227 or contact your IBM representative or reseller. Copies are available upon request.

For products with Lotus SmartSuite, depending on the product, SmartSuite may be pre-loaded, included on a CD, or available for order on a CD at no charge. Diskettes and hard copy documentation available at an extra charge.

Energy Star compliance: The EPA, as a matter of policy, does not endorse any particular company or its products.

Unless otherwise stated, IBM makes no representations or warranties with respect to non-IBM products. Support (if any) for the non-IBM products is provided by the third party, not IBM.

Unless otherwise noted, phone numbers and fax numbers are valid only in the United States. Outside the United States, please call your local IBM for assistance.

Applications included in IBM products may vary from retail versions and may not include all documentation or functions. Not all products sold separately.

This publication was produced in the United States and modified for use in Asia Pacific South countries in Australia. IBM may not offer the products, services or features discussed in this document in other countries, and the information is subject to change without notice. Consult IBM country specific web sites or your local IBM representative for more information on the products, services and features available in your area.

©IBM Personal Computer Company

PO Box 400

Pennant Hills NSW 2120

AUSTRALIA

01/99

All the part numbers referenced in this publication are product part numbers and not service part numbers.

This publication could contain technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of this publication. IBM may make improvements and/or changes in the product(s) and/or program(s) described in this publication at any time. IBM reserves the right to alter specifications and other product information without notice. It is your responsibility to obtain the latest information.

Other part numbers in addition to those listed in this document may be required to support a specific device or function.

Data on competitive products is obtained from publicly obtained information and is subject to change without notice. Please contact the manufacturer for the most recent information.

This IBM equipment is subject to applicable rules and regulations of the United States Federal Communication Commission (FCC).

The following items are trademarks or registered trademarks of IBM Corporation in the United States or other countries or both: AT, Flo Thru, HelpWare, IBM, IntelliStation, LANStreamer, MWave, Netfinity, OS/2, Predictive Failure Analysis, SurePath, TechConnect, WIN-OS/2, 800-CALL-IBM, ServerProven™.

TME 10 Netfinity is a trademark of Tivoli Systems, an IBM Company. Lotus, Lotus Notes and Lotus SmartSuite are trademarks of Lotus Development Corporation.

Intel, Pentium Pro and Pentium II and MMX are trademarks or registered trademarks of Intel Corporation. Microsoft, Windows and Windows NT are trademarks or registered trademarks of the Microsoft Corporation. UNIX is a registered trademark in the United States and other countries or registered trademarks licensed exclusively through X/Open Company Limited. Trinitron is a trademark of the Sony Corporation. Java and HotJava are trademarks of Sun Microsystems, Inc. Adobe and PostScript are trademarks of Adobe Systems, Inc., APC is a trademark of American Power Conversion, Inc. All other registered trademarks and trademarks are properties of their respective owners.